

**Cub Cadet**<sup>®</sup>

**ENDURO SERIES**<sup>™</sup>

**FORCE SERIES**

**PRO SERIES**



**CATALOGUE  
2020**

# MORE POWER TO YOU

We know what our customers expect from their gardening equipment; power, performance, endurance and durability. That's why we strive for every Cub Cadet product to be the best in class.

We continuously endeavour to further improve our product ranges, by incorporating new and proven technologies, implementing innovative engineering solutions and offering service solutions and accessory ranges that deliver true advantages.

With constantly higher quality standards and power, we ensure you get the ultimate user experience. Power you can rely on again and again.



**"OUR CUSTOMERS GIVE US EXCELLENT FEEDBACK ON CUB CADET MACHINES.  
WE ARE TRULY PROUD TO HAVE BEEN A TRADING PARTNER OF THIS GREAT  
BRAND HERE IN THE SOUTH OF ENGLAND SINCE 1985."**

STEVE CANN & JILL VICKERY  
CUB CADET DEALER | GEORGE CANN GARDEN MACHINERY LTD. | BRAMDEAN | UNITED KINGDOM

## OUR HISTORY KEEPS US GOING

1961  
1<sup>st</sup> Cub Cadet  
garden tractor  
hits the market



1963  
1<sup>st</sup> shaft  
drive model



1980  
1<sup>st</sup> super  
garden tractor



1980  
1<sup>st</sup> twin cylinder  
engine



1966  
The world's 1<sup>st</sup>  
garden tractor  
with hydrostatic  
transmission



1972  
"Cadet" lawn  
tractor debuts



1985  
Breaking new ground  
in cut quality



1994  
1<sup>st</sup> lawn tractor  
with shaft drive



2005  
500 Series lawn tractors –  
Made in Germany

# CHAMPIONS – INSPIRED BY AMERICAN INGENUITY

Is it the power? The endurance? Or simply the fact, that you are ready for every challenge? There are many things that make Cub Cadet a true champion - and they all have one thing in common; a revolutionary garden tractor introduced to the US in the 1960s.

Back then a true milestone, and to this day a historic benchmark with regards to our standards and values; we continuously strive to exceed the high demands of our customers. With a mix of innovative engineering and user-friendly design, we want to inspire professionals, semi-professionals and ambitious outdoor enthusiasts alike. By creating innovative machines that are built for maximum efficiency, ease-of-use and maximum comfort.

That is what makes us proud - and turns you into a true champion.

Cub Cadet

<p>2007 Synchro-Steer® technology debuts, an Industry first</p>	<p>2011 50th anniversary celebration with innovation</p>	<p>2014 Introduction of the innovative Boosted-Airflow- Technology</p>	<p>2017 Introduction of the PRO SERIES zero-turns</p>	<p>2018 Introduction of the XM ENDURO SERIES lawnmowers</p>	<p>2020 Introduction of the XZ5 ULTIMA SERIES zero-turns</p>
					
					
<p>2009 Industry's tightest turning radius</p>	<p>2010 Most advanced residential zero-turn</p>	<p>2015 MySpeed – The innovative variable speed system</p>	<p>2017 Introduction of the XT ENDURO SERIES lawn tractors</p>	<p>2018 Introduction of the XR ENDURO SERIES robotic mowers</p>	

# Cub Cadet®

## THE CUB CADET PRODUCT HIGHLIGHTS FOR 2020

# EXTREMELY EFFICIENT

## XZ5 ULTIMA: INNOVATION AT ITS BEST

The XZ5 Ultima series redefines the zero-turn mowing experience - with enhanced strength, re-imagined comfort and a best-in-class cut.

The latest steering lever lap bar technology combined with the extremely robust construction of heavy-duty components and high-performance engine makes the Ultima series the ideal professional machines for large lawn maintenance.

Powerful Cub Cadet and Kawasaki engines mean the machines reach up to 7.5mph / 12 km/h, mowing up to 50% faster than front mowers and able to mow up to 12,500 m<sup>2</sup>/h. The open continuous tubular lightweight steel frame designed for strength and durability with its hinged/removable floor pan allows quick access to the deck and engine for easy maintenance. Available with cutting widths of 107 cm / 42", 127 cm / 50" and 137 cm / 54" the three machines put owner/operator comfort at the forefront of their design with individually adjustable seats and high backrests for fatigue-free working.

The Ultima series™ from Cub Cadet. Professional grade power for your business and your lawns. **More information on page 109.**

# XZ5

ENDURO SERIES™



**XT3** NOW WITH  
ENDURO SERIES™


*Cub Cadet*  
**TIGHT TURN  
XTREME**

Only 17 cm turning radius thanks to TIGHT TURN xTREME.



**MAXIMUM STRENGTH AND POWER FOR THE TOUGHEST TASKS**

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 are the ultimate lawn tractors. The XT3 range are brimming with power, capable of mowing dense grass and transporting larger loads including a mechanical differential lock that provides optimum traction however tough the terrain.




**GRASS BAG WITH ELECTRIC BAG LIFT**

At the touch of a button, the grass bag of the XT3 QR106e lifts up and tips the cuttings out.



**LARGE GRASS BAG**

Vast 360 litre capacity ensures maximum efficiency.



**ANTI-DUST SYSTEM**

Rear discharge with multi-layer dust apron included in the equipment protects against swirling grass and dirt.



**STRONG V-TWIN KAWASAKI ENGINE**

Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.



**WELDED MOWING DECK**

For high durability and robustness on the XT3 QS137.

**LT3** NOW WITH  
FORCE SERIES™

**NEW**

*Cub Cadet*  
ENGINES



**LEATHER-LOOK STEERING WHEEL**

High-quality sheath for secure grip. Available on the LT3 PR105 and LT3 PS107.

**COMFORTABLE SEAT WITH HIGH BACKREST ON ALL LT MODELS (EXC. LT1 NR76).**



All LT lawn tractors are equipped with a powerful and reliable Cub Cadet engine - developed in the USA.

**RevTEK™ TECHNOLOGY**

Reverse mowing technology. Allows you to cut while in reverse. Available on the LT3 PR105 and LT3 PS107.

**HYDROSTATIC TRANSMISSION**

Ensures a smooth and exacting drive.

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)

**Cub Cadet**<sup>®</sup>

THE CUB CADET PRODUCT SERIES FOR 2020

# EXCEED YOUR EXPECTATIONS

At Cub Cadet we are continually improving our product to meet the expectations and requirements of our customers.

Our FORCE SERIES models are suited to ambitious gardeners, the ENDURO SERIES™ fit the bill for expert users and our PRO SERIES is ideal for professionals.

These categories are designed to help you find the perfect machine for your needs.



## LAWNMOWERS

# 1

12-28  
29-40

LM Mowers  
XM Mowers



## MINI-RIDERS

# 2

41-48

LR Mini-Riders



## LAWN TRACTORS

# 3

49-58  
59-75  
76-78

LT Lawn Tractors  
XT Lawn Tractors  
Lawn Tractor Accessories



## ROBOTIC MOWERS

# 4

79-94  
95-96

XR Robotic Mowers  
Robotic Mower Accessories



## CHORE PERFORMERS

# 5

99  
100  
101

Scarifier  
Tiller  
Lawn Trimmer



## ZERO-TURNS

# 6

103-113  
114  
115-128  
129

XZ Zero-Turns  
XZ Accessories  
PRO Zero-Turns  
PRO Accessories



# Cub Cadet®

## FIND YOUR MODEL

### **FORCE SERIES** FOR AMBITIOUS GARDENERS

These entry-level machines are the perfect solution if you have a medium to large sized garden and are looking for a lawnmower with power, performance and durability.

### **ENDURO SERIES™** FOR EXPERT GARDENERS

Ideal for expert gardeners with a landscaped garden. If you are looking to “move up a level” then the added power and performance will allow you to finish your work faster and with better results. As an experienced gardener, you are looking for the perfect lawnmower to meet your high demands.

### **PRO SERIES** FOR PROFESSIONALS

A must if you are a true professional, a landscape gardener who is required to professionally maintain large park areas and public green spaces on a daily basis. You place great value on premium performance, absolute reliability of your equipment and the ultimate efficiency in use.

## THE FASTEST WAY TO YOUR IDEAL MODEL

Did you know that the cutting width of your lawnmower (the size of the cutting deck) is the key factor in determining how much time you need to mow your lawn. The larger the cutting width, the faster you're done.

Using the football field illustration as a guide, the diagrams on the next 3 pages will help illustrate the differences in the area of cutting achievable per hour for each of the Cub Cadet Series – Force, Enduro and PRO.

## CUTTING AREA EXAMPLE

With a 42cm / 16" cutting width, you can mow a 600m<sup>2</sup> lawn in about an hour (in collecting mode). Alternatively, with a 53cm / 21" cutting width, you can mow the same lawn in just 40 minutes.





# FORCE SERIES

## LM

### LM

### LAWNMOWERS

The LM lawnmowers in the FORCE SERIES are ideally suited for smaller and winding lawns. Push models with petrol engines cover more ground and self-propelled and MySPEED models drive the wheels making it even easier to cut the lawn.

### LR MINI-RIDERS

These mini-riders are the perfect choice when you need to mow a sizeable lawn but have narrow passages. Easy to use and compact in design these have the same strength, durability and cutting characteristics of our larger tractors.

### LT LAWN

### TRACTORS

The LT Lawn Tractors are the most powerful models in the FORCE SERIES. With the largest cutting decks and biggest collection bags as well as side discharge and rear collection models - dealing with larger lawns is made easier and more enjoyable.





**MULCHING OR  
DISCHARGING**



**COLLECTING &  
EMPTYING**

## LR

## LT

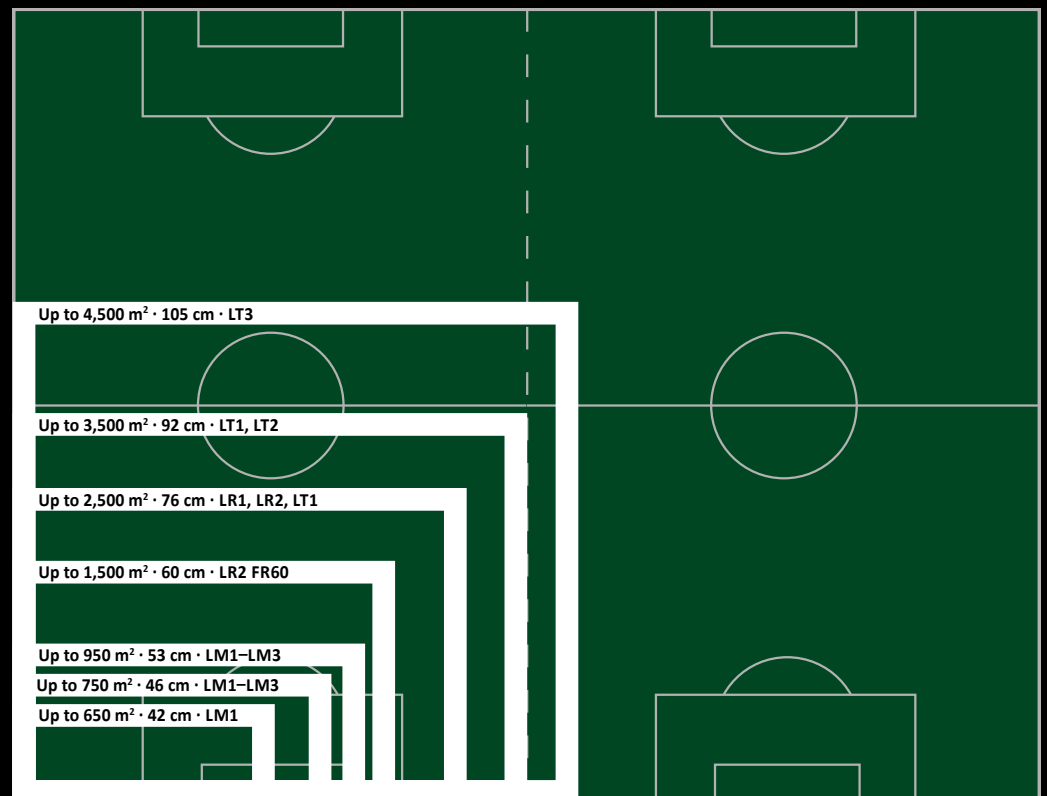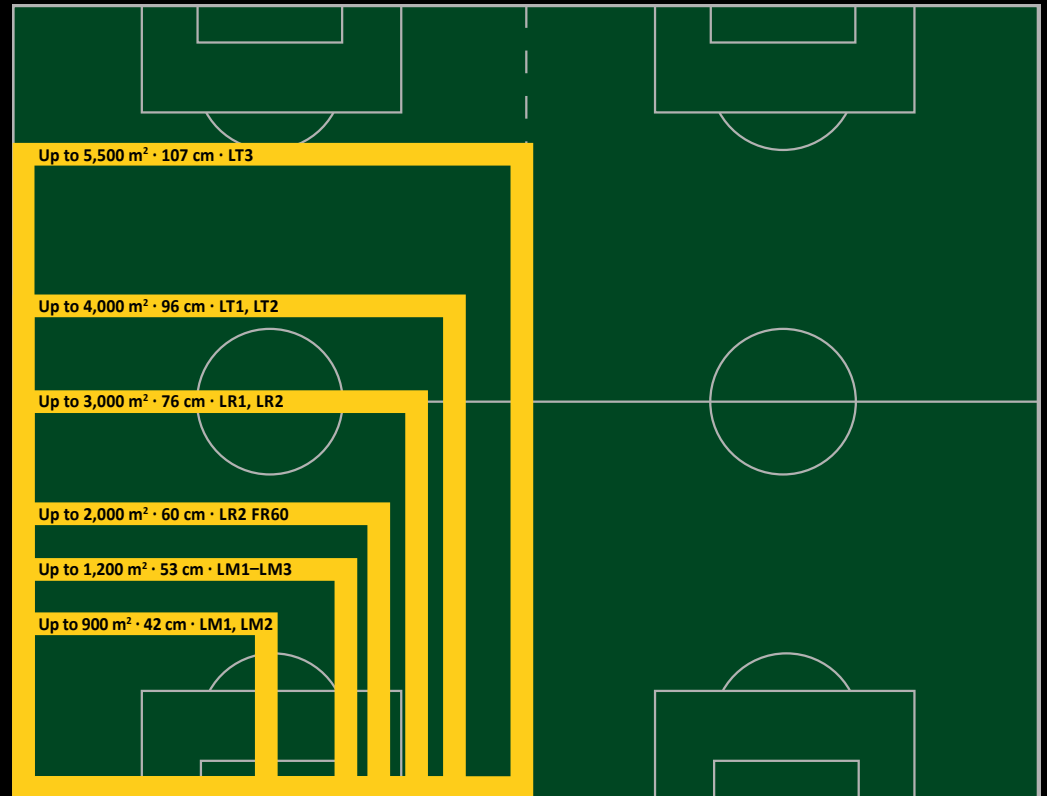

The above illustrations are to be used as a guide only as specifications and conditions will affect performance.

## ENDURO SERIES™

### XM

#### LAWNMOWERS

The XM Lawnmowers in the ENDURO SERIES are a step up in performance, innovation and design, packed with extensive features including 3T technology, variable speed and high-performance engines.


### XT

#### LAWN TRACTORS


Step up to unbeatable power, performance and efficiency from a range of lawn tractors that deliver best-in-class strength, durability and quality. With market leading features including the smallest turning circle and ultra-efficient EFI engines, these are the most innovative lawn tractors we have ever built.

### XZ ZERO-TURN

The XZ line up of Zero-Turns feature the innovative 360° turning technology, providing the ultimate manoeuvrability. XZ Zero-Turns with SyncroSteer benefit from full steering wheel control over all four wheels, perfect for hills and undulating terrain.

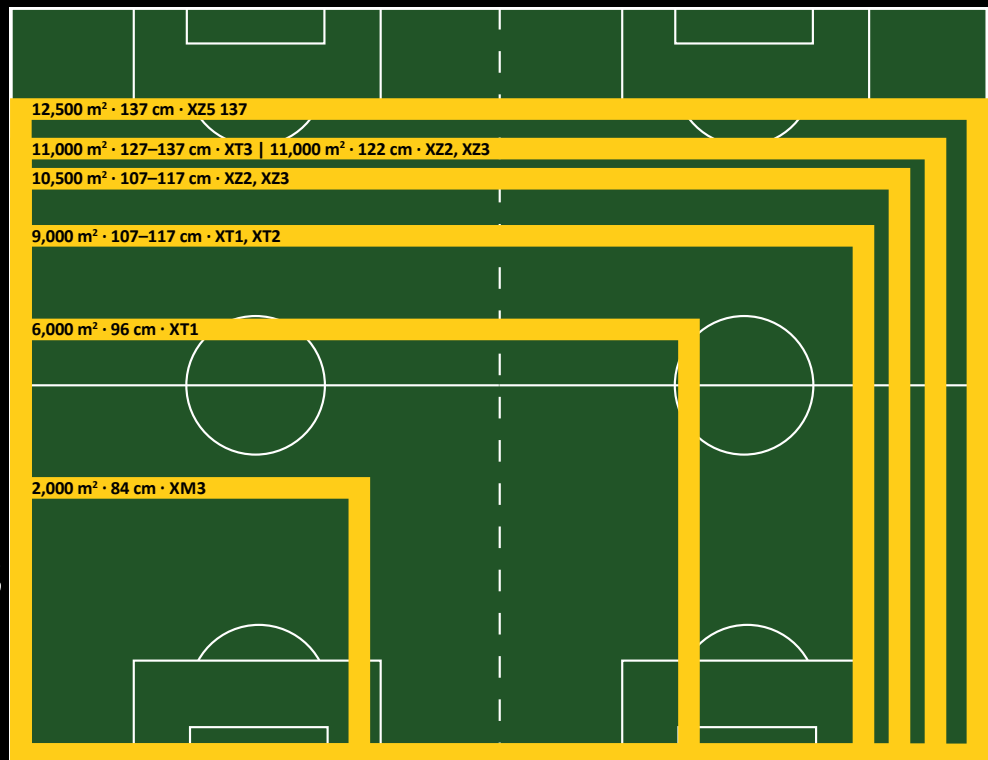

 **MULCHING OR DISCHARGING**

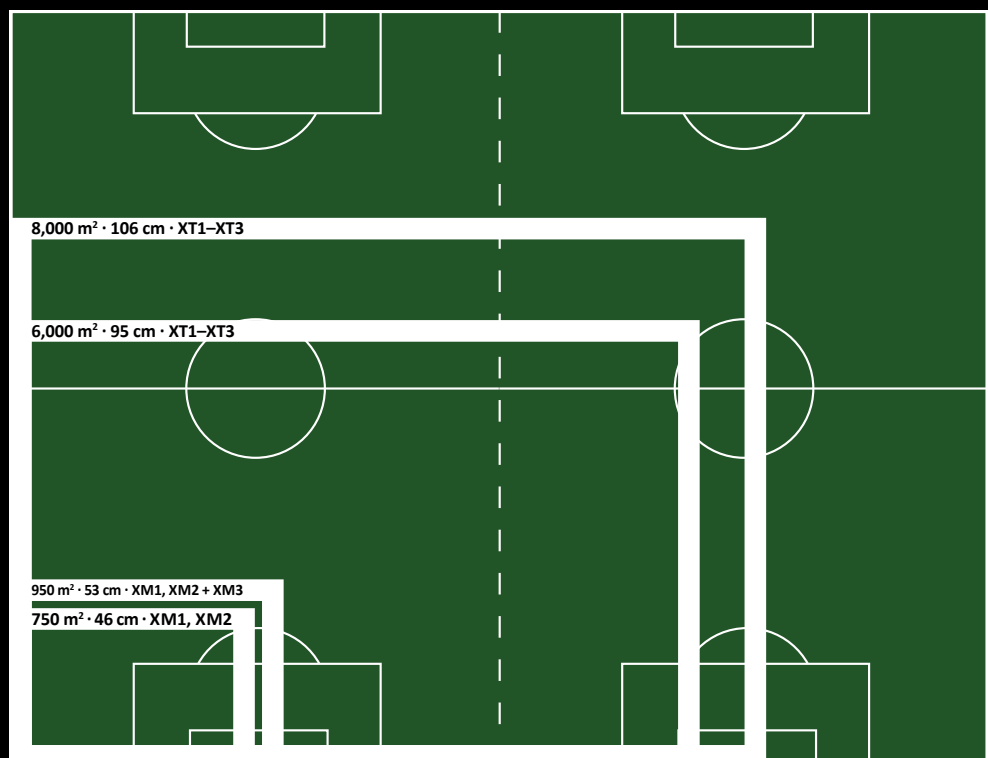

 **COLLECTING & DUMPING**

## PRO SERIES

# Z1 Z5 Z7

## PRO Z ZERO-TURN


The models in the PRO SERIES are the ultimate in performance, designed to handle the serious rigors of professional users. With outstanding speed, efficiency and comfort, these machines impress users on a daily basis.



MULCHING OR  
DISCHARGING



COLLECTING &  
EMPTYING

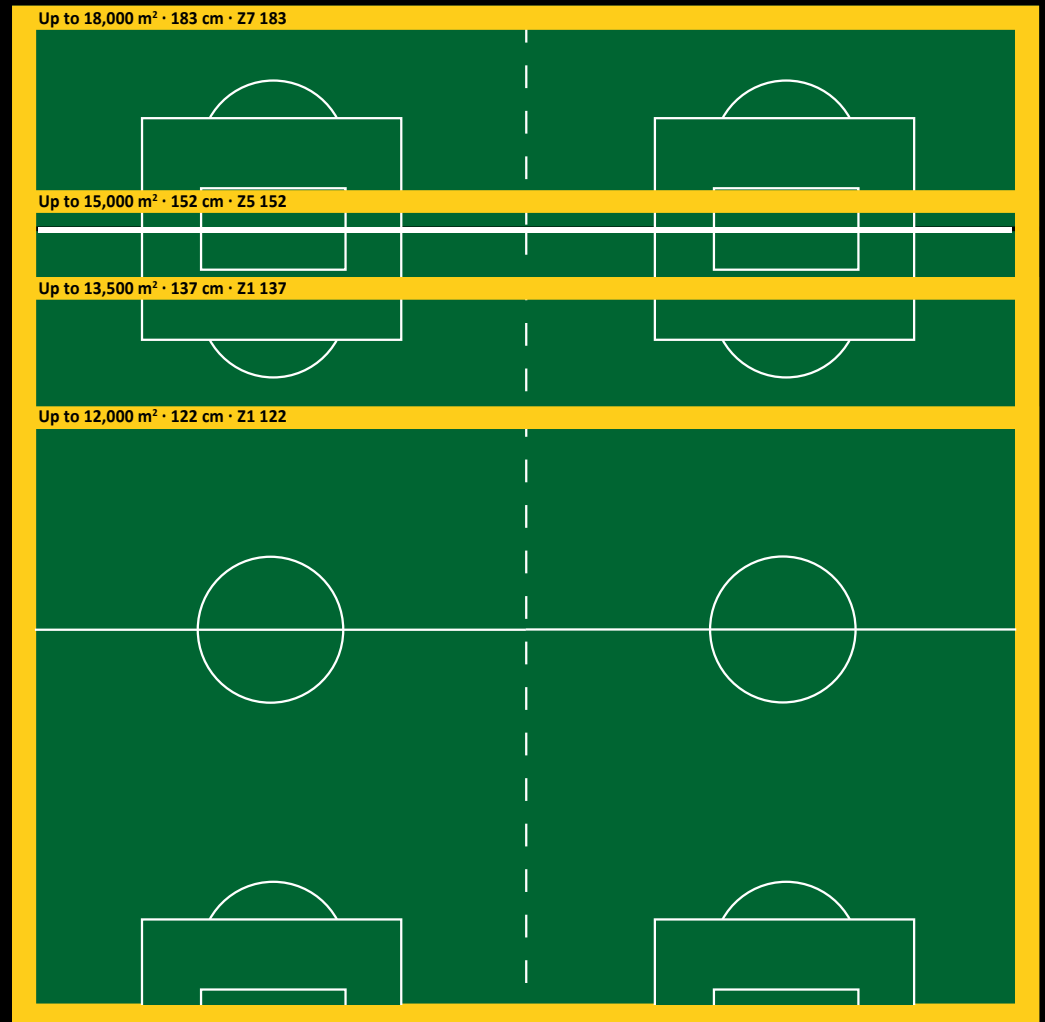

The above illustrations are to be used as a guide only as specifications and conditions will affect performance.

## PROFESSIONAL ZERO-TURNS

### Great Power, Zero-Turning Circle



The surface area illustrations are to show what could be achieved in 1 hour with optimal mowing conditions. There are several factors which can influence performance: the texture of the lawn, (height, density, humidity), the lawn area (hills, gradients, shapes and obstacles such as trees, ponds etc) and working temperature. For hills requiring ascending and descending, we recommend a more powerful model with a steering wheel.

*Cub Cadet*<sup>®</sup>





**LM**  
**FORCE SERIES**

**XM**  
**ENDURO SERIES™**

**HARD  
WORKING.  
EASY TO USE.**

**LAWNMOWERS**

A lawnmower should be easy to use, hard-working and deliver flawless performance with features that boast incredible control, unmatched efficiency and user comfort. If you are looking to maintain a small, irregular shaped lawn, or even larger undulating grounds, there is a size and model to meet your needs.

All Cub Cadet lawnmowers are guaranteed to deliver the pristine Cub Cadet cut, mow after mow, season after season.

**Cub Cadet**<sup>®</sup>

**LM1**  
**FORCE SERIES**



# 3-in-1 OPTION

## COLLECT, DISCHARGE & OPTIONAL MULCHING

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.

1

LAWNMOWERS

## LM SERIES – PERFECT CUT AND PERFECT COLLECTION

Their tough construction ensures a long life cycle and the Cub Cadet OHV engine delivers power and performance to meet and exceed your demands.

With the Cub Cadet LM Range, you have the choice between collecting and discharging the clippings and lots of other useful features including easy-to-empty grass bag, ergonomically formed handle, convenient central height adjustment and ball bearing wheels. Mowing the lawn with a LM lawnmower is more pleasure, than a chore.

### KEY BENEFITS

#### LARGE GRASS BAG

Reduces the amount of time emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.

The cloth bag fits through the mower's handle to secure it in place and can easily be removed. A quick, simple and efficient system.

#### CENTRAL CUTTING HEIGHT ADJUSTMENT

Comfortably change the cutting height centrally with one lever – choose from 6 different positions giving a cutting height range from 28 - 92mm.

#### ERGONOMIC HANDLE

Gives you full control of the lawnmower with the most comfortable hand position. The handle is fully foldable for space-saving storage and easy transport.

#### SELF-PROPELLED

Making mowing on sloping and expansive terrain a breeze. Varispeed models can adapt to your personal pace.





## LM1 SERIES

The Cub Cadet LM1 range feature a 3-in-1 option, which gives you the choice between grass bag and discharging the clippings and the option to mulch with a mulch accessory kit.

## MODELS AVAILABLE



**LM1 AP42**

<b>Cutting width:</b>	42 cm / 16"
<b>Mowing area:</b>	650 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	60 l
<b>Engine:</b>	Cub Cadet 35 OHV, Pull starter
<b>Engine displacement:</b>	79 cm <sup>3</sup>
<b>Drive:</b>	Push
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	11A-LQMG603



**LM1 AR42**

<b>Cutting width:</b>	42 cm / 16"
<b>Mowing area:</b>	650 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	60 l
<b>Engine:</b>	Cub Cadet 35 OHV, Pull starter
<b>Engine displacement:</b>	79 cm <sup>3</sup>
<b>Drive:</b>	Rear-wheel drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12A-LQMG603



**LM1 AP46**

<b>Cutting width:</b>	46 cm / 18"
<b>Mowing area:</b>	700 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	60 l
<b>Engine:</b>	Cub Cadet 35 OHV, Pull starter
<b>Engine displacement:</b>	79 cm <sup>3</sup>
<b>Drive:</b>	Push
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	11A-TQMG603



## THE 4TH AND 5TH LETTER IN THE MOWER NAME

Cub Cadet products are named to showcase their technical information and details.

The 4th letter of the product name always indicates the engine displacement. For walk behind mowers the letters stand for:

<b>A = up till 99 cc</b>	<b>E = 176–200 cc</b>	<b>I = 276–300 cc</b>
<b>B = 100–125 cc</b>	<b>F = 201–225 cc</b>	<b>J = 301–325 cc</b>
<b>C = 126–150 cc</b>	<b>G = 226–250 cc</b>	<b>K = 326–350 cc</b>
<b>D = 151–175 cc</b>	<b>H = 251–275 cc</b>	<b>L = 351–375 cc</b>

The 5th letter shows whether it's a push mower or self-propelled via rear- or front-wheel drive:

- P = push mower**
- F = front-wheel drive**
- R = rear-wheel drive**

Additional lower-case letters signal further special product features and benefits, e.g.:

- e = electric starter**
- s = MySpeed**



**LM1 AR46**

<b>Cutting width:</b>	46 cm / 18"
<b>Mowing area:</b>	700 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	60 l
<b>Engine:</b>	Cub Cadet 35 OHV, Pull starter
<b>Engine displacement:</b>	79 cm <sup>3</sup>
<b>Drive:</b>	Rear-wheel drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12A-TQMG603



**LM1 CR53**

<b>Cutting width:</b>	53 cm / 21"
<b>Mowing area:</b>	950 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	70 l
<b>Engine:</b>	Cub Cadet 45 OHV, Pull starter
<b>Engine displacement:</b>	140 cm <sup>3</sup>
<b>Drive:</b>	Rear-wheel drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12B-PQSC603

*Cub Cadet*<sup>®</sup>



# MOW AT YOUR OWN PACE

The intuitive, state-of-the-art MySPEED™ handle on our LM2 and LM3 lawnmowers means that the lawnmower drives at your walking speed. Simply grab the handle, start to walk and see how easy and relaxing mowing can be.

The MySPEED™ system delivers high-performance and industry-leading control with ultra-soft rubber grips to reduce vibrations and operator fatigue. With a MySPEED™ equipped lawnmower, you will experience smoother engagement, superior speed variability and enhanced traction – all with no effort and whilst simply walking at your natural pace.



## **MY SPEED**

### **THE MYSPEED DRIVE SYSTEM**

The wheel drive is automatically switched on as soon as you push the handle forward. The speed automatically adjusts to your walking speed.



## **MY SPEED EVO**

### **THE MYSPEED EVO DRIVE SYSTEM**

MySpeed EVO allows you to adjust your working speed to any given terrain even more precisely than ever before. Simply reduce your maximum working speed to precisely manoeuvre around obstacles such as flower beds or trees before returning to full speed on long and open stretches (only on XM2 DR46s, see page 32).

## KEY BENEFITS

# LM2

FORCE SERIES

**ELECTRIC START**  
Get your lawnmower started with the turn of a key.

**MySPEED™  
VARIABLE SPEED  
CONTROL**  
With a variable drive speed system you will set your mowing pace, not the lawnmower.

**HEIGHT ADJUSTABLE  
HANDLE**  
The handle can be matched to your preferred height, providing a stress and fatigue free mowing experience.

**CENTRAL CUTTING  
HEIGHT ADJUSTMENT**  
One lever adjusts all four wheels simultaneously. The conveniently placed central lever enables six different cutting heights from 28 – 92mm.

**LARGE GRASS BAG**  
A large grass bag reduces the amount of time spent emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.



# 3-in-1

## COLLECT, DISCHARGE & MULCHING.

3-in-1 means that you have the choice between collecting the clippings, discharging them out the back, or mulching.

Mulching means that the grass is cut several times and then equally distributed onto the ground where it can be used as a natural fertiliser; good for the environment and good for your lawn.. Plus there is no collecting or grass disposal which saves you time.

## LM2 SERIES – POWERFUL AND COMFORTABLE

Our LM2 series mowers come with powerful Cub Cadet engines and many comfort features. First and foremost, there's the MySpeed variable speed drive, which makes mowing incredibly comfortable and flexible. Simply walk at your own pace, and the LM2 series mower reacts to your desired walking speed, meaning a relaxed mowing experience.

## MODELS AVAILABLE



**3-in-1**  
POWERED BY  
**Cub Cadet**  
**MYSPEED**

### LM2 DR46s

<b>Cutting width:</b>	46 cm / 18"
<b>Mowing area:</b>	750 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	60 l
<b>Engine:</b>	Cub Cadet 55 OHV, Pull starter/AutoChoke
<b>Engine displacement:</b>	159 cm <sup>3</sup>
<b>Drive:</b>	Rear-wheel drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12BBTQKC603



**3-in-1**  
POWERED BY  
**Cub Cadet**  
**MYSPEED**

### LM2 DR46es

<b>Cutting width:</b>	46 cm / 18"
<b>Mowing area:</b>	750 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	60 l
<b>Engine:</b>	Cub Cadet 55 OHV, Electric starter
<b>Engine displacement:</b>	159 cm <sup>3</sup>
<b>Drive:</b>	Rear-wheel drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12BCTQS7603



**3-in-1**  
POWERED BY  
**Cub Cadet**  
**MYSPEED**

### LM2 DR53s

<b>Cutting width:</b>	53 cm / 21"
<b>Mowing area:</b>	950 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	70 l
<b>Engine:</b>	Cub Cadet 55 OHV, Pull starter/AutoChoke
<b>Engine displacement:</b>	159 cm <sup>3</sup>
<b>Drive:</b>	Rear-wheel drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12BBPQKC603

**Cub Cadet**<sup>®</sup>



## **LM3 SERIES – STRONG PERFORMANCE AND MAXIMUM FLEXIBILITY**

The flagship models of the LM Series will impress you with their superb features; a range of powerful engines for rapid mowing, the 4-in-1 system for total flexibility in mowing options, variable driving speed with MySpeed available on all models and many more convenient features. So you're guaranteed to find the Cub Cadet lawnmower that perfectly meets your demands and requirements.

# 4-in-1

## COLLECTION, REAR DISCHARGE, SIDE DISCHARGE & MULCHING

4-in-1 means you have the choice of four different options for disposing of the grass clippings, giving you the flexibility to mow your way. A 4-in-1 lawnmower offers the freedom to select the ideal discharge solution for all conditions.

### MODELS AVAILABLE



#### HIGH REAR WHEELS

High rear wheels let you negotiate potholes and uneven lawns effortlessly, for ultra-comfortable handling and smooth driving.



#### HARD-TOP BAG WITH FILL INDICATOR

The dustproof hard-top means less dust during dry periods, while the fill indicator flap indicates when the grass bag is full and needs emptying.



#### EASY STARTING ENGINE

The Briggs & Stratton engines with ReadyStart® Technology and Start Guarantee® let you start the mower more easily and confidently.



#### LM3 CR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	60 l
Engine:	B&S 575 EX-Series, ReadyStart®, Pull starter
Engine displacement:	140 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model no.:	12CBTV5E603



#### LM3 CR53s

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	70 l
Engine:	B&S 625 EXi Series, ReadyStart®, Pull starter
Engine displacement:	150 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model no.:	12CBPV5L603



#### LM3 DR53es

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 55 OHV ES, Electric
Engine displacement:	159 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model no.:	12CCPV57603

## LM1 AP42

## LM1 AR42

ENGINE		
Engine type	Cub Cadet 35 OHV	Cub Cadet 35 OHV
Engine displacement	79 cm <sup>3</sup>	79 cm <sup>3</sup>
Rated power	1.5 kW / 2,800 min <sup>-1</sup>	1.5 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Pull
Tank volume (capacity)	0.75 l	0.75 l
DRIVE SYSTEM		
Drive	Push	Rear-wheel drive
Selectable speeds	–	1
Speed (max)	–	3.6 km/h
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	650	650
Cutting deck (material)	Steel	Steel
Cutting width	42 cm / 16"	42 cm / 16"
Cutting options	3-in-1 Option	3-in-1 Option
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Optional (196-588-678)	Optional (196-588-678)
Side discharge	–	–
Rear discharge without collector	Standard	Standard
GRASS BAG		
Grass bag type	Soft bag	Soft bag
Grass bag capacity	60 l	60 l
Bag full indicator	–	–
WHEELS		
Wheels (F/R)	180 mm / 200 mm	180 mm / 200 mm
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	Soft-Grip	Soft-Grip
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	84/94/96
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	150 cm / 46 cm / 114 cm	155 cm / 49 cm / 98.5 cm
Net weight	28 kg	31 kg
Model number	11A-LQMG603	12A-LQMG603
EAN	4 008423 892383	4 008423 892369



## LM1 AP46

## LM1 AR46

ENGINE		
Engine type	Cub Cadet 35 OHV	Cub Cadet 35 OHV
Engine displacement	79 cm <sup>3</sup>	79 cm <sup>3</sup>
Rated power	1.5 kW / 2,800 min <sup>-1</sup>	1.5 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Pull
Tank volume (capacity)	0.75 l	0.75 l
DRIVE SYSTEM		
Drive	Push	Rear-wheel drive
Selectable speeds	–	1
Speed (max)	–	3.6 km/h
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	700	700
Cutting deck (material)	Steel	Steel
Cutting width	46 cm / 18"	46 cm / 18"
Cutting options	3-in-1 Option	3-in-1 Option
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Optional (196-588-678)	Optional (196-588-678)
Side discharge	–	–
Rear discharge without collector	Standard	Standard
GRASS BAG		
Grass bag type	Soft bag	Soft bag
Grass bag capacity	60 l	60 l
Bag full indicator	–	–
WHEELS		
Wheels (F/R)	180 mm / 200 mm	180 mm / 200 mm
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	Soft-Grip	Soft-Grip
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	84/94/96
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	155 cm / 49 cm / 114 cm	155 cm / 49 cm / 114 cm
Net weight	28 kg	31 kg
Model number	11A-TQMG603	12A-TQMG603
EAN	4 008423 892390	4 008423 892406

## LM1 CR53




## LM2 DR46es

ENGINE		
Engine type	Cub Cadet 45 OHV	Cub Cadet 55 OHV
Engine displacement	140 cm <sup>3</sup>	159 cm <sup>3</sup>
Rated power	2.1 kW / 2,800 min <sup>-1</sup>	2.5 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Electric
Tank volume (capacity)	1.0 l	1.0 l
DRIVE SYSTEM		
Drive	Rear-wheel drive	Rear-wheel drive
Selectable speeds	1	Variable
Speed (max)	3.6 km/h	0–3.6 km/h
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	950	750
Cutting deck (material)	Steel	Steel
Cutting width	53 cm / 21"	46 cm / 18"
Cutting options	3-in-1 Option	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Optional (196-589-678)	Standard
Side discharge	–	–
Rear discharge without collector	Standard	Standard
GRASS BAG		
Grass bag type	Soft bag	Soft bag
Grass bag capacity	70 l	60 l
Bag full indicator	–	–
WHEELS		
Wheels (F/R)	200 mm / 200 mm	180 mm / 200 mm
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	MySpeed
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	Soft-Grip	–
DIMENSIONS		
LpA/LwA/LwAg (dB)	86/96/98	84/94/96
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	150 cm / 49 cm / 114 cm
Net weight	34 kg	35 kg
Model number	12B-PQSC603	12BCTQS7603
EAN	4 008423 872637	4 008423 866247

## LM2 DR53s

## LM3 CR46s

## LM3 CR53s

ENGINE			
Engine type	Cub Cadet 55 OHV	B&S 575 EX-Series, ReadyStart®	B&S 625 EXi Series, ReadyStart®
Engine displacement	159 cm <sup>3</sup>	140 cm <sup>3</sup>	150 cm <sup>3</sup>
Rated power	2.5 kW / 2,600 min <sup>-1</sup>	2.1 kW / 2,800 min <sup>-1</sup>	2.2 kW / 2,800 min <sup>-1</sup>
Engine start	Pull/AutoChoke	Pull	Pull
Tank volume (capacity)	1.0 l	0.8 l	1.0 l
DRIVE SYSTEM			
Drive	Rear-wheel drive	Rear-wheel drive	Rear-wheel drive
Selectable speeds	Variable	Variable	Variable
Speed (max)	0–3.6 km/h	0–3.6 km/h	0–3.6 km/h
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> h	950	750	950
Cutting deck (material)	Steel	Steel	Steel
Cutting width	53 cm / 21"	46 cm / 18"	53 cm / 21"
Cutting options	3-in-1	4-in-1	4-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm	28–92 mm
Grass bag	Standard	Standard	Standard
Mulch Kit(Product code)	Standard	Standard	Standard
Side discharge	–	Standard	Standard
Rear discharge without collector	Standard	Standard	Standard
GRASS BAG			
Grass bag type	Soft bag	Soft bag with hard top	Soft bag with hard top
Grass bag capacity	70 l	60 l	70 l
Bag full indicator	–	Standard	Standard
WHEELS			
Wheels (F/R)	200 mm / 280 mm	180 mm / 280 mm	200 mm / 280 mm
Double ball bearings	Standard	Standard	Standard
COMFORT			
Washing nozzle	Standard	Standard	Standard
Handle type	MySpeed	MySpeed	MySpeed
Foldable handle	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard
Handle covering	–	–	–
DIMENSIONS			
LpA/LwA/LwAg (dB)	86/96/98	84/94/96	86/96/98
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	155 cm / 49 cm / 114 cm	162 cm / 58 cm / 114 cm
Net weight	34 kg	34 kg	36 kg
Model number	12BBPQKC603	12CBTV5E603	12CBPV5L603
EAN	 4 008423 866131	 4 008423 859324	 4 008423 859355

## THE BEST CUB CADET MOWERS ON THE MARKET

# XM

ENDURO SERIES™

### —3T— *Cub Cadet* — TECHNOLOGY

Grass cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance and preventing cuttings becoming stuck or left on the lawn.

#### ① A CHOICE OF AVAILABLE TRANSMISSION TYPES



- **Manual**  
(XM1 DP46)



- **Single Speed**  
(XM1 DR46, XM1 ER53)



- **VarioSpeed** – 6 speeds, perfect for any setting  
(XM2 ER53, XM2 DR46, XM2 ER53e).



- **MySpeed EVO** – automatically adjusts to your walking speed. The maximum speed can be preset using a range of detents  
(XM2 DR46s).



**MYSPEED EVO**



- **Variable drive** – Stepless speed via controller (XM3 ER53).



#### AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine.

**BEST  
IN  
CLASS**

- 2** **LARGE GRASS BAG** (65/75/80 Litres) with full indicator & dust cover
- 3** **ADJUSTABLE HANDLE HEIGHT** for your comfort
- 4** **CONVENIENT CENTRAL 6-STEP CUTTING HEIGHT ADJUSTMENT** to achieve the finished grass height you require
- 5** **ELECTRIC START AT THE TOUCH OF A BUTTON (XM2 ER53e)** for ease of use
- 6** **3-in-1 MULCH KIT** means that you have the choice between collecting the clippings, discharging them out the back or



### POWERFUL ENGINES WITH LARGE DISPLACEMENT

**Cub Cadet** ENGINES One XM2 mower and all XM1 mowers come complete with powerful Cub Cadet engines that extend the service life of your lawnmower with outstanding performance particularly on tall grass.

**HONDA** ENGINE Two XM2 mowers feature Honda engines that are notably quiet and produce lower noise and vibration levels during operation.


### ROBUST DESIGN AND HIGH-QUALITY COMPONENTS

The single die-cast housing is extremely robust: there are no screws that can come loose ensuring the machine is easy for you to use. Tough front and side bumpers protect the mower from obstacles.



### FAST CLEANING

An integrated mowing deck washing nozzle and a special cleaning position mean raising, rinsing and cleaning the body couldn't be easier.

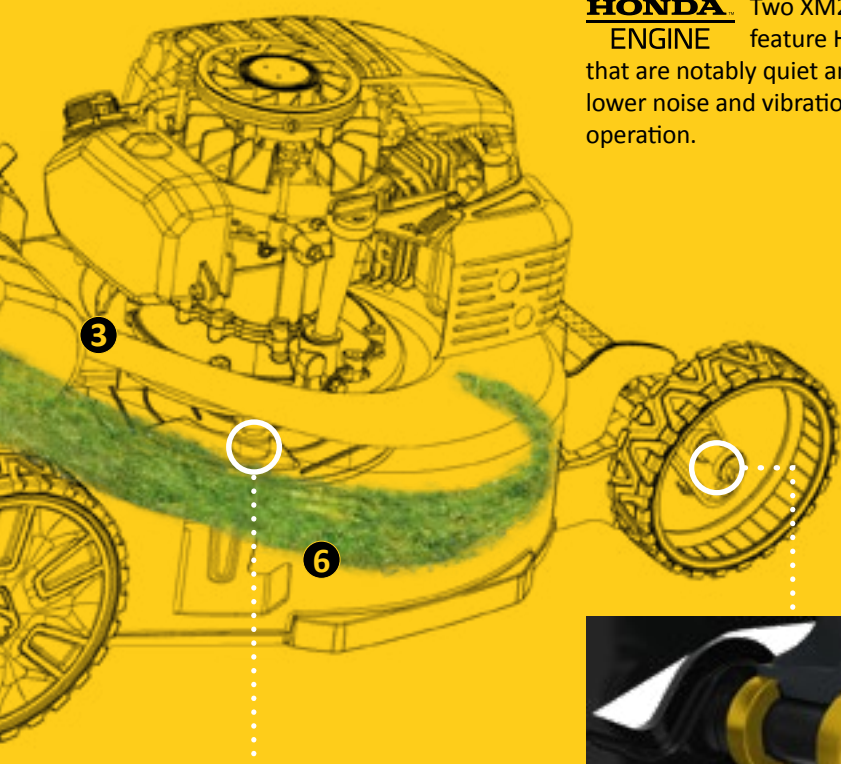

### TOP-QUALITY WHEELS

Each with double ball bearings for optimal running performance and durability.

For more information and videos.



**Cub Cadet**<sup>®</sup>

**XM1**  
**ENDURO SERIES™**



## **UNDERPINNING THE VERY BEST RESULTS**

The XM1 lawnmowers break new ground when it comes to power, performance and precision. The premium aluminium decks are durable and easy to clean with smooth, balanced engines that deliver exceptional performance with minimal vibrations.

The XM1 lawnmowers benefit from Cub Cadet 3T Technology, ensuring perfect mowing results cut after cut, season after season.

## KEY BENEFITS



### —3T— *Cub Cadet* TECHNOLOGY

A specially developed geometry inside the mower housing ensures all cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance.



### AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine for smooth and easy use for you.



### FAST CLEANING

The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle makes cleaning the housing easier.



### POWERFUL CUB CADET ENGINE

Delivers the power you need for faster and easier mowing. Ultra-durable engines offer unrivalled performance, especially on long grass.

For more information and videos.



## MODELS AVAILABLE



**3-in-1**  
POWERED BY *Cub Cadet*

### XM1 DR46

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	65 l
Engine:	Cub Cadet 55 OHV, Pull starter
Engine displacement:	159 cm <sup>3</sup>
Drive:	SingleSpeed
Cutting height adjustment:	6 positions/central
Model no.:	12A-YAKC603



**3-in-1**  
POWERED BY *Cub Cadet*

### XM1 ER53

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	75 l
Engine:	Cub Cadet 65 OHV, Pull starter
Engine displacement:	196 cm <sup>3</sup>
Drive:	SingleSpeed
Cutting height adjustment:	6 positions/central
Model no.:	12A-ZAJ4603

**Cub Cadet**<sup>®</sup>



For more  
information  
and videos.



## EVERYTHING A LAWNMOWER NEEDS TO BE

The Cub Cadet XM2 lawnmowers offer you the best of both worlds. In addition to the XM1 features they incorporate either VarioSpeed or MySpeed™ EVO wheel drive, adjusting to any situation or your walking speed, as well as powerful Cub Cadet engine, whilst still having 3T technology.



## KEY BENEFITS



TURBO TUNNEL


### —3T— *Cub Cadet*™ TECHNOLOGY

A specially developed geometry inside the mower housing ensures all cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance.




### POWERFUL ENGINES

Get the power you need for fast and efficient working with the powerful Cub Cadet engine or the smooth Honda engine.



### FAST CLEANING

The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle makes cleaning the housing easier.



### VARIOSPEED

6 speeds, perfect for any setting. (XM2 DR46, XM2 ER53e)

### MySpeed™ EVO

Automatically adjusts to your walking speed. The maximum speed can be preset. (XM2 DR46s)



### AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine for smooth and easy use for you.



### ELECTRIC STARTER

The XM2 ER53e engine starts easily at a push of a button.

## MODELS AVAILABLE



**3-in-1**  
**HONDA**  
ENGINE

### XM2 DR46

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	65 l
Engine:	Honda GCV 160, Pull
Engine displacement:	160 cm <sup>3</sup>
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central
Model no.:	12AQYADQ603



**3-in-1**  
**HONDA**  
ENGINE  
**MYSPEED EVO**

### XM2 DR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	65 l
Engine:	Honda GCV 160, Pull
Engine displacement:	160 cm <sup>3</sup>
Drive:	MySpeed EVO
Cutting height adjustment:	6 positions/central
Model no.:	12ABYADQ603



**3-in-1**  
**POWERED BY**  
**Cub Cadet**

### XM2 ER53e

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	75 l
Engine:	Cub Cadet 65 OHV ES, Electric
Engine displacement:	196 cm <sup>3</sup>
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central
Model no.:	12ARZA9A603

## **XM3** ENDURO SERIES™



For more  
information  
and videos.



**3-in-1**

Powered by  
**Kawasaki**

### **XM3 ER53**

<b>Cutting width:</b>	53 cm / 21"
<b>Mowing area:</b>	950 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	80 l
<b>Engine:</b>	Kawasaki FJ 180 V KAI, Pull starter
<b>Engine displacement:</b>	179 cm <sup>3</sup>
<b>Drive:</b>	Variable drive
<b>Cutting height adjustment:</b>	6 positions/central
<b>Model no.:</b>	12AQZBK2603

\* While stocks last

# OUR TOP MODEL FOR EFFICIENT MOWING

The Cub Cadet XM3 ER53 delivers everything you could want from a lawnmower; exceptional mowing performance, efficiency, easy handling and a professional appearance.

High performance comes from the powerful Kawasaki engine that gets more output than you'd expect from every cubic cm of engine displacement.

The blade-brake clutch allows the engine to keep running even when the blade is disengaged, so you don't have to restart the engine every time.

The XM3 ER53 is a must-have machine ideal for both professional and expert gardener use, making short work of even large lawns by combining strength and efficiency.

## KEY BENEFITS



### BLADE-BRAKE CLUTCH (BBC)

This feature will keep the engine running with the mowing deck switched off, providing safety when you are emptying the grass bag and saving you time because there's no need to restart the engine.



### HEAVY DUTY TRANSMISSION

The aluminium housing on the transmission gives you more durability and longer machine life.



### STEEL RIMS


Supported by ball bearings the steel rims improve the running quality and give you better stability.



### POWERFUL ENGINE

The professional Kawasaki FJ 180 V Kai engine gets more output than you'd expect from every cubic cm of engine displacement, giving you the power to negotiate and mow slopes up to 30°.

# Cub Cadet®



2-in-1



## XM3 KR84es

Cutting width:	84 cm / 33"
Mowing area:	2,000 m <sup>2</sup> /h
Ejection type:	Side discharge
Engine:	B&S 3105 Series, electric starter
Engine displacement:	344 cm <sup>3</sup>
Drive:	Variable drive
Cutting height adjustment:	8 positions/central
Model number:	12AE764U603

# STRONG FEATURES, EASY OPERATION

The Cub Cadet XM3 KR84es is not just a regular lawnmower. It's a large-area mower. Thanks to the extremely large cutting width and high-performance engine, you can easily mow a large area in a short time. A combination of strength and efficiency makes your work easy.


You'll find incredible strength in its powerful engine. You'll experience ultimate efficiency thanks to an 84 cm (33") steel cutting deck and zero-turn manoeuvrability.

The variable four speed system allows you to set your speed based on the environment and personal preference. Front caster wheels enable easy manoeuvrability, while large rear pneumatic wheels grip the ground for superior traction over uneven terrain.



#### HIGH-PERFORMANCE ENGINE

The reliable B&S OHV E-Start engine provides enough power even for long grass and on inclines.



#### LARGE PETROL TANK WITH A CAPACITY OF 7.5 L

Longer mowing times due to less fuel consumption.



#### ELECTRIC STARTER

Starts the engine comfortably at the turn of a key.




#### ZERO-TURNING CIRCLE

Swivelling front caster wheels and pneumatic rear wheels.



#### CENTRAL CUTTING HEIGHT SETTING

The cutting height can be adjusted in eight stages from 25–100 mm using a single lever.



#### WIDE CUT DECK

84 cm / 33" steel wide cut deck with 2-in-1 option.

## XM1 DR46


## XM1 ER53

ENGINE		
Engine type	Cub Cadet 55 OHV	Cub Cadet 65 OHV
Engine displacement	159 cm <sup>3</sup>	196 cm <sup>3</sup>
Rated power	2.5 kW / 2,800 min <sup>-1</sup>	3.3 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Pull
Tank volume (capacity)	1.0 l	1.0 l
DRIVE SYSTEM		
Drive	SingleSpeed	SingleSpeed
Number of speeds	1	1
Speed (max)	3.9 km/h	3.9 km/h
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> /h	750	950
Cutting deck (material)	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"
Cutting options	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min-max)	20-90 mm	20-90 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Standard	Standard
Side discharge	-	-
Rear discharge without collector	Standard	Standard
GRASS BAG		
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	75 l
Bag full indicator	Standard	Standard
WHEELS		
Wheels (F/R)	200 mm / 240 mm	200 mm / 240 mm
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	86/96/98
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm	189 cm / 55 cm / 103 cm
Net weight	42 kg	45 kg
Model number	12A-YAKC603	12A-ZAJ4603
EAN	 4 008423 882049	 4 008423 882070

## XM2 DR46

1

LAWNMOWERS

ENGINE	
Engine type	Honda GCV 160
Engine displacement	160 cm <sup>3</sup>
Rated power	2.8 kW / 2,800 min <sup>-1</sup>
Engine start	Pull
Tank volume (capacity)	1.0 l
DRIVE SYSTEM	
Drive	VarioSpeed
Selectable speeds	6 forward
Speed (max)	3.2–5.3 km/h
CUTTING SYSTEM	
Mowing area in m <sup>2</sup> h	750
Cutting deck (material)	Aluminium
Cutting width	46 cm / 18"
Cutting options	3-in-1
Cutting height adjustment	6 positions/central
Cutting height (min–max)	20–90 mm
Grass bag	Standard
Mulch Kit (Product code)	Standard
Side discharge	–
Rear discharge without collector	Standard
GRASS BAG	
Grass bag type	Soft bag with dustblocker
Grass bag capacity	65 l
Bag full indicator	Standard
WHEELS	
Wheels (F/R)	200 mm / 240 mm
Double ball bearings	Standard
COMFORT	
Washing nozzle	Standard
Handle type	Ergonomic
Foldable handle	Standard
Height adjustable handle	Standard
Handle covering	–
DIMENSIONS	
LpA/LwA/LwAg (dB)	84/94/96
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm
Net weight	46 kg
Model number	12AQYADQ603
EAN	 4 008423 882094

## XM2 DR46s

## XM2 ER53e

ENGINE		
Engine type	Honda GCV 160	Cub Cadet 65 OHV ES
Engine displacement	160 cm <sup>3</sup>	196 cm <sup>3</sup>
Rated power	2.8 kW / 2,800 min <sup>-1</sup>	3.3 kW / 2,550 min <sup>-1</sup>
Engine start	Pull starter	Electric
Tank volume (capacity)	1.1 l	1.1 l
DRIVE SYSTEM		
Drive	MySpeed EVO	VarioSpeed
Selectable speeds	1	6 forward
Speed (max)	2.8–3.9 km/h	3.2–5.3 km/h
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	750	950
Cutting deck (material)	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"
Cutting options	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min–max)	20–90 mm	20–90 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Standard	Standard
Side discharge	–	–
Rear discharge without collector	Standard	Standard
GRASS BAG		
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	75 l
Bag full indicator	Standard	Standard
WHEELS		
Wheels (F/R)	200 mm / 240 mm	200 mm / 240 mm
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	MySpeed EVO	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	–	–
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	86/96/98
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm	189 cm / 55 cm / 103 cm
Net weight	43 kg	48 kg
Model number	12ABYADQ603	12ARZA9A603
EAN	4 008423 882087	4 008423 882117



## XM3 ER53

## XM3 KR84es

ENGINE		
Engine type	Kawasaki FJ 180 V KAI	B&S 3105 Series
Engine displacement	179 cm <sup>3</sup>	344 cm <sup>3</sup>
Rated power	2.8 kW / 2,800 min <sup>-1</sup>	6.5 kW / 2,900 min <sup>-1</sup>
Engine start	Pull starter	Electric
Tank volume (capacity)	1.6 l	7.5 l
DRIVE SYSTEM		
Drive	Variable drive	Variable drive
Selectable speeds	Stepless	4 forward/1 reverse
Speed (max)	–	–
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	950	2,000
Cutting deck (material)	Aluminium	Steel
Cutting width	53 cm / 21"	84 cm / 33"
Cutting options	3-in-1	2-in-1
Cutting height adjustment	6 positions/central	8 positions/central
Cutting height (min–max)	20–90 mm	25–100 mm
Grass bag	Standard	–
Mulch Kit (Product code)	Standard	–
Side discharge	–	Standard
Rear discharge without collector	Standard	–
GRASS BAG		
Grass bag type	Soft bag with dustblocker	–
Grass bag capacity	80 l	–
Bag full indicator	Standard	–
WHEELS		
Wheels (F/R)	200 mm / 240 mm	200 mm / 400 mm (8"/16")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Standard
Foldable handle	Standard	Standard
Height adjustable handle	Standard	–
Handle covering	–	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	86/96/98	88/98/100
Vibration value hand/arm / K-factor	5 / 1.5 m/s <sup>2</sup>	5 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	189 cm / 55 cm / 94 cm	170 cm / 112 cm / 106 cm
Net weight	57 kg	154 kg
Model number	12AQZBK2603	12AE764U603
EAN	 4 008423 891966	 4 008423 835243





# COMPACT AND VERSATILE LIKE NEVER BEFORE

## MINI-RIDERS

The Cub Cadet Mini-Riders deliver the same strength, durability and perfect cut as our larger lawn tractors, just in a more compact design. Plus, you have the choice between two models with transmatic and three models with hydrostatic drive. The Cub Cadet Mini-Riders are more than just compact, they are comfortable, convenient and unmatched in quality.

## LR1 FORCE SERIES

### 200 LITRE GRASS BAG

A 200 litre grass bag bag (models LR1 MR76 and LR2 NR76) with dust protection cover, two grips and fill indicator, which can be emptied from the driver's seat.

### 4.9 LITRE FUEL TANK

The large fuel tank with fuel indicator gives you the freedom to mow your lawn in a full cycle with no refuelling needed.



### LARGE TYRES

Lawn-friendly, yet handy, even on uneven terrain.

### STEP-THROUGH FRAME

For easy access with soft rubber foot pads and a comfortable foot rest.

### CUTTING HEIGHT ADJUSTMENT & PTO CLUTCH

The cutting height can easily be adjusted through five positions from 38 mm to 95 mm and with the individual deck clutch lever the cutting deck can be switched on and off. Both levers are conveniently located on the right side of the seat.

## COMPACT AND VERSATILE LIKE NEVER BEFORE

Modern design, versatility and comfortable mowing – just three of the many reasons to choose a Cub Cadet LR1 Mini-Rider. The compact and manoeuvrable Mini-Riders with electric start are equipped with powerful and low-maintenance Cub Cadet engines.

Thanks to their space-saving design, these models are almost as compact as a conventional walk behind mower in terms of garage space.

The Mini-Riders also allow you to collect, discharge or mulch your grass clippings.

## KEY BENEFITS



### TRANSMATIC TRANSMISSION

The transmatic transmission allows shift-on-the-go speed control. Simply choose your driving direction, set the desired basic speed and start mowing.

On the Cub Cadet Mini-Rider LR1 models, select between six forward and six reverse speeds.



### 76 CM / 30" MOWING DECK

Selectable collecting, mulching and discharge options come as standard with model LR1 MR76. The LR1 MS76 model offers mulching and side discharge options.

Superior mulching, excellent collection and side discharge for spreading. Whatever you choose, our Mini-Riders can handle it.

## MODELS AVAILABLE

3-in-1

POWERED BY  
Cub Cadet



### LR1 MR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m <sup>2</sup> /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model no.:	13A726HD603

2-in-1

POWERED BY  
Cub Cadet



### LR1 MS76

Cutting width:	76 cm / 30"
Mowing area:	3,000 m <sup>2</sup> /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model no.:	13A726JD603

**Cub Cadet**<sup>®</sup>

**LR2**  
**FORCE SERIES**

## THE SIZE YOU NEED WITH THE POWER YOU WANT

The Cub Cadet Mini-Riders delivers all the strength, durability and cutting performance of larger rider models; but in a more compact design.

Premium hydrostatic transmission and the exclusive steering wheel system gives you optimum control while in operation.

## KEY BENEFITS



### INTELLIGENT PARKING ASSISTANCE (IPA)

IPA makes parking your LR2 in your garage or shed easier. The intelligent system halves the speed of your Mini-Rider, for reversing more safely and precisely.

### RevTEK™ TECHNOLOGY

RevTEK™ – Reverse Mowing Technology; is an ingenious system giving you the ability to mow in reverse when required (except the LR2 FR60).



### HYDROSTATIC DRIVE SYSTEM

The LR2 comes complete with a top-quality hydrostatic drive system. With the parking brake on the left and a one-pedal foot control on the right.



### SUPER GRIP PEDALS

Under challenging conditions, the super grip pedals provide maximum grip for safe driving.



### LIGHTS

LED lights for safer operation at dawn (except the LR2 FR60).



### TELESCOPIC STEERING COLUMN

With a soft grip steering wheel for maximum comfort, the steering shaft is height-adjustable to suit operators of any height (except the LR2 FR60).

## MINI-RIDER ACCESSORIES



### MULCH KIT/DEFLECTOR

Mulch Kit/Deflector incl. blades for 76 cm / 30" decks



Mod. no.: 196-334-600

Mulch Kit/Deflector incl. blades for 60 cm / 24" decks



Mod. no.: 196-707-678



### TWIN BAGGER

115 litres, for 76 cm / 30" decks



Mod. no.: 19A30014OEM

## MODELS AVAILABLE



### LR2 FR60

Cutting width:	60 cm / 24"
Mowing area:	1,500 m <sup>2</sup> /h
Grass bag capacity:	Standard 150 l
Engine:	Briggs & Stratton
Engine displacement:	224 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13AW21SC603



### LR2 NR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m <sup>2</sup> /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	420 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13B221HD603



### LR2 NS76

Cutting width:	76 cm / 30"
Mowing area:	3,000 m <sup>2</sup> /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	420 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13A221JD603

## LR1 MR76

## LR1 MS76



## LR2 FR60

ENGINE			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Briggs & Stratton
Engine displacement	382 cm <sup>3</sup>	382 cm <sup>3</sup>	223 cm <sup>3</sup>
Rated power	7.6 kW / 2,800 min <sup>-1</sup>	8.6 kW / 3,200 min <sup>-1</sup>	3.7 kW / 2,800 min <sup>-1</sup>
Cylinders	Single	Single	Single
Tank volume (capacity)	4.9 l	4.9 l	4.9 l
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter	–
DRIVE SYSTEM			
Transmission	Transmatic	Transmatic	Hydrostatic
Speeds	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> h	2,500	3,000	1,500
Cutting width	76 cm / 30"	76 cm / 30"	60 cm / 24"
Cutting height (min–max)	38–95 mm	38–95 mm	38–95 mm
Cutting options	3-in-1	2-in-1	3-in-1 Option
Number of blades	1	1	1
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard	–/Optional (196-707-678)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Standard 200 l/–	Optional 115 l/(19A30014OEM)	Standard 150 l/–
Bag lever/Hardtop	2 grips/plastic	–/–	1 grip/–
Bag fill indicator/grass deflector	Standard/Standard	–/Standard	–/Optional
FRAME			
Front axle	Steel	Steel	Steel
Front bumper	Standard	–	Standard
Turning radius	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame	Easy entry frame
WHEELS			
Battery	12V wet battery 115 CCA	12V wet battery 115 CCA	12V wet battery 115 CCA
Headlights	–	–	–
COMFORT			
Seat type	Comfort Seat	Comfort Seat	Deluxe High Comfort Seat
Seat adjustment	Screw	Screw	Screw
Steering wheel	Standard	Standard	Standard
Mow in reverse (RevTEK™)	–	–	–
Battery charger	(196-967-678)	(196-967-678)	–
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	86/96/98
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm	225 cm / 86 cm / 112 cm
Net weight	145 kg	127 kg	172 kg
Model number	13A726HD603	13A726JD603	13A521SC603
EAN	 4 008423 892284	 4 008423 892154	 4 008423 883374



## LR2 NR76

## LR2 NS76

ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet OHV
Engine displacement/ Output Watts (only LR2 ES76)	420 cm <sup>3</sup>	420 cm <sup>3</sup>
Rated power	8.0 kW / 2,800 min <sup>-1</sup>	8.2 kW / 3,000 min <sup>-1</sup>
Cylinders	Single	Single
Tank volume (capacity)	4.9 l	4.9 l
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter
DRIVE SYSTEM		
Transmission	Hydrostatic	Hydrostatic
Speeds	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> /h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm
Cutting options	3-in-1	2-in-1
Number of blades	1	1
Deck engagement	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	2 grips/plastic	-/-
Bag fill indicator/grass deflector	Standard/Standard	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	-
Turning radius	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
WHEELS		
Battery	12V wet battery 115 CCA	12V wet battery 115 CCA
Headlights	LED	LED
COMFORT		
Seat type	Deluxe High Comfort Seat	Deluxe High Comfort Seat
Seat adjustment	Screw	Screw
Steering wheel	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
Battery charger	(196-967-678)	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	88/98/100
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm
Net weight	172 kg	127 kg
Model number	13B221HD603	13A221JD603
EAN	 4 008423 875508	 4 008423 872385



A photograph of two yellow Cub Cadet lawn tractors parked on a grassy area with trees in the background. The sun is shining through the trees, creating a bright lens flare effect. The image is partially covered by a dark, semi-transparent triangular overlay on the right side.

**LT**

**FORCE SERIES**

**XT**

**ENDURO SERIES™**

# COMFORT AND EFFICIENCY PERFECTLY COMBINED

## LAWN TRACTORS

Cub Cadet lawn tractors deliver the perfect mowing experience, cut after cut, season after season.

Equipped with powerful engines and built on durable strong steel frames with hard-wearing components, Cub Cadet lawn tractors are made to work. Our line up of lawn tractors have been ergonomically designed for user comfort, honed to ensure incredibly responsive handling and made to deliver exceptional cut and collecting performance.

Power, strength, comfort and efficiency in every detail.

**Cub Cadet**<sup>®</sup>

**LT**  
FORCE SERIES



# LT LAWN TRACTORS, A STEP UP IN POWER AND PERFORMANCE.

With a lawn tractor from the FORCE SERIES, mowing lawns becomes an even more efficient and effective gardening experience. The decks on lawn tractors are typically six inches wider than those found on mini-riders and over 16" wider in comparison to a regular lawnmower. With a wider cutting deck and more powerful engines not only can you cut more, but you can mow at a speed which is 2 – 3 times faster, saving you time and effort.

Cub Cadet LT lawn tractors are extraordinarily versatile. They excel when it comes to covering large areas quickly thanks to the oversized grass bag. The side discharge eliminates the need to stop and empty the bag. Thanks to the user-friendly cutting height adjustment, the LT Series achieves optimum cutting results – even on difficult ground.

The LT lawn tractors deliver a perfect mowing performance, exceptional cutting and bagging with incredibly responsive handling.

## DRIVE SYSTEMS



### **TRANSMATIC TRANSMISSION**

Allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it all the way forward to stop. Releasing the brake pedal automatically brings the tractor back to your preset speed.



### **HYDROSTATIC TRANSMISSION**

Impressive with its modern technology and featuring a self-lubricating hydro pump for minimum maintenance and maximum durability. The hydrostatic transmission stands out for its velocity control as well as continual forward and reverse speeds. No clutching or shifting is required which means you can drive more gently with greater accuracy. The LT lawn tractors are controlled by either a hand lever (side discharge tractors) or a foot pedal (rear discharge tractors).

## KEY BENEFITS

### COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS

The high backrest supports an upright posture, making it far more comfortable.



### COMFORT STEERING WHEEL

A 3-spoke soft grip steering wheel is standard on all our tractors.



### CUTTING HEIGHT ADJUSTMENT


5-position height adjustment to easily change the cutting height (30–95 mm).

## KEY BENEFITS



### CENTRAL REAR DISCHARGE – DIRECT COLLECT®

Our rear discharge tractors are designed to transport grass clippings into the grass bag with optimal efficiency. All LT Series rear discharge models feature a grass bag made of durable fabric for flexibility and have an air passage to guarantee air flow and perfect collection. The hard top controls dust and reduces noise. The telescopic handle allows you to empty the grass bag from the driver's seat.

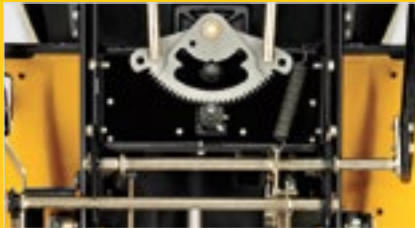

### PRECISE STEERING SYSTEM

All Cub Cadet lawn tractors help redefine your notion of comfort. We improved the steering of the lawn tractors. Our precision gear-steering technology supports operators at work and makes your powerful lawn tractor even more efficient and surprisingly easy to manoeuvre.



### STEEL FRAME

All tractor frames are made of fully welded and powder-coated rugged steel, for added durability.



### FLOATING STEEL OR CAST IRON FRONT AXLE

Keeping all four wheels on the ground, however uneven the surface.



### ONE-PIECE BONNET

The entire engine bonnet can be removed within seconds without the need for tools, allowing for easy maintenance.

## MODELS AVAILABLE

### UK SPECIAL EDITION

**2-in-1**  
POWERED BY  
**Cub Cadet**



### LT1 NR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m <sup>2</sup> /h
Grass bag capacity:	200 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13H276DC603

**3-in-1**  
OPTION

POWERED BY  
**Cub Cadet**



### LT1 NR92

Cutting width:	92 cm / 36"
Mowing area:	3,500 m <sup>2</sup> /h
Grass bag capacity:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13AB76DE603

**3-in-1**  
OPTION

POWERED BY  
**Cub Cadet**



### LT1 NS96

Cutting width:	96 cm / 38"
Mowing area:	4,000 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13AB76DF603

**Cub Cadet**<sup>®</sup>

**LT2**

**FORCE SERIES**

**LT3**

**FORCE SERIES**



**3-in-1**  
OPTION

POWERED BY  
**Cub Cadet**



**LT2 NR92**

Cutting width:	92 cm / 36"
Mowing area:	3,500 m <sup>2</sup> /h
Grass bag capacity:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13AB71DE603





Our LT lawn tractors are equipped with powerful and reliable Cub Cadet engines developed in the USA.

## KEY BENEFITS



### COMFORT STEERING WHEEL

A 3-spoke soft grip steering wheel is standard on all **LT2** and **LT3** tractors.

### RevTEK™ TECHNOLOGY

Reverse mowing technology. Allows you to cut while in reverse. Available on the **LT3 PR105** and **LT3 PS107**.

**COMFORT SEAT WITH HIGH BACKREST ON ALL LT MODELS** (excluding LT1 NR76).

**HYDROSTATIC TRANSMISSION** Ensures a smooth and exacting drive.



## MODELS AVAILABLE



**LT2 NS96**

Cutting width:	96 cm / 38"
Mowing area:	4,000 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13AB79DF603



**LT3 PR105**

Cutting width:	105 cm / 41"
Mowing area:	4,500 m <sup>2</sup> /h
Grass bag capacity:	240 l
Engine:	Cub Cadet 679cm <sup>3</sup> V-TWIN
Engine displacement:	679 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13HT71DN603



**LT3 PS107**

Cutting width:	107 cm / 42"
Mowing area:	5,500 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet 679cm <sup>3</sup> V-TWIN
Engine displacement:	679 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13HT79DG603

## LT1 NR76

## LT1 NR92

## LT1 NS96

ENGINE			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	420 cm <sup>3</sup>	439 cm <sup>3</sup>	439 cm <sup>3</sup>
Rated power	7.0 kW / 2,500 min <sup>-1</sup>	8.1 kW / 2,700 min <sup>-1</sup>	8.3 kW / 2,800 min <sup>-1</sup>
Cylinders	Single	Single	Single
Tank volume (capacity)	3.8 l	3.8 l	3.8 l
DRIVE SYSTEM			
Transmission	Transmatic 7 speed	Transmatic	Transmatic
Speeds	7 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Yes	-	-
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> h	2,500	3,500	4,000
Cutting width	76 cm / 30"	92 cm / 36"	96 cm / 38"
Cutting height (min-max)	30-95 mm	30-95 mm	30-95 mm
Number of blades	1	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Deck wheels	-	2	2
Wash nozzle/Mulch Kit	-/-	-(196-749A678)	-(OEM-190A116)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	200 l/-	240 l/-	Optional 200 l/(OEM-190-180A)
Bag lever/hardtop	-/-	Telescopic handle/Plastic	-/-
Bag fill indicator/grass deflector	-/Standard	-(196-750A678)	-/Standard
FRAME			
Front axle	Steel	Steel	Steel
Front bumper	(OEM-196B603)	(OEM-196B603)	(OEM-196B603)
Turning radius	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 18 x 6.5	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Standard	Easy entry frame	Easy entry frame
Headlights	Standard	Standard	Standard
COMFORT			
Seat type	Medium back	High back	High back
Seat adjustment	Screw	Tool-less	Tool-less
Steering wheel	Comfort	Standard	Standard
Toolbox/Cupholder	-/-	-/-	-/-
12 V plug	-/-	-	-
Mow in reverse (RevTEK™)	Standard	-	-
Battery charger	(196-967-678)	(196-967-678)	(196-967-678)
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	225 cm / 91 cm / 103 cm	225 cm / 99 cm / 103 cm	170 cm / 107 cm / 100 cm
Net weight	150 kg	195 kg	150 kg
Model number	13H276DC603	13AB76DE603	13AB76DF603
EAN	4 008423 861990 >	4 008423 891829	4 008423 891836

## LT2 NR92

## LT2 NS96

## LT3 PR105

## LT3 PS107

Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
439 cm <sup>3</sup>	439 cm <sup>3</sup>	679 cm <sup>3</sup>	679 cm <sup>3</sup>
8.1 kW / 2,700 min <sup>-1</sup>	8.3 kW / 2,800 min <sup>-1</sup>	12.7 kW / 2,700 min <sup>-1</sup>	13.1 kW / 2,800 min <sup>-1</sup>
Single	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
3.8 l	3.8 l	3.8 l	3.8 l

Foot-hydrostatic	Hand-hydrostatic	Hydrostatic	Hand-hydrostatic
Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Foot pedal control	Manual lever control	Foot pedal control	Manual lever control
-	-	-	-

3,500	4,000	4,500	5,500
92 cm / 36"	96 cm / 38"	105 cm / 41"	107 cm / 42"
30-95 mm	30-95 mm	30-95 mm	30-95 mm
2	2	2	2
Manual lever control	Manual lever control	Manual lever control	Manual lever control
5 positions	5 positions	5 positions	5 positions
2	2	2	2
-(196-749A678)	-(OEM-190A116)	Standard/(196-749A678)	Standard/Standard

240 l/-	Optional 200 l/(OEM-190-180A)	240 l/-	Optional 200 l/(OEM-190-180A)
Telescopic handle/Plastic	-/-	Telescopic handle/Plastic	-/-
-(196-750A678)	-/Standard	-(196-750A678)	-/Standard

Steel	Steel	Heavy-duty cast-iron	Heavy-duty cast-iron
(OEM-196B603)	(OEM-196B603)	Standard	Standard
46 cm / 18"	46 cm / 18"	46 cm / 18"	46 cm / 18"
15 x 6 / 18 x 9.5	15 x 6 / 20 x 8	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8
Sleeve bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Easy entry frame	Easy entry frame	Easy entry frame
Standard	Standard	Standard	Standard

High back	High back	High back	High back
Tool-less	Tool-less	Tool-less	Tool-less
Soft-Grip	Soft-Grip	Soft-Grip	Soft-Grip
-/-	-/-	-/-	-/-
-	-	-	-
-	-	Standard	Standard
(196-967-678)	(196-967-678)	(196-967-678)	(196-967-678)

88/98/100	88/98/100	88/98/100	88/98/100
1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
225 cm / 99 cm / 103 cm	170 cm / 107 cm / 100 cm	225 cm / 110 cm / 103 cm	170 cm / 115 cm / 100 cm
196 kg	150 kg	198 kg	175 kg
13AB71DE603	13AB79DF603	13AJ71DN603	13AJ79DG603



4 008423 891812



4 008423 891843



4 008423 899863



4 008423 899870

**Cub Cadet**<sup>®</sup>

**XT**  
**ENDURO SERIES**<sup>™</sup>

**STRONG,  
POWERFUL  
AND AGILE.**

Powerful performance, agility and market leading innovations make the XT ENDURO SERIES the best lawn tractors Cub Cadet has ever built.

Designed for the expert gardener the XT ENDURO SERIES boasts the tightest turning circle on the market, especially useful if your lawn has obstacles such as trees and shaped beds.

The power and performance of the XT ENDURO SERIES will allow you to finish your work faster and with better results - meeting and exceeding your high expectations.

# OUR TOP 5 MARKET LEADING FEATURES

# 1.

## MARKET LEADING CUTTING, COLLECTING AND MULCHING 3-IN-1 SYSTEM

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.



## THE SMALLEST TURNING CIRCLE ON THE MARKET

Unbeatable efficiency even in confined spaces thanks to our innovative TIGHT TURN XTREME technology available on all XT2 and XT3 models.

# 2.

# 3.

## ULTRA-STURDY, CORROSION-RESISTANT FRAME

Ultra-rigid frame for top durability.



## PERFECTLY MATCHED TRANSMISSION AND ENGINE POWER

Optimal drive system and the most powerful engine in its class.

# 4.

# 5.

## ULTRA-RELIABLE V-BELT DESIGN

Improved V-belt design reduces belt tension ensuring longer belt life and impressive stability. The XT2 PS117i and XT3 QS137 tractors are also equipped with a welded fabricated mowing deck.



# DESIGNED FOR FUEL – EFFICIENCY AND RELIABLE PERFORMANCE

## THE CUB CADET EFI ENGINE –

PERFECT FOR LAWN TRACTORS



Cub Cadet was the first manufacturer to introduce an engine with electronically controlled direct fuel injection that was designed specifically for lawn tractors, with characteristics that measure up to the task.

THE FOLLOWING XT MODELS FEATURE THE CUB CADET  
EFI ENGINE: XT2 PR106ie, XT2 PS117i

### A WHOLE HOST OF BENEFITS

- Lower fuel costs (uses up to 25% less than carburetor engines that deliver comparable performance) saving you both time and money when you refuel.
- Large engine displacement for miles of mowing power: 679 cm<sup>3</sup>.
- Engine no longer requires a manual choke. Simply take a seat, push the start button and get mowing.
- Improved driving characteristics (cold running performance, power consumption, no afterburning or continued running).
- Less servicing required thanks to direct fuel injection. No carburetor to drain, so you save on maintenance.
- Eco-friendly due to reduced emissions.
- Simple troubleshooting and diagnostic system for direct fuel injection lets dealers service models faster.



**Cub Cadet®**  
ENGINES

**DECADES OF ENGINE DEVELOPMENT EXPERTISE**

MORE THAN **10 MILLION**  
**CUB CADET** ENGINES  
 IN USE **WORLDWIDE**



**STRONG RESULTS  
 HIGH EFFICIENCY  
 SOLID CONSTRUCTION**

Cub Cadet has been designing and manufacturing its own engines for decades, with more than ten million units delivered worldwide. Specifically designed for our products, Cub Cadet engines deliver perfect results every time. Because of its global expertise and competitive products, Cub Cadet became the fastest-growing riding mower brand in the U.S..

**3**

# MORE GREAT FEATURES THAT MAKE YOUR MOWING EASIER

**LAWN TRACTORS**

**GRASS BAG WITH ELECTRONIC EMPTYING**

At the touch of a button, the grass bag lifts up and tips the cuttings out, even when the bag is full. (Fitted on XT2 PR106ie & XT3 QR106e).



**ADJUSTABLE SEAT**

The seat can be adjusted to suit you and provide pure comfort whilst you mow.




**POWERFUL KAWASAKI V-TWIN ENGINE**

A two-cylinder engine for challenging terrain. Ultra-smooth running with low fuel consumption.

**XT MODELS WITH KAWASAKI V-TWIN ENGINES:**

XT2 PR95, XT2 QR106, XT2 PS107, XT2 PS117, XT3 QR106e, XT3 QS127, XT3 QS137



**USB SOCKET**

You can charge your phone while mowing using the multifunction socket on the XT2 and XT3 models.



**MEMORY CURSOR**

A cutting height memory cursor which displays your most frequently used and/or favorite cutting heights.





## WHICH XT ENDURO TO CHOOSE?

**XT1™**  
ENDURO SERIES™

**XT2™**  
ENDURO SERIES™

**XT3™**  
ENDURO SERIES™



**MARKET LEADING CUTTING, COLLECTING AND MULCHING SYSTEM**

- All-new grass collecting system and rear-discharge mowing decks.
- With twice the grass-catching of previous Cub Cadet lawn tractors.
- Best direct collect rear discharge on the market.
- Push-button switch-on.

320 LITRE BAG CAPACITY

360 LITRE BAG CAPACITY

**HYDROSTATIC V-BELT**

**HYDROSTATIC POWER TRANSMISSION**

Smooth drive system – simply put your foot on the pedal and go




**POWERFUL CUB CADET ENGINE**  
reliable and high performance engine  
(XT1 OS96, XT1 OS107, XT1 OR95, XT1 OR106)

**EFFICIENT CUB CADET EFI V-TWIN ENGINE**  
2-cylinder engine  
(XT2 PR106ie, XT2 PS117i)

**KAWASAKI V-TWIN ENGINE**  
(XT2 PR95, XT2 QR106, XT2 PS107, XT2 PS117)

**KAWASAKI V-TWIN ENGINE**  
2-cylinder engine for difficult terrain, ultra-smooth running and low fuel consumption.  
(XT3 QR106e, XT3 QS127, XT3 QS137)

**EASIEST STEERING SYSTEM ON THE MARKET**

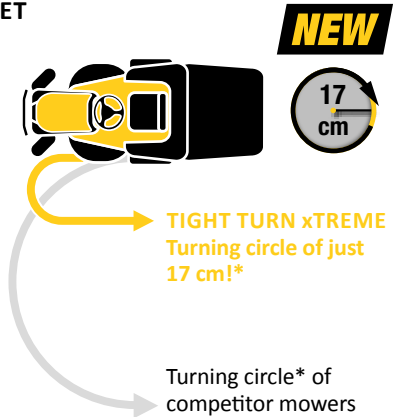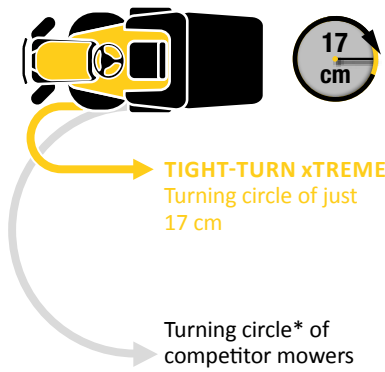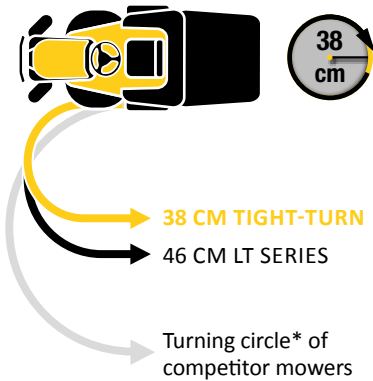

**ELECTRIC GRASS BAG LIFTER** for XT2 PR106ie & XT3 QR106e

KEY START

PUSH BUTTON START

**SOLID, WELDED MOWING DECK** for XT2 PS117i & XT3 QS137

**12V MULTI-FUNCTION CHARGING SOCKET; CHARGE BATTERIES AND MOBILE DEVICES WHILE YOU DRIVE**

**ANTI-DUST GRASS BAG SYSTEM**  
AVAILABLE AS AN OPTIONAL EXTRA

**ANTI-DUST SYSTEM**  
Rear discharge with multi-layer dust apron included in accessories. The apron protects against flying grass and dirt.

**ALL-GROUND TRACTION SYSTEM**  
Perfect traction even on heavy ground – thanks to mechanical differential lock.

\*The turning circle of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning circle – included in all product specifications.

# Cub Cadet®

# XT1™

ENDURO SERIES™

For more information and videos.



POWERED BY  
Cub Cadet



## XT1 OS96

<b>Cutting width:</b>	96 cm / 38"
<b>Mowing area:</b>	6,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 200 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions
<b>Model no.:</b>	13A8A1CF603

## UNBELIEVABLE POWER & EFFICIENCY

The Cub Cadet XT1 lawn tractors are ideally equipped for mowing, collecting and transporting clippings and can be expanded with a range of accessories.

## KEY BENEFITS




**ADJUSTABLE SEAT**  
Individually adaptable – pure comfort for all users.



**PUSH BUTTON BLADE START**  
Activate the cutting blades safely and more efficiently.



**MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT**  
Quickly and easily select the perfect setting.



**HYDROSTATIC DRIVE SYSTEM**  
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

## MODELS AVAILABLE



POWERED BY  
**Cub Cadet**

### XT1 OS107

<b>Cutting width:</b>	107 cm / 42"
<b>Mowing area:</b>	8,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 200 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions
<b>Model no.:</b>	13B8A1CS603



POWERED BY  
**Cub Cadet**

### XT1 OR95

<b>Cutting width:</b>	95 cm / 38"
<b>Mowing area:</b>	5,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	320 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions
<b>Model no.:</b>	13C8A1CB603



POWERED BY  
**Cub Cadet**

### XT1 OR106

<b>Cutting width:</b>	106 cm / 42"
<b>Mowing area:</b>	7,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	320 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions
<b>Model no.:</b>	13C8A1CR603

**Cub Cadet**<sup>®</sup>

**XT2**<sup>™</sup>  
**ENDURO SERIES**<sup>™</sup>



## POWER FOR GREATER CHALLENGES

The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. Tight Turn Xtreme makes them ideal for working on tough terrain, transporting and using additional accessories, whatever the season. At just 17 cm turning circle the XT2 series have the tightest turning radius on the market. Innovative tight turn technology delivers unsurpassed capability in tight places.

For more  
information  
and videos.



## KEY BENEFITS



**ADJUSTABLE SEAT**  
Individually adaptable – pure comfort for all users.



**MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT**  
Quickly and easily select the perfect setting.



**PUSH BUTTON BLADE START**  
Activate the cutting blades safely and more efficiently.



**HYDROSTATIC DRIVE SYSTEM**  
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

## MODELS AVAILABLE



**XT2 PR95**

Cutting width:	95 cm / 38"
Mowing area:	6,000 m <sup>2</sup> /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BGA1CB603



**XT2 QR106**

Cutting width:	106 cm / 42"
Mowing area:	8,000 m <sup>2</sup> /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BFA1CR603



**XT2 PR106ie**

Cutting width:	106 cm / 42"
Mowing area:	8,000 m <sup>2</sup> /h
Grass bag capacity:	320 l, electric bag lift
Engine:	EFI Cub Cadet, V-TWIN dual cylinder
Engine displacement:	679 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BZA1CR603



**XT2 PS107**

Cutting width:	107 cm / 42"
Mowing area:	8,500 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13AGA1CS603



**XT2 PS117**

Cutting width:	117 cm / 46"
Mowing area:	9,000 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13AGA1CT603



**XT2 PS117i**

Cutting width:	117 cm / 46", welded mowing deck
Mowing area:	9,000 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	EFI Cub Cadet, V-TWIN dual cylinder
Engine displacement:	679 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BZA1CN603

# Cub Cadet®

# XT3™

ENDURO SERIES™

For more information and videos.



Powered by  
**Kawasaki**



## XT3 QR95

<b>Cutting width:</b>	95 cm / 38"
<b>Mowing area:</b>	6,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	360 l, Anti-Dust-System
<b>Engine:</b>	Kawasaki, V-TWIN dual cylinder
<b>Engine displacement:</b>	726 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic, All-Ground Traction System
<b>Cutting height adjustment:</b>	12 positions
<b>Model no.:</b>	13DFA5CB603

## MAXIMUM STRENGTH AND POWER FOR THE TOUGHEST TASKS

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 ENDURO SERIES are the ultimate lawn tractors. Brimming with power, capable of mowing dense grass and transporting larger loads including a mechanical differential lock that provides optimum traction however tough the terrain.

**NEW**


*Cub Cadet*

# TIGHT TURN xTREME

Just 17 cm turning radius thanks to TIGHT TURN xTREME.



## KEY BENEFITS



### GRASS BAG WITH ELECTRIC BAG LIFT

At the touch of a button, the grass bag of the XT3 QR106e lifts up and tips the cuttings out.



### STRONG V-TWIN KAWASAKI ENGINE

Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.



### LARGE GRASS BAG

Vast 360 litre capacity ensures maximum efficiency.



### ANTI-DUST SYSTEM

Rear discharge with multi-layer dust apron included in the equipment protects against swirling grass and dirt.



### WELDED MOWING DECK

For high durability and robustness on the XT3 QS137.

*Cub Cadet*

## ALL-GROUND TRACTION

Optimum traction, however tough the terrain – thanks to the mechanical differential lock.

## MODELS AVAILABLE



### XT3 QR106e

Cutting width:	106 cm / 42"
Mowing area:	8,000 m <sup>2</sup> /h
Grass bag capacity:	360 l, electric bag lift and Anti-Dust-System
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Hydrostatic, All-Ground Traction System
Cutting height adjustment:	12 positions
Model no.:	13DIA5CR603



### XT3 QS127

Cutting width:	127 cm / 50"
Mowing area:	10,000 m <sup>2</sup> /h
Grass bag capacity:	Optional 210 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Hydrostatic, All-Ground Traction System
Cutting height adjustment:	12 positions
Model no.:	14CIA5CQ603



### XT3 QS137

Cutting width:	137 cm / 54" welded mowing deck
Mowing area:	11,000 m <sup>2</sup> /h
Grass bag capacity:	Optional 210 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Hydrostatic, All-Ground Traction System
Cutting height adjustment:	12 positions
Model no.:	14CIA5CA603

## XT1 OS96

## XT1 OS107

## XT1 OR95

ENGINE			
Engine type	Cub Cadet	Cub Cadet	Cub Cadet
Engine displacement	547 cm <sup>3</sup>	547 cm <sup>3</sup>	547 cm <sup>3</sup>
Rated power	9.0 kW / 2,300 min <sup>-1</sup>	9.0 kW / 2,300 min <sup>-1</sup>	6.2 kW / 2,100 min <sup>-1</sup>
Cylinders	Single	Single	Single
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> h	6,000	8,000	5,500
Cutting width	96 cm / 38"	107 cm / 42"	95 cm / 38"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	–/Standard/ Standard	Standard/Standard/ Standard	Standard/(196-551-000)/ (196-561-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Optional 200 l/(OEMR190-180A)	Optional 200 l/(19A30030100)	320 l/ (196-555-603 Anti-Dust-System)
Bag lever/hardtop	–/–	–/–	Rounded ergo telescopic handle/ Plastic
Bag fill indicator/grass deflector	–/Standard	–/Standard	Deluxe w Blade Shutoff/ (196-552-A000)
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Single Tube	Single Tube
Turning radius	TIGHT TURN 38 cm	TIGHT TURN 38 cm	TIGHT TURN 38 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 20 x 8	15 x 6 Turf Saver / 20 x 8	15 x 6 Turf Saver / 18 x 8.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	–	–	–
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	175 cm / 124 cm / 110 cm	175 cm / 134 cm / 110 cm	245 cm / 100 cm / 118 cm
Net weight	195 kg	195 kg	235 kg
Model number	13A8A1CF603	13B8A1CS603	13C8A1CB603
EAN	4 008423 872224	4 008423 872248	4 008423 872217



## XT1 OR106

## XT2 PR95

## XT2 QR106

ENGINE			
Engine type	Cub Cadet	Kawasaki	Kawasaki
Engine displacement	547 cm <sup>3</sup>	603 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	6.6 kW / 2,250 min <sup>-1</sup>	9.3 kW / 2,150 min <sup>-1</sup>	11.6 kW / 2,200 min <sup>-1</sup>
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> /h	7,500	6,000 m	8,000
Cutting width	106 cm / 42"	95 cm / 38"	106 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	Standard/(196-550-000)/ (196-560-000)	Standard/(196-551-000)/ (196-561-000)	Standard/(196-550-000)/ (196-560-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	320 l/ (196-555-603 Anti-Dust-System)	320 l/ (196-555-603 Anti-Dust-System)	320 l/ (196-555-603 Anti-Dust-System)
Bag lever/hardtop	Rounded ergo telescopic handle/ Plastic	Rounded ergo telescopic handle/ Plastic	Rounded ergo telescopic handle/ Plastic
Bag fill indicator/grass deflector	Deluxe w Blade Shutoff/ (196-552-A000)	Deluxe w Blade Shutoff/ (196-552-A000)	Deluxe w Blade Shutoff/ (196-552-A000)
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Loop	Loop
Turning radius	TIGHT TURN 38 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 18 x 8.5	15 x 6 Turf Saver / 18 x 8.5	15 x 6 Turf Saver / 18 x 8.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	–	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	245 cm / 110 cm / 118 cm	250 cm / 100 cm / 118 cm	250 cm / 110 cm / 118 cm
Net weight	258 kg	254 kg	253 kg
Model number	13C8A1CR603	13CGA1CB603	13CFA1CR603
EAN	 4 008423 872231	 4 008423 872279	 4 008423 872262

## XT2 PR106ie



## XT2 PS107

## XT2 PS117

ENGINE			
Engine type	Cub Cadet OHV EFI	Kawasaki	Kawasaki
Engine displacement	679 cm <sup>3</sup>	603 cm <sup>3</sup>	603 cm <sup>3</sup>
Rated power	9.9 kW / 2,150 min <sup>-1</sup>	10.4 kW / 2,400 min <sup>-1</sup>	11.8 kW / 2,750 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	9.5 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> h	8,000	8,500	9,000
Cutting width	106 cm / 42"	107 cm / 42"	117 cm / 46"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/(196-550-000)/ (196-560-000)	Standard/Standard/ Standard	Standard/Standard/ Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	320 l, electric bag lift/ (Anti-Dust-System 196-553-603)	Optional 200 l/(19A30030100)	Optional 200 l/(19A30030100)
Bag lever/hardtop	Electric/Plastic	-/-	-/-
Bag fill indicator/grass deflector	Deluxe w Blade Shutoff/ (196-552-A000)	-/Standard	-/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Loop	Loop	Loop
Turning radius	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 18 x 8.5	15 x 6 Turf Saver / 20 x 8	15 x 6 Turf Saver / 20 x 8.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	250 cm / 110 cm / 118 cm	180 cm / 134 cm / 100 cm	180 cm / 146 cm / 110 cm
Net weight	253 kg	210 kg	215 kg
Model number	13BZA1CR603	13BGA1CS603	13AGA1CT603
EAN	4 008423 881899	4 008423 872286	4 008423 872293

## XT2 PS117i

## XT3 QR95

ENGINE		
Engine type	Cub Cadet OHV EFI	Kawasaki
Engine displacement/ Output Watts (only XT2 ES107)	679 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	12.6 kW / 2,600 min <sup>-1</sup>	13.4 kW / 2,100 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	9.5 l	11.4 l
DRIVE SYSTEM		
Transmission	Hydrostatic	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m2h	9,000	6,000
Cutting width	117 cm / 46"	95 cm / 38"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting deck	Welded mowing deck	Stamped
Number of blades	2	2
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/Standard/ Standard	Standard/(196-551-000)/ (196-561-000)
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Optional 200 l/(19A30030100)	360 l, Anti-Dust-System/–
Bag lever/hardtop	–/–	Rounded ergo telescopic handle/Plastic
Bag fill indicator/grass deflector	–/Standard	Deluxe w Blade Shutoff/(196-552-A000)
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Loop	Bull Bar
Turning radius	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 20 x 8.5	15 x 6 Turf Saver / 8 x 8.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC		
Headlights	LED	LED
COMFORT		
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	88/98/100
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	180 cm / 144 cm / 110 cm	267 cm / 100 cm / 118 cm
Net weight	230 kg	247 kg
Model number	13BZA1CN603	13DFA5CB603
EAN	 4 008423 881943	 4 008423 872828

## XT3 QR106e

## XT3 QS127

## XT3 QS137

ENGINE			
Engine type	Kawasaki	Kawasaki	Kawasaki
Engine displacement	726 cm <sup>3</sup>	726 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	12.4 kW / 2,200 min <sup>-1</sup>	15.7 kW / 2,800 min <sup>-1</sup>	16.2 kW / 3,000 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m <sup>2</sup> h	8,000	10,000	11,000
Cutting width	106 cm / 42"	127 cm / 50"	137 cm / 54"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Welded mowing deck
Number of blades	2	3	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/(196-550-000)/ (196-560-A000)	Standard/Standard/ Standard	Standard/Standard/ Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	360 l, electric bag lift and Anti-Dust-System/–	Optional 210 l/(19A30018100)	Optional 210 l/(19A30018100)
Bag lever/hardtop	–/Plastic	–/–	–/–
Bag fill indicator/grass deflector	Deluxe w Blade Shutoff/ (196-552-A000)	–/Standard	–/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Bull Bar	Bull Bar	Bull Bar
Turning radius	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 18 x 8.5	16 x 6.5-8 Turf Saver / 22 x 9.5	16 x 6.5-8 Turf Saver / 22 x 9.5
Wheel bearings	Sleeve bearings	Ball bearings	Ball bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet/Armrests	High Back Seat Cub Cadet/Armrests	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	93/103/105	93/103/105
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	267 cm / 110 cm / 118 cm	197 cm / 155 cm / 110 cm	197 cm / 167 cm / 110 cm
Net weight	268 kg	260 kg	270 kg
Model number	13DIA5CR603	14CIA5CQ603	14CIA5CA603
EAN	4 008423 881950	4 008423 872545	4 008423 872323



# THE MOST COMPREHENSIVE RANGE OF ACCESSORIES

The extensive range of Cub Cadet accessories will help to meet all your gardening requirements and means you can use your lawn tractor all year round.



## STEEL CARGO CARRYING PLATFORM FOR XT SERIES SIDE DISCHARGER

- Foldable vertically and lockable in place
- Easy to install thanks to the FastAttach™ System
- Max. weight: 36 kg
- Suitable for XT Series side-dischargers

0 043033 577132  
Mod. no.: 19A30029100



## ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGER

- Easy to install thanks to the FastAttach™ System
- Can be switched on/off from the driver's seat
- Capacity: 45 kg
- Suitable for XT Series side-dischargers

4 008423 875775  
Mod. no.: 19A30028100

## MULCH KITS

Mulch Kit (without blades) for model LT1 NS96 and LT2 NS96

4 008423 819632  
Mod. no.: OEM-190A116

Mulch Kit (without blades) for models LT1 NR92, LT2 NR92 and LT3 PR105

4 008423 836080  
Mod. no.: 196-749A678

Mulch Kit (without blade) for models XT1 OR106, XT2 QR106, XT2 PR106ie and XT3 QR106, mulching plug optional available (196-560-000)

4 008423 875652  
Mod. no.: 196-550-000

Mulch Kit (without blade) for models XT1 OR95, XT2 PR95 and XT3 QR95, mulching plug optional available (196-561-000)

4 008423 875669  
Mod. no.: 196-551-000

## AGRICULTURAL TYRES

Chevron style rear wheels 18" x 9,5". Set consists of 2 cpl. wheels. Fits all tractors with either 18" or 20" rear wheels. Not approved for XT3 models.

4 008423 816891  
Mod. no.: 196-721A678

## GRASS BAGS

Anti-Dust-System for 360 l grass collection system, XT3 Series

4 008423 874976  
Mod. no.: 196-553-603

Anti-Dust-System for 320 l grass collection system, XT1 and XT2 Series

4 008423 875089  
Mod. no.: 196-555-603

Twin bagger, 200 l, for 96 cm / 107 cm decks of LT Series

4 008423 815849  
Mod. no.: OEM-190-180A

Twin bagger, 200 l, for 96 cm decks of XT Series

4 008423 883350  
Mod. no.: OEMR190-180A

Twin bagger for 200 l, for 107 / 117 cm, with variable tube, inspection window and FastAttach™ System, for decks of XT Series

4 008423 879636  
Mod. no.: 19A30030100

Triple bagger 210 l, for 127 / 137 cm decks of XT Series

0 037049 957286  
Mod. no.: 19A30018100

## ADDITIONAL XT ACCESSORIES

Armrests for XT Series

4 008423 876055  
Mod. no.: 196-564-603

Battery charger for LR, LT and XT Series

4 008423 835694  
Mod. no.: 196-967-678

Electrical grass catcher emptying mechanism for XT Series rear discharger system. Suitable for 2018+ models.

4 008423 882025  
Mod. no.: 196-570-600

	<b>FRONT BUMPER</b>	
	Front bumper Kit with FastAttach™ fits all LT Series lawn tractors	4 008423 809046 Mod. no.: OEM-196B603
	Front Bumper Single, XT Series	4 008423 876086 Mod. no.: 196-562-000
	Front Bumper Loop, XT Series	4 008423 876093 Mod. no.: 196-563-000
	Front Bumper Bull Bar, XT Series	4 056494 171210 Mod. no.: 196-564-000
	<b>DEFLECTORS</b>	
	Rear deflector for all XT Series rear-discharger models	4 008423 875676 Mod. no.: 196-552-A000
	Rear deflector for LT Series rear-discharger models	4 008423 836097 Mod. no.: 196-750A678
	<b>LAWN TRACTOR COVER L/XL</b>	
	Size L: for small- and medium-sized lawn tractors	4 008423 806441 Mod. no.: 2024-U1-0003
	Size XL: for large-sized and rear discharge lawn tractors (B)	4 008423 823882 Mod. no.: 2024-U1-0004
	<b>SNOW CHAINS</b>	
	For 20" x 8.0" wheels incl. Adapter	4 008423 824797 Mod. no.: 196-658-699
	For 18" x 9.5" wheels incl. Adapter	4 008423 813678 Mod. no.: 196-898-699
	For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels	0 037049 945597 Mod. no.: 490-241-0025
	<b>DOZER BLADE AND RUBBER LIP</b>	
	117 cm dozer blade for LT Series	4 008423 807684 Mod. no.: OEM-190-833
	Rubber lip – universal – for all dozer blades	4 008423 815368 Mod. no.: 196-718-678
	117 cm dozer blade for LT und XT Series	0 037049 957309 Mod. no.: 19A30017OEM







# POWERFUL PERFORMANCE FOR FASTER MOWING

With our XR ENDURO SERIES™ Cub Cadet presents Robotic Mowers that raise the bar for automated lawn mowing.

You can choose from a total of five models: the new 500 for small areas, the two XR2 models for areas up to 2,000 m<sup>2</sup> and the two top-of-the-range XR3 models for areas up to 5,000 m<sup>2</sup>. All of which meet a wealth of power and performance needs.

Thanks to their stronger mowing systems compared to similar models, the XR mowing robots mow up to 10 % faster, so you can spend more leisure time in your garden.

Whichever XR robotic mower you choose, the same end result is guaranteed: a perfectly trimmed lawn in next to no time. All of which meet a wealth of power and performance needs.

## PLENTY OF OUTSTANDING FEATURES

The XR ENDURO SERIES™ robotic mowers include a huge range of features that help deliver ultra-efficient performance. As well as making mowing more convenient, they also create a uniquely precise and fast cut.



### BEST-IN-CLASS

Outperforms other models with a durable and powerful mowing system. Mows up to 10% faster all-round.



### STATE-OF-THE-ART TECHNOLOGY

Performance and features to meet professional needs, such as a GSM module, SmartApp 2.0, brushless DC motors and multi-zone mowing.



### POWER WHEELS AND CUTTING WIDTH

Extra-wide high-grip wheels for exacting requirements. Mows lawns measuring 500–5,000 m<sup>2</sup> efficiently.



### MULTI-ZONE CAPABILITY:


Sub-zones connected to the main zone can be mowed consecutively. For separate zones that are not connected to the main area, a RoboZone or a second station is required.



### ULTRA-ROBUST HOUSING


Designed to meet the toughest demands.

## XR ENDURO SERIES™



### PIN CODE SECURITY

By entering your own unique PIN you can ensure that no one else uses your XR robotic mower.



### INTEGRATED RAIN SENSOR

If it rains the XR robotic mower automatically returns to its base and only starts cutting again once the weather improves.



### SMART MODE

Instead of just stopping and turning, shortly before it reaches the perimeter wire, the XR robotic mower turns in a continuously smooth arc, saving time.



### PERFECT RIGHT TO THE LAWN EDGE

Seamless agility and unique edge mode for mowing over the wheelbase – for perfect lawn edges.



### POWERFUL MOTORS

High-performance motors cut lawns quickly and efficiently. The brushless motors (not included in the XR1 500 and XR2 1000) run almost silently and require minimal maintenance.



### SMART APP 2.0

Communicate with the robotic mower via your smart phone and control all its functions.



### ALEXA-COMPATIBLE

All Cub Cadet robotic lawnmowers can be controlled with your voice via the Amazon Alexa voice service. You can activate this as a skill in Alexa.



## XR

ENDURO SERIES™


# THE FUTURE OF MOWING TODAY

Cub Cadet has included a whole range of up to the minute digital features that make it even easier to control the various functions of your XR robotic mower. Our Smart App 2.0 gives you the control to programme your robotic mower using your smart phone. The MyXR portal provides mower usage and change schedules if required for example it can still cut when you are away on holiday. Cub Cadet is one of the first robotic mower manufacturers to have Alexa available to allow you to control your mower with your voice at any time and from anywhere in the world.

### ROBOZONE & ROBOZONE MOBILE

Exclusive to Cub Cadet the RoboZone signal transmitter can easily activate separate zones without a second charging station. It is available as an accessory with a power cord or a battery option if there is no power.

This feature means that the robotic mower can also be used in another garden or in difficult and hard-to-reach areas where there is no mains power.

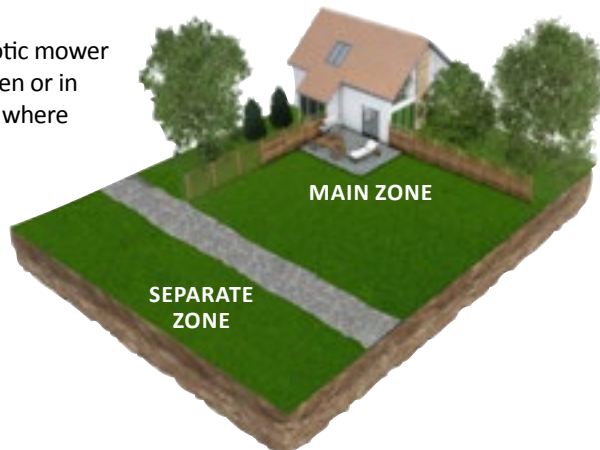



### ROBOCONNECT GSM

This 2-way module allows the robot to communicate remotely. It connects the robotic mower with the SMART APP 2.0 as well as the web portal MyXR.



### ALEXA-COMPATIBLE

All Cub Cadet robotic lawnmowers can be controlled with your voice via the Amazon Alexa voice service. You can activate this as a skill in Alexa.



### MyXR

The MyXR portal informs you about mower use, issues reports, and gives you access to mowing schedules which you can change as required.



### ROBOCONNECT+ GPS

Unlike the standard RoboConnect GSM module, a message is sent to your smartphone when the mower leaves a defined radius around your garden. MyXR also allows you to view the location of your XR robotic lawnmower at any time (Included with the XR2 2000 and XR3 5000 models).



### SMART APP 2.0

This app lets you control one or several XR robotic mowers simultaneously. You can change settings and mowing schedules remotely and access mowing reports.

\*Within Bluetooth® range



## COMPLETE CONTROL VIA SMARTPHONE

The App 2.0 allows the robotic mowers in the XR ENDURO SERIES to be controlled and programmed securely and conveniently using your smartphone. Simply download the app, install it on your phone and get mowing.



**REMOTE CONTROL**  
XR mowers can be manually controlled, even beyond the perimeter wire.



**UPDATES\***

- Mowing progress
- Battery charge
- Mowing times



**PROGRAM SETTINGS**

- Mowing
- To charging station
- Deactivate automatic start
- Set mowing times



**CUSTOMER SERVICES**

- Immediate assistance
- Online diagnostics
- Online troubleshooting

# THE RIGHT MOWER FOR ANY LAWN

No two gardens are alike. There could be one main lawn or several smaller turfs, or there might be additional zones away from the main area that need mowing. The Cub Cadet XR ENDURO SERIES models can handle all such lawns with ease. Thanks to the RoboZone sensor, you can mow separate zones without the need for a second base station. For more information, turn to page 83.



Example:  
main zone only



Example:  
main zone and  
sub zone



Example:  
main zone and  
separate zone



Example:  
main zone, sub zone  
and separate zone

## EASY TO INSTALL AND PROGRAM

To ensure your XR robotic mower is installed and programmed properly, we offer a professional installation service via your Cub Cadet dealer. You can also set up the device yourself (an installation kit can be purchased separately).



### STEP 1: DEFINE YOUR DESIRED MOWING ZONE

To do this, you need to install the perimeter wire and fix it in place with pegs.



### STEP 2: ENTER INDIVIDUAL DATA

This will enable your XR robotic mower to work autonomously.



### READY TO MOW

First, your XR robotic mower will mow along the perimeter wire and then return to the base. If there is enough capacity left, it will set off again and mow your lawn in a random pattern.

## EASY START

## XR1 ENDURO SERIES™

The Cub Cadet XR1 500 robotic mower is ideal for anyone owning a smaller lawn of up to 500 m<sup>2</sup> and looking for a compact yet high-performance mower. Driven by a 12V/8.8 Ah lithium-ion battery and a 100-watt motor, it's the most powerful entry level machine on the market, meaning a better cut in all conditions. The optimised mowing and drive motors combined with the sure-grip spiked wheels achieve a high area performance.

Only 3 hours of mowing are required per day for 500 m<sup>2</sup> of lawn. Which means the lawn is available to you 21 hours a day.



For more information and videos.



### XR1 500

<b>Cutting width:</b>	18 cm / 7"
<b>Cutting height:</b>	15–45 mm
<b>Mowing area (max*):</b>	500 m <sup>2</sup>
<b>Mowing area (rec.):</b>	400 m <sup>2</sup>
<b>Mowing time:</b>	180–210 min
<b>Engine:</b>	DC Brush
<b>Electricity consumption:</b>	8 kWh/month
<b>Model no.:</b>	22BXGALD603





## KEY BENEFITS



### ROBOCONNECT

Allows the XR1 to be controlled and programmed via the Internet.



### EXTERNAL CHARGING STATION

Place the base station near the edge of the lawn area to be mowed so that you can use the entire area as soon as your robotic mower is finished.



### ROBOHOME (INCL.)

A garage for your XR1 500; Installed above the charging station, the robohome device keeps the mower clean and protects it from rain and direct sunlight.



### FLOATING MULCHING DECK

This ensures the XR1 500 manages any terrain and mows with extreme precision.

**PATENTED**



### MULCH CLEANER

Our unique patented mulch cleaner independently cleans the mowing deck by automatically clearing the clippings out of the mowing deck while mowing, improving performance and reducing maintenance.



### SPECIALLY DESIGNED SPIKE WHEELS

A strong grip that provides better manoeuvrability, even on wet grass and borders.



### RELIABLE MOTOR

With our extremely sturdy and powerful 100-watt output motor you can look forward to a long service life with minimal maintenance.



### METAL SKI

Ski-type metal running surfaces deliver maximum manoeuvrability, providing easy mowing even in the tightest of spaces.



### 12V/8.8 AH LI-ION BATTERY

The XR1 500 is powered by a modern lithium-ion battery and mows for 3 hours without recharging.

**Cub Cadet®**

**XR2**  
**ENDURO SERIES™**

For more  
information  
and videos.



## **BRILLIANT CUT FROM THE GROUND UP**

The two XR2 models are the perfect place to start in the mid robotic mower range, ideal for lawns up to 2,000m<sup>2</sup>.

As well as edge mode that ensures that every edge is mowed, these models have a floating mowing deck to handle challenging terrain with incredible accuracy.

And thanks to the specially designed spiked wheels, the XR2 models manoeuvre extremely well and safely – even on wet grass.

## MODELS AVAILABLE



### XR2 1000

<b>Cutting width:</b>	28 cm / 11"
<b>Cutting height:</b>	15–60 mm
<b>Mowing area (max.*):</b>	1,000 m <sup>2</sup>
<b>Mowing area (rec.):</b>	500 m <sup>2</sup>
<b>Mowing time:</b>	45–50 min
<b>Motor:</b>	DC Brush
<b>Electricity consumption:</b>	11 kWh/month
<b>Model no.:</b>	22CCBAAD603



### XR2 2000

<b>Cutting width:</b>	28 cm / 11"
<b>Cutting height:</b>	15–60 mm
<b>Mowing area (max.*):</b>	2,000 m <sup>2</sup>
<b>Mowing area (rec.):</b>	1,200 m <sup>2</sup>
<b>Mowing time:</b>	60–70 min
<b>Motor:</b>	DC Brushless
<b>Electricity consumption:</b>	18 kWh/month
<b>Model no.:</b>	22BCAFAD603

Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.

## KEY BENEFITS



#### ROBOCONNECT

Allows you to access the online portal features. Our XR2 2000 model also comes with a GPS feature to locate the mower when necessary.



#### EXTERNAL CHARGING STATION

Our charging station doesn't have to be directly on the lawn, it can also be installed next to it.



#### ROBOHOME (INCL. WITH XR2 2000)

A garage for your XR2; Installed above the charging station, the device keeps the mower clean and protects it from rain and direct sunlight.



#### SPECIALLY DESIGNED SPIKED WHEELS

A strong grip that provides better manoeuvrability, even on wet grass.



#### SMART MODE

Instead of just stopping and turning, shortly before it reaches the perimeter wire, the XR2 mower turns in a continuously smooth arc, saving time.




#### BLE (BLUETOOTH® LOW-ENERGY) REMOTE CONTROL

Allows the XR2 to be controlled conveniently from a distance\* available as an accessory.




#### HIGH-PERFORMANCE MOTOR

200 Watt ensures top-level performance and extremely efficient mowing. The XR2 2000 even features a brushless and therefore practically wear-free motor.




#### TURBO MODE

Turns on automatically the first time you use your mower to mow long grass faster and switches off instantly for shorter grass. Can also be set manually.



#### LONG BATTERY LIFE

With twice as many charging cycles as conventional Li-Ion batteries, the LiFePO<sub>4</sub> high-capacity battery doubles battery life for longer hassle free mowing.



#### MAXIMUM MANOEUVRABILITY

A single front wheel ensures great manoeuvrability, especially whilst mowing the edge of the lawn.



#### PATENTED

#### PATENTED STEEL BLADE

The heavy duty steel blade will mow over twigs with ease.



#### ROBOGRIPS

Improved traction and added grip on inclines and slippery surfaces.

\* Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.

## XR3 ENDURO SERIES™

For more  
information  
and videos.



### **EXTREMELY STRONG AND POWERFUL**

The two XR3 models are in a class of their own. They feature an extremely durable and rapid mowing system that meets the highest demands for lawns up to 5,000m<sup>2</sup>.

These top-of-the-range models also include the unique edge mode where blades extend beyond the wheel base, ensuring that absolutely every edge is mown: no more having to manually tidy up afterwards with a lawn trimmer.

The high-performance brushless motors operate at 2 x 200 Watt and are extremely durable.

## MODELS AVAILABLE



### XR3 3000

Cutting width:	56 cm / 22"
Cutting height:	20–80 mm
Mowing area (max.*):	3,000 m <sup>2</sup>
Mowing area (rec.):	1,600 m <sup>2</sup>
Mowing time:	55–70 min
Motor:	DC Brushless
Electricity consumption:	22 kWh/month
Model no.:	22BSBAAD603



### XR3 5000

Cutting width:	56 cm / 22"
Cutting height:	20–80 mm
Mowing area (max.*):	5,000 m <sup>2</sup>
Mowing area (rec.):	3,600 m <sup>2</sup>
Mowing time:	80–100 min
Motor:	DC Brushless
Electricity consumption:	34 kWh/month
Model no.:	22BSGAGD603

\*Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.

## KEY BENEFITS



### FLOATING MOWING DECK

Flawlessly handles challenging terrain with incredible accuracy.



### ROBOCONNECT

Allows you to access the online portal features. Our XR3 5000 model also comes with a GPS feature to locate the mower when necessary.



### EXTERNAL CHARGING STATION

Our charging station doesn't have to be directly on the lawn, it can also be installed next to it.



### ROBOHOME (INCL. WITH XR3 5000)

A garage for your XR3: Installed above the charging station, the device keeps the mower clean and protects it from rain and direct sunlight.



### SPECIALLY DESIGNED SPIKED WHEELS

A strong grip that provides better manoeuvrability, even on wet grass.



### ROBOGRIPS

Improved traction and added grip on inclines and slippery surfaces.




### BLE (BLUETOOTH® LOW-ENERGY) REMOTE CONTROL

Allows the XR3 to be controlled conveniently from a distance\* (Standard on XR3 5000.)




### EXTREMELY POWERFUL BRUSHLESS MOTOR

2 x 200 Watt ensure outstanding mowing performance.



### TURBO MODE

Turns on automatically the first time you use your mower to mow long grass faster and switches off instantly for shorter blades. Can also be set manually.



### LONG BATTERY LIFE

With twice as many charging cycles as conventional Li-Ion batteries, the LiFePO<sub>4</sub> high-capacity battery doubles battery life.



### PATENTED

### PATENTED STEEL BLADE

The heavy duty steel blade will mow over twigs with ease.



### MAXIMUM MANOEUVRABILITY

A single front wheel ensures great manoeuvrability, especially whilst mowing the edge of the lawn.

\*The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.  
\*Within Bluetooth® range

## XR1 500

## XR2 1000



## XR2 2000

ENGINE			
Motor type	DC Brush	DC Brush	DC Brushless
Mowing power	100 Watt	200 Watt	200 Watt
BATTERY			
Battery	12V / 10.2 Ah Li-Ion	26V lithium iron phosphate 2.4 Ah (LiFePO <sub>4</sub> )	26V lithium iron phosphate 3 Ah (LiFePO <sub>4</sub> )
Mowing time	180–210 min	45–50 min	60–70 min
Charging time	16–18 h	50–70 min	70–90 min
Power consumption	8 kWh/month	11 kWh/month	18 kWh/month
CUTTING SYSTEM			
Mowing area (max*)	500 m <sup>2</sup>	1,000 m <sup>2</sup>	2,000 m <sup>2</sup>
Mowing area (rec.)	400 m <sup>2</sup>	500 m <sup>2</sup>	1,200 m <sup>2</sup>
Cutting width	18 cm / 7"	28 cm / 11"	28 cm / 11"
Cutting height (min.–max.)	15–45 mm	15–60 mm	15–60 mm
Blades	Steel	Steel	Steel
Mowing zones	1 main zone, 2 sub zones, 2 separate zones	1 main zone, 3 sub zones, 2 separate zones	1 main zone, 3 sub zones, 2 separate zones
Area coverage per hour	55 m <sup>2</sup> /h	75 m <sup>2</sup> /h	75 m <sup>2</sup> /h
Maximum inclination	8.5° / 15 %	20° / 36 %	20° / 36 %
EQUIPMENT			
Base station	Standard	Standard	Standard
RoboHome	Standard	Optional (122-075-603)	Standard
RoboGrips	Standard	Standard	Standard
Display	–	LED	LED
Bluetooth®	Standard	Standard	Standard
Bluetooth® Remote Control	–	Optional (MRK7100A)	Optional (MRK7100A)
Smart App 2.0	Standard	Standard	Standard
Alexa enabled	Standard	Standard	Standard
Rain sensor	–	Standard	Standard
Anti-theft precautions	Standard	Standard	Standard
Bump-Sensor	Standard	–	–
Tilt-Sensor	Standard	Standard	Standard
Lift-Sensor	Standard	Standard	Standard
Edge mode	–	Standard	Standard
Smart mode	–	Standard	Standard
GSM module/GPS	Standard/–	Standard/–	Standard/Standard
Turbo mode	–	Standard	Standard
Large power wheels	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	70/68/70	70/68/70	70/68/70
Dimensions (L/W/H)	53 cm / 42 cm / 26 cm	63 cm / 46 cm / 21 cm	63 cm / 46 cm / 21 cm
Net weight	7.5 kg	11.1 kg	11.4 kg
Model number	22BXGALD603	22CCBAAD603	22BCFAFD603
EAN	 4 008423 892093	 4 008423 883398	 4 008423 883435

\* Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.














## XR3 3000

## XR3 5000






ENGINE		
Motor type	DC Brushless	DC Brushless
Mowing power	2 x 200 Watt	2 x 200 Watt
BATTERY		
Battery	26V lithium iron phosphate 4,5 Ah (LiFePO <sub>4</sub> )	26V lithium iron phosphate 6 Ah (LiFePO <sub>4</sub> )
Mowing time	55–70 min	80–100 min
Charging time	90–110 min	90–110 min
Power consumption	22 kWh/month	34 kWh/month
CUTTING SYSTEM		
Mowing area (max*)	3,000 m <sup>2</sup>	5,000 m <sup>2</sup>
Mowing area (rec.)	1,600 m <sup>2</sup>	3,600 m <sup>2</sup>
Cutting width	56 cm / 22"	56 cm / 22"
Cutting height (min.–max.)	20–80 mm	20–80 mm
Blades	Steel	Steel
Mowing zones	1 main zone, 4 sub zones, 2 separate zones	1 main zone, 4 sub zones, 2 separate zones
Area coverage per hour	180 m <sup>2</sup> /h	180 m <sup>2</sup> /h
Maximum inclination	20° / 36 %	20° / 36 %
EQUIPMENT		
Base station	Standard	Standard
RoboHome	Optional (122-075-603)	Standard
RoboGrips	Standard	Standard
Display	LCD	LCD
Bluetooth®	Standard	Standard
Bluetooth® Remote Control	Optional (MRK7100A)	Standard
Smart App 2.0	Standard	Standard
Alexa enabled	Standard	Standard
Rain sensor	Standard	Standard
Anti-theft precautions	Standard	Standard
Bump-Sensor	Standard	Standard
Tilt-Sensor	Standard	Standard
Lift-Sensor	Standard	Standard
Edge mode	Standard	Standard
Smart mode	Standard	Standard
GSM module/GPS	Standard/–	Standard/Standard
Turbo mode	Standard	Standard
Large power wheels	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	70/72/74	70/72/74
Dimensions (L/W/H)	73.5 cm / 66 cm / 31 cm	73.5 cm / 66 cm / 31 cm
Net weight	20 kg	20.2 kg
Model number	22BSAAD603	22BSGAGD603
EAN	 4 008423 883442	 4 008423 883466

\* Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.

## ROBOTIC MOWER ACCESSORIES

PERIMETER SETTING			
	Perimeter wire (650 metres on spool)	 7 290109 391458	Mod. no.: MRK0067B
	Installation Kit small (for max. 400 m <sup>2</sup> ) 100 m wire, 150 pegs	 4 008423 885149	Mod. no.: 122-001-603
	Installation Kit medium (for max. 1,200 m <sup>2</sup> ) 150 m wire, 200 pegs	 4 008423 885156	Mod. no.: 122-002-603
	Installation Kit large (for max. 2,500 m <sup>2</sup> ) 250 m wire, 350 pegs	 4 008423 885163	Mod. no.: 122-003-603
ROBOZONE			
	RoboZone with power supply for all XR models	 4 008423 892512	Mod. no.: 122-025-603
	RoboZone mobile with battery for all XR models	 4 008423 892543	Mod. no.: 122-039-603
BASE STATIONS			
	Base station Kit for XR1 500	 7 290109 390772	Mod. no.: MRK9105A
	Base station Kit for XR2 models	 4 008423 894561	Mod. no.: MRK7006C
	Base station Kit for XR3 models	 4 008423 894554	Mod. no.: MRK6102C
COVERS			
	RoboHome for XR2 models	 4 008423 892567	Mod. no.: 122-075-603
	RoboHome for XR3 models	 4 008423 892550	Mod. no.: 122-072-603
CONTROL			
	Bluetooth® remote control for XR2/XR3 models	 7 290014 674202	Mod. no.: MRK7100A
BLADES			
	1 blade kit XR2 models	 7 290014 674189	Mod. no.: MRK7003A
	2 blade kit XR3 models	 7 290001 944103	Mod. no.: MRK6101A



	<b>GRIPS</b> RoboGrips XR2 models (for XR2 Powerwheels)	 7 290109 390970 Mod. no.: MRK7023A
	RoboGrips XR3 models (for XR3 Powerwheels)	 7 290109 391045 Mod. no.: MRK6022A
	<b>ROBOCONNECT+</b> Included with the XR2 2000 and XR3 5000 models.	 4 008423 892574 Mod. no.: 122-143-619



**4**  
ROBOTIC MOWERS

*Cub Cadet*®





**LC**

**FORCE SERIES**

**XCC**

**ENDURO SERIES™**

# LOADS OF GARDENING POWER

## CHORE PERFORMERS.

Innovation, selection and performance are all strengths of the complete line up of Cub Cadet chore performers. From the ground breaking XC3 F46 tiller and the LC3 DP56 lawn trimmer to the XC1 B40 scarifier, Cub Cadet chore performers support you with a strong engine and a powerful performance during the whole gardening season.


## SCARIFIER – THE BEAUTY TREATMENT FOR YOUR LAWN.

Scarifying is a key part of optimal lawn care. It helps fight the notorious thatch which forms on every lawn and blocks the supply of air, water and nutrients to the roots. Correct scarifying will let your lawn breathe again. The Cub Cadet XC1 applies the power you need to remove this thatch and let sunlight, air and water once again reach the soil and roots. The XC1 also features blades and springs, this means you get two functions in a single machine; aerating and scarifying.



### BLADES AND SPRINGS

The XC1 B40 has 17 flail double blades and 14 springs. If you would like to aerate the soil, use the higher position with a gentle touch of the blades and springs on the surface of the soil. If there is the need to scarify, set the position of the blades and springs to a 3mm working depth.



### REMOTE TRANSPORT POSITION

With the lever on the handle you can switch from transport to working position conveniently from behind the unit.



### WORKING DEPTH ADJUSTMENT

The working depth can easily be changed centrally.



### IMPORTANT LAWN CARE INFORMATION:

After scarifying your lawn, please don't forget to reseed blank spots and nourish it with fertiliser and water.



### XC1 B40

Working width:	40 cm / 16"
Mowing area:	1,000 m <sup>2</sup> /h
Grass bag capacity:	60 l optional
Engine:	Cub Cadet 35 H OHV
Engine displacement:	123 cm <sup>3</sup>
Drive:	Pushed
Working depth adjustment:	Central
Model number:	16CH8AMQ603

## ACCESSORY

### SCARIFIER

Collection bag, 60 litre



4 008423 876772  
Mod. no.: 196-640-000

## GARDEN TILLER – GROUNDBREAKING IN EVERY SENSE OF THE WORD

Using the XC3 garden tiller, the strenuous and time-consuming task of digging and loosening the soil with a spade is a thing of the past. Powerful and reliable, this tiller tackles any job; breaking up even the hardest of soil and facilitating seed preparation. It is ideal for areas of up to 1,000 m<sup>2</sup>.

Four self-sharpening, heat-treated, high-quality tine sets made of spring steel ensure excellent work results at a tilling width of 46 cm / 18". The adjustable depth stake improves the machine stability and allows control of the working speed and tilling depth.




**USER-FRIENDLY**  
Single-hand operation allows you to avoid footprints in areas already worked on.



**FULL COVER**  
Fully covered tine set with 46 cm / 18" working width.



**DEPTH STAKE**  
Fully adjustable depth stake.



**BI-DIRECTIONAL TINES**  
The self-sharpening tines (330mm dia) rotate forward for milling and backward for deep digging. They produce a fine crumbled bed in any soil.



**EXTRA-WIDE**  
Extra-wide 46 cm / 18" tilling width gives you more tilling area per pass – helping you cover more ground at a time.



### XC3 F46

<b>Working width:</b>	46 cm / 18"
<b>Area performance (rec.):</b>	1,000 m <sup>2</sup> /h
<b>Engine:</b>	Cub Cadet 65 H OHV
<b>Engine displacement:</b>	208 cm <sup>3</sup>
<b>Drive:</b>	Dual Direction
<b>Working depth adjustment:</b>	Adjustable depth stake
<b>Net weight:</b>	104 kg
<b>Model no.:</b>	21BB45M8603



## LAWN TRIMMER – STRONG ENOUGH TO CUT EVERYTHING

The Cub Cadet LC3 DP56 lawn trimmer is ideal for clearing long grass and heavy scrub. With the powerful Cub Cadet engine and ultra-large cutting width (56cm / 22") you can trim long grass and weeds at a stroke.

### EXCEPTIONALLY EASY TO HANDLE

The large, 36cm diameter wheels negotiate even uneven ground with remarkable agility. The special design of the cutting head helps you effortlessly curve around obstacles and reach into corners.

### POWERFUL PERFORMANCE

Thanks to the power of a high-quality Cub Cadet engine, managing tough jobs is a breeze. Another area where the Cub Cadet comes into its own.

### EASY HEIGHT ADJUSTMENT

Adjust the cutting height to your requirements with ease. Low to trim along fences, walls and buildings, higher for long, dense weeds on open ground.



### LC3 DP56



<b>Cutting width:</b>	56 cm / 22"
<b>Cutting height:</b>	60–110 mm
<b>Line:</b>	Ø 4 mm
<b>Engine:</b>	Cub Cadet 55 OHV
<b>Wheels:</b>	Ø 360 mm
<b>Drive:</b>	Pushed
<b>Net weight:</b>	31 kg
<b>Model no.:</b>	25A-262E603

## ACCESSORY

### REPLACEMENT LINE FOR LC3 DP56



10 pcs. of cutting line AF3.20, cut to 3.9 mm x 47 cm length






4 056494 116662

Mod. no.: 1182-WS-0001

## XC1 B40

## XC3 F46

## LC3 DP56

ENGINE			
Engine type	Cub Cadet 35 H OHV	Cub Cadet 65 H OHV	Cub Cadet 55 OHV
Engine displacement	123 cm <sup>3</sup>	208 cm <sup>3</sup>	159 cm <sup>3</sup>
Rated power	2.3 kW / 3,600 min <sup>-1</sup>	3.9 kW / 3,600 min <sup>-1</sup>	2.1 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Pull	Pull
Tank volume (capacity)	1.7 l	2.2 l	1.0 l
WORKING METHOD			
Drive	Pushed	Dual Direction	Pushed
Rec. area capacity (m <sup>2</sup> h)	1,000	1,000	1,000
Housing (material)	Steel with plastic	–	–
Cutting and working width	40 cm / 16"	46 cm / 18"	56 cm / 22"
Blade	Ø 163 mm	4 (2x2), 33 cm	Ø 4 mm
Cutting height adjustment	Stepless/central	–	–
Cutting height (min/max)	0 to -15 mm	–	60–110 mm
Chopping shaft direction of rotation	–	Forward/Reverse	–
Balancing weight at front	–	Standard	–
Side cover/Grass-collection	–	Standard	–
Tailgate	Standard	With rake	–
Rear discharge without grass catcher	Standard	–	–
Lawn aeration	Standard	–	–
BLADE			
Blade drive	V-belt	–	V-belt
Scarifier blade	34 (17 double blade)	–	–
Springs for lawn aeration	32 (16 double springs)	–	–
COLLECTING			
Grass bag	Optional (196-640-000)	–	–
Grass bag (capacity)	Optional 60 l	–	–
WHEELS			
Wheels (f/r)	200 mm / 200 mm	355 mm, pneumatic tyres, field studs	Ø 360 mm
Double ball bearing	Standard	–	–
COMFORT			
Clutch lever	–	Unbroken bar for left/right single-handed operation	–
Handlebar type	–	Steplessly height-adjustable for ergonomic and safe working	3 positions
DIMENSIONS			
LpA/LwA/LwAg (dB)	86/96/98	98/108/110	93/106/108
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 2.5 m/s <sup>2</sup>	6.5 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	124 cm / 61 cm / 112 cm	172 cm / 61 cm / 114 cm	140 cm / 55 cm / 100 cm
Net weight	39 kg	104 kg	31 kg
Model number	16CH8AMQ603	21BB45M8603	25A-262E603
EAN	 4 008423 853223	 4 008423 875539	 4 008423 881967

*Cub Cadet*<sup>®</sup>







**XZ**  
**ENDURO SERIES™**



**PRO Z SERIES**



**MASSIVE  
POWER,  
ZERO-TURN**

**FIND OUR NEW XZ5 ZERO-TURN  
ON PAGE 109**

**ZERO-TURNS**

Cub Cadet, the proven innovator of zero-turn technology, has created the industry's strongest line up of zero-turn riders. Our leading 360° turning technology lets you easily mow around obstacles with incredible confidence, making every mowing manoeuvre more efficient. And with models that feature four-wheel steering, you enjoy increased stability, control and faster cutting time.

**Cub Cadet**<sup>®</sup>

# XZ2

ENDURO SERIES™



## STRENGTH, EASE AND VERSATILITY.

Feature for feature, the XZ2 gives you more. Zero-Turn handling combined with the ease of steering-wheel control and four-wheel steering makes for unmatched stability and unprecedented versatility. An unbeatable combination, with undeniably excellent performance. Plus incredible durability to last for many years to come.

For more information and videos.




## KEY BENEFITS



### CUB CADET V-TWIN EFI ENGINE

For the first time, the XZ2 107i and XZ2 117i models feature an engine manufactured by Cub Cadet. The two-cylinder engine comes with exceptional performance and efficiency, saving fuel and keeping maintenance costs low.



### COMFORTABLE SEAT

The seat and backrest is specially designed for comfortable, fatigue-free working, even for extended periods.



### HYDROSTATIC

#### DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission provides you with optimal manoeuvrability. Available on the XZ Series.




### ELECTRIC START BUTTON

A convenient and reliable way to start your engine. Available on XZ2 107i and XZ2 117i. All other models are started by ignition key.



### ADJUSTABLE STEERING COLUMN

All XZ2 are equipped with a quick adjustable steering column to perfectly suit all operator heights.



### FLOATING CUTTING DECK

The floating deck follows the contours of the ground for superior cutting, providing a smoother and more uniform look.



### COLLECT OR MULCH

Although the XZ2 are exceptional mulchers, collection is an option with a 200 l twin bag.

## MODELS AVAILABLE



3-in-1  
OPTION  
POWERED BY  
Cub Cadet



### XZ2 107i

Cutting width:	107 cm / 42"
Mowing area:	10,000 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV EFI engine, V-TWIN dual cylinder
Engine displacement:	679 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17AWCBYS603



3-in-1  
OPTION  
POWERED BY  
Cub Cadet



### XZ2 117i

Cutting width:	117 cm / 46"
Mowing area:	10,500 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV EFI engine, V-TWIN dual cylinder
Engine displacement:	679 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17AWCBYT603



3-in-1  
OPTION  
Powered by  
Kawasaki

### XZ2 127

Cutting width:	127 cm / 50"
Mowing area:	11,500 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17AICBYQ603

**Cub Cadet**<sup>®</sup>

# XZ3

ENDURO SERIES™



## ZERO-TURNS. INFINITE STRENGTH.

High-performance meets practicality.

The Cub Cadet XZ3 122 has a heavy-duty, fabricated 122 cm / 48" deck with the versatility to mow around fences and trees. The easy-to-see centrally mounted deck maximises mowing accuracy in corners and under low obstacles. A low centre of gravity and wide wheelbase allow the machine to glide over uneven ground and still cut in a completely straight line across hills and slopes. Tough terrain and steep hills are no problem with this added traction and control.

The advanced mulching technology incorporated in this machine re-circulates the airflow around the cutting deck delivering effective and efficient mulching capabilities. A superior mulcher.

For more  
information  
and videos.





## HYDROSTATIC

### DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission provides you with optimal manoeuvrability. Available on the XZ Series.

## MODEL AVAILABLE



### XZ3 122

Cutting width:	122 cm / 48"
Mowing area:	11,000 m <sup>2</sup> /h
Grass bag capacity:	300 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Model number:	17BIDGHB603

## SYNCHRO STEER® TECHNOLOGY



### UNBEATABLE MANOEUVRABILITY AND UNMATCHED CLIMBING ABILITY

Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but with full control of the front wheels.

Steering and drive are perfectly synchronised to ensure the exact speed and rotating direction of each rear wheel, whatever the position of the front wheels. This revolutionary technology is available for the XZ2 and XZ3 Series.

## KEY BENEFITS



### ADJUSTABLE STEERING COLUMN

The XZ3 is equipped with an adjustable steering column ensuring you find the perfect position.



### COMFORTABLE SEAT WITH ARMRESTS

The high-back seat with armrests ensures that your work will be done in comfort.



### PNEUMATIC FRONT WHEELS

Controllable pneumatic front wheels which support the Zero-Turn of your XZ3.



### ROUNDED MOWING DECK ROLLERS

Prevent damage to the turf when cornering tight bends.



### STEERING WHEEL

A soft grip steering wheel for great control in tough conditions.



### LARGE SIDE EJECTION DEFLECTOR

Helps spread the cuttings over a large area.



### FLOATING CUTTING DECK

The floating deck follows the contours of the ground for superior cutting, providing a smoother and more uniform look.

**NEW**

The XZ5 Ultima Series redefines the zero-turn mowing experience - with enhanced strength, reimaged comfort and a best-in-class cut.

The latest steering lever lap bar technology combined with the extremely robust construction of heavy-duty components and high-performance engine makes the Ultima series the ideal professional machines for large lawn maintenance.

Powerful Cub Cadet and Kawasaki engines mean the machines reach up to 7.5 mph / 12 km/h, mowing up to 50% faster than front mowers and able to mow up to 12,500 m<sup>2</sup>/h.

The open continuous tubular lightweight steel frame designed for strength and durability with its hinged/removable floor pan allows quick and easy access to the deck and engine for ease of maintenance.

Available with cutting widths of 42" / 107 cm, 50" / 127 cm and 54" / 137 cm the three machines put owner/operator comfort at the forefront of their design with individually adjustable seats and high backrests for fatigue-free working.

The Ultima Series™ from Cub Cadet. Professional grade power for your business and your lawns.



## KEY BENEFITS



### BUILT WITH STRENGTH

Our continuous lightweight tubular steel frame is designed for strength and durability.



### OPEN FRAME DESIGN

Hinged/removable floor pan allowing quick and easy access to the deck and engine for ease of maintenance.



### LAP BAR CONTROLLED DUAL HYDROSTATIC TRANSMISSION

With mow in reverse.




### INDIVIDUALLY ADJUSTABLE COMFORT SEAT

With high backrest and armrests for comfortable and fatigue-free working.



### EXTREMELY POWERFUL

Cub Cadet and Kawasaki engines, mean the ULTIMA XZ5 models reach up to 12km/h, mowing up to 50% faster than front mowers.



### LARGEST TYRES OF ITS CLASS

The premium tyres of the XZ5 127 and XZ5 137 provide better traction and more stability and control.



### EXCEPTIONALLY LOW VIBRATION

With ergonomic soft grips and rubber floor mats.



### ULTRA-BRIGHT LED HEADLIGHTS

Best visibility in poor lighting conditions, for example at dawn and dusk.

## MODELS AVAILABLE

**NEW**

POWERED BY  
**Cub Cadet**



### XZ5 L107

<b>Cutting width:</b>	107 cm / 42"
<b>Mowing area:</b>	10,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 230 l
<b>Engine:</b>	Cub Cadet, V-Twin dual cylinder
<b>Engine displacement:</b>	679 cm <sup>3</sup>
<b>Drive:</b>	Dual Hydrostatic
<b>Cutting height adjustment:</b>	15 positions
<b>Model no.:</b>	17AAEACS603

**NEW**

Powered by  
**Kawasaki**



### XZ5 L127

<b>Cutting width:</b>	127 cm / 50"
<b>Mowing area:</b>	11,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 230 l
<b>Engine:</b>	Kawasaki OHV, V-Twin dual cylinder
<b>Engine displacement:</b>	726 cm <sup>3</sup>
<b>Drive:</b>	Dual Hydrostatic
<b>Cutting height adjustment:</b>	15 positions
<b>Model no.:</b>	17AIEAC2603

**NEW**

Powered by  
**Kawasaki**



### XZ5 L137



<b>Cutting width:</b>	137 cm / 54"
<b>Mowing area:</b>	12,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 230 l
<b>Engine:</b>	Kawasaki OHV, V-Twin dual cylinder
<b>Engine displacement:</b>	726 cm <sup>3</sup>
<b>Drive:</b>	Dual Hydrostatic
<b>Cutting height adjustment:</b>	15 positions
<b>Model no.:</b>	17AIEAC1603

ZERO-TURNS

6

## XZ2 107i


## XZ2 117i

ENGINE		
Engine type	Cub Cadet OHV EFI engine	Cub Cadet OHV EFI engine
Engine displacement	679 cm <sup>3</sup>	679 cm <sup>3</sup>
Rated power	11.4 kW / 2,400 min <sup>-1</sup>	11.4 kW / 2,400 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	10.5 l	10.5 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM		
Transmission	Dual Hydrostatic	Dual Hydrostatic
Control	Dual foot pedal control	Dual foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> /h	10,000	10,500
Cutting width	107 cm / 42"	117 cm / 46"
Cutting height (min-max)	38–100 mm	38–100 mm
Cutting options	3-in-1 Option	3-in-1 Option
Number of blades	2	2
Deck engagement	Electric PTO	Electric PTO
Deck height positions	8	8
Deck wheels	2	4
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity in l)/accessory no.	200 l optional/(19C70020100)	200 l optional/(19C70020100)
Grass deflector	Standard	Standard
FRAME		
Front axle	Steel	Steel
Front bumper/rear bumper	-/-	-/-
Turning circle (cm)	0 cm	0 cm
Wheel size (f/r)	13" x 5" / 18" x 8.5"	13" x 5" / 18" x 8.5"
Wheel bearings	Sleeve bearings	Sleeve bearings
ELECTRICAL SYSTEM		
Battery	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Operator presence, brake switch, deck clutch switch	Operator presence, brake switch, deck clutch switch
COMFORT		
Seat type	High back	High back
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip, tilt steering column	Soft-Grip, tilt steering column
Utility bin	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/110	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s <sup>2</sup>	1 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5 / 1.5 m/s <sup>2</sup>	5 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	203 cm / 116 cm / 118 cm	203 cm / 126 cm / 118 cm
Net weight	234 kg	256 kg
Model number	17AWCBYS603	17AWCBYT603
EAN	 4 008423 881905	 4 008423 881912





## XZ2 127







## XZ3 122

ENGINE		
Engine type	Kawasaki OHV	Kawasaki OHV
Engine displacement	726 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	12.0 kW / 2,400 min <sup>-1</sup>	12.3 kW / 2,750 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	10.5 l	Dual 8.5 litre fuel tanks
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM		
Transmission	Dual Hydrostatic	Dual Hydrostatic
Control	Dual foot pedal control	Dual foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> /h	11,500	11,000
Cutting width	127 cm / 50"	122 cm / 48"
Cutting height (min-max)	38–100 mm	25–102 mm
Cutting options	3-in-1 Option	3-in-1 Option
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	8	15
Deck wheels	4	2
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity in l)/accessory no.	200 l optional/(19A70043100)	Triple 300 l optional/(19A70040100)
Grass deflector	Standard	Standard
FRAME		
Front axle	Steel	Cast-iron
Front bumper/rear bumper	-/-	Standard/-
Turning circle (cm)	0 cm	0 cm
Wheel size (f/r)	13" x 5" / 18" x 9.5"	13" x 5" / 20" x 10"
Wheel bearings	Ball-bearings	Ball-bearings
ELECTRICAL SYSTEM		
Battery	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Operator presence, brake switch, deck clutch switch	Operator presence, brake switch, deck clutch switch
COMFORT		
Seat type	High back	High back with armrests and gel suspension
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip, tilt steering column	Soft-Grip, adjustable steering column
Utility bin	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	93/103/105	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s <sup>2</sup>	1 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5 / 1.5 m/s <sup>2</sup>	5 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	203 cm / 131 cm / 118 cm	194 cm / 124 cm / 118 cm
Net weight	265 kg	312 kg
Model number	17AICBYQ603	17BIDGHB603
EAN	 4 008423 882124	 4 008423 875461

**NEW**
**XZ5 L107**
**NEW**
**XZ5 L127**
**NEW**
**XZ5 L137**

<b>ENGINE</b>			
Engine type	Cub Cadet	Kawasaki OHV	Kawasaki OHV
Engine displacement	679 cm <sup>3</sup>	726 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	11.4 kW / 2,350 min <sup>-1</sup>	14.7 kW / 2,900 min <sup>-1</sup>	14.7 kW / 2,900 min <sup>-1</sup>
Cylinders	V-Twin dual cylinder	V-Twin dual cylinder	V-Twin dual cylinder
Tank volume (capacity)	13.25 l	13.25 l	13.25 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
<b>DRIVE SYSTEM</b>			
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Control lever	Control lever	Control lever
Cruise control	–	–	–
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	10,000	11,500	12,500
Cutting width	107 cm / 42"	127 cm / 50"	137 cm / 54"
Cutting height (min-max)	25–115 mm	25–115 mm	25–115 mm
Cutting options	3-in-1 Option	3-in-1 Option	3-in-1 Option
Number of blades	2	3	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	15 positions	15 positions	15 positions
Deck wheels	2	3	3
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard	Standard/Standard
<b>DISCHARGE SYSTEM</b>			
Bag (capacity in l)/accessory no.	Optional 230 l/(19A70054100)	Optional 230 l/(19A70054100)	Optional 230 l/(19A70054100)
Grass deflector	Standard	Standard	Standard
<b>FRAME</b>			
Front axle	Steel	Steel	Steel
Front bumper/rear bumper	– / –	– / –	– / –
Turning radius (cm)	0 cm	0 cm	0 cm
Wheel size (f/r in inch)	11" x 6" / 20" x 8"	11" x 6" / 20" x 10"	13" x 6.5" / 20" x 12"
Wheel bearings	–	–	–
<b>ELECTRICAL SYSTEM</b>			
Battery	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	Standard	Standard	Standard
Hour metre/service minder	Standard	Standard	Standard
Safety systems	–	–	–
<b>COMFORT</b>			
Seat type	High back, with arm rests	High back with armrests	High back with armrests
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips
Utility bin	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
<b>DIMENSIONS</b>			
LpA/LwA/LwAg (dB)	88/98/100	93/103/105	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s <sup>2</sup>	1 / 0.5 m/s <sup>2</sup>	1 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5 / 1.5 m/s <sup>2</sup>	5 / 1.5 m/s <sup>2</sup>	5 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	203 cm / 132 cm / 114 cm	203 cm / 155 cm / 114 cm	203 cm / 164 cm / 117 cm
Net weight	267 kg	285 kg	312 kg
Model number	17AAEACS603	17AIEACZ603	17AIEACI603
EAN	 4 008423 913187	 4 008423 913170	 4 008423 913163

## ZERO-TURN ACCESSORIES

	<b>GRASS CATCHER</b>		
	Twin bagger, 200 l, for XZ2 117i	 0 037049 957835	Mod. no.: 19C70020100
	<b>DOZER BLADE</b>		
	Dozer blade for XZ3 and Z1	 4 008423 881172	Mod. no.: 19B70044100
	<b>HITCH / XZ</b>		
	Hitch for all XZ2 models	 0 043033 565054	Mod. no.: 19A70025100



# PRO ZERO-TURNS.

The PRO SERIES Zero-Turns are the strongest and most efficient line up of commercial mowers. Proven by landscape professionals, Cub Cadet commercial Zero-Turn mowers provide the ultimate performance, comfort and durability. From frame to front yoke, the PRO Zero-Turns are designed to handle the serious demands of professionals.


# ULTIMATE POWER, FOR PROFESSIONAL REQUIREMENTS.



ZERO-TURNS

**6**

# PRO SERIES

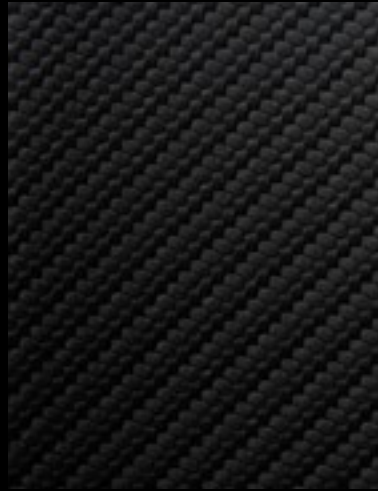

## **BUILT FOR YOUR BUSINESS.**

**When you are looking to update your commercial mowers the key things to consider are performance, durability and operator comfort.**

**Proven by landscape professionals our PRO Z series of zero-turns will fulfil all your commercial requirements. Providing a fast, premium quality cut, unmatched user comfort and ultimately built for the long haul. Perfect for the challenging environments you face everyday.**

**The PRO Z series is our strongest, most efficient line up of zero-turn machines.**

**LESS DOWNTIME, MORE GO TIME.**


# Performance and amazing manoeuvrability.

Our patented SyncroSteer® technology with steering wheel means that inexperienced operators can easily use the steering wheel and dual hydrostatic transmission to control all four wheels, minimising the turf being churned up by the wheels and ensuring the ultimate manoeuvrability – an exclusive offering in the commercial sector.

- ▶ Reduces mowing time by up to 10% compared to lap bar mowers
- ▶ Delivers true zero-turn handling with less overlap and straighter lines
- ▶ Four-wheel steering control ensures unmatched hillside stability and enhanced traction on uneven terrain

## Greater stability and control on banks and slopes

Steering wheel control and a wide stance provide better stability and control on banks and slopes up to 20°.

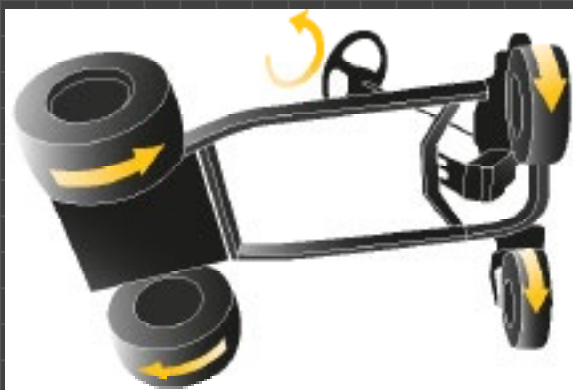

## Dual Hydrostation Transmission

The dual hydrostatic transmission ensures the ultimate manoeuvrability and control.





# Cut everything including downtime.

The PRO Z series powers through the thickest grass in one pass at maximum speeds of up to 12mph meaning you can do the job quicker. High torque commercial transmissions are paired with high horsepower commercial-grade engines to provide optimal and consistent blade speed. A 3" blade overlap ensures a tight, consistent cut. The frame and axle on the Z5 and Z7 float as the machine moves allowing the deck to follow the terrain and stop scalping.

Commercial grade petrol engines rather than diesel from Kohler and Kawasaki provide the consistent power you need to get the job done and maximise your work-day – reducing the downtime which could cost you both time and money. The petrol engines benefit from having lower emissions and reduced fuel usage.

## Kawasaki® High-Horsepower Engines




- ▶ Maximum horsepower in every series
- ▶ Optimum balance of torque and power
- ▶ Maximise blade tip speed, up to 18,500 fpm

Shown is the:  
Kawasaki® FX Series 35 hp\* (999 cc).

## Pivoting Front Axle


With isolation dampening system mounts on the PRO Z5 and PRO Z7 a pivoting front axle allows the front end to ride across unseen terrain while protecting the quality of the cut.

The frame and axle float as the PRO Z moves, allowing the deck to follow the shape of the terrain and avoid scalping.

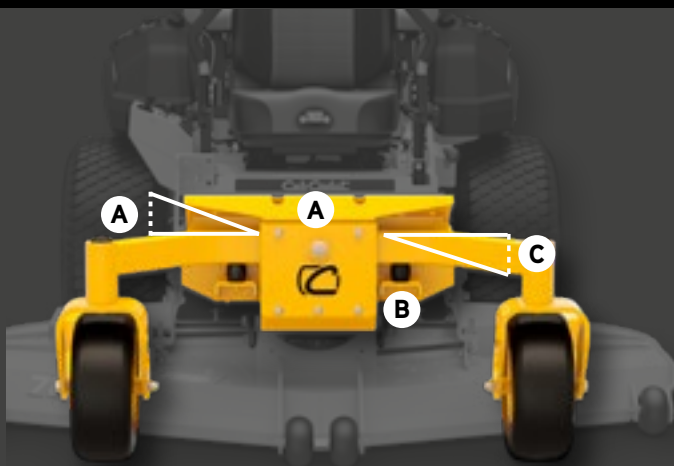


- A** 2 1/4" of travel (4 1/2" of total travel, industry-leading)
- B** Isolation dampening system
- C** Maximum angle of travel is 6°

## Max Speed [mph]

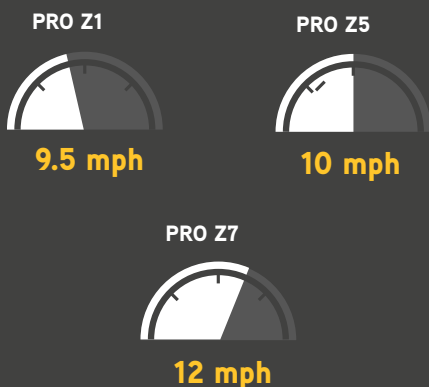


## Horsepower and Torque

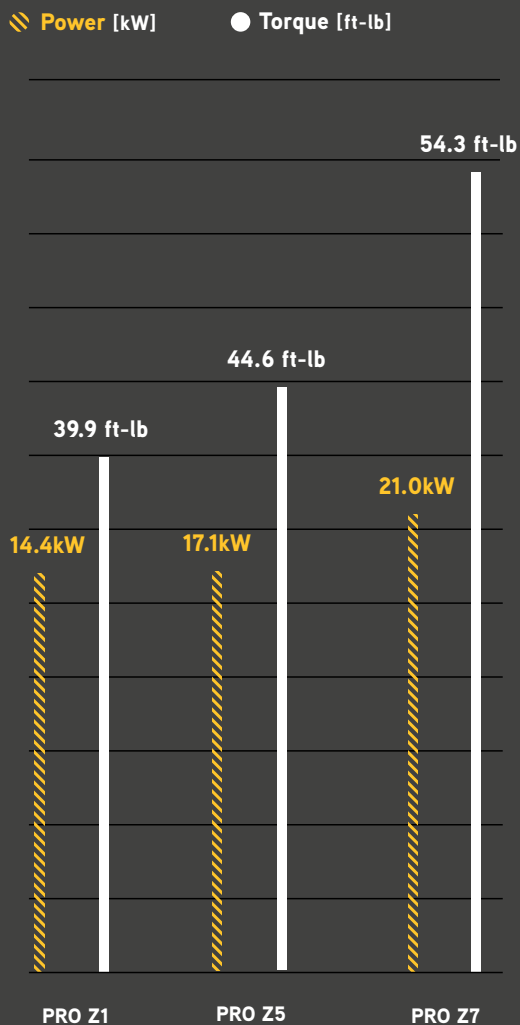

## Commercial-Quality Cut


High-lift Marbain® blades with blade tip speed up to 18,500 fpm

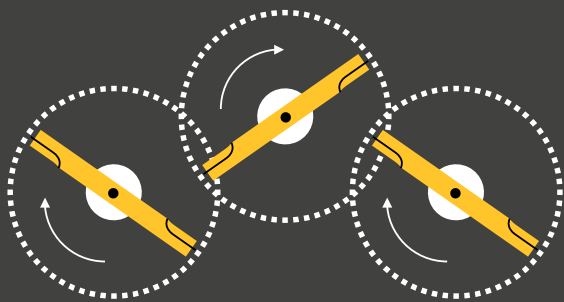

**3" total blade overlap**  
(ensures a tight, consistent cut)

# Heavy duty, for the long haul.

From frame to yoke every part of the PRO Z is designed to handle the serious rigours of commercial mowing. The thickness of the cutting deck established a new industry standard as the only triple-7-gauge steel cutting deck making it extremely durable for your demanding conditions.

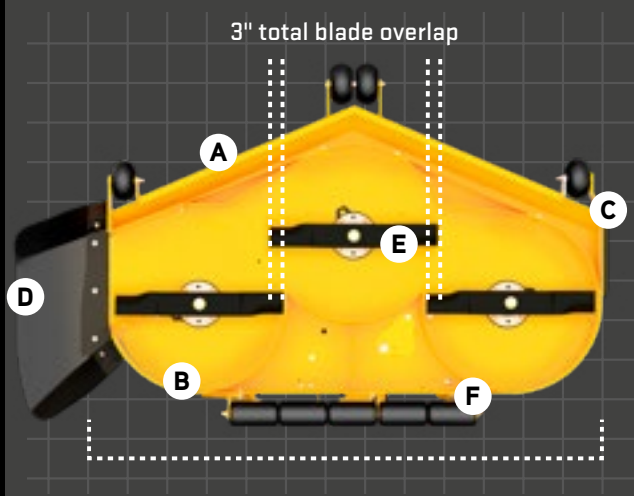

3" total blade overlap

60" - 72" deck sizes

### The Thickest, Strongest Steel Deck in the Industry

Tackle the toughest conditions with the industry's only triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements on PRO Z5 and PRO Z7.

#### DURABILITY

- A** 1/4" leading rolled edge
- B** 5/16" steel side reinforcements
- C** 3/4" wear guard

#### QUALITY CUT

- D** Flexible rubber discharge chute
- E** High-lift Marbain® blades (with blade tip speed up to 18,500 fpm)
- F** Adjustable rear striping roller (optional extra on Z1 & Z5)

### Beefed-Up Front End


Absorb the impact of rough terrain with a new front-end construction featuring a best-in-class combination of axle, hub and yoke size.



- A** 2" x 3" pivoting front axle
- B** Isolation dampening system (standard on the PRO Z7)
- C** 5" steel hubs
- D** 1/2" thick steel front yokes

## E-Coating

PRO Z mowers are protected with e-coating — a precise, multi-stage process that provides automotive-grade corrosion defense.

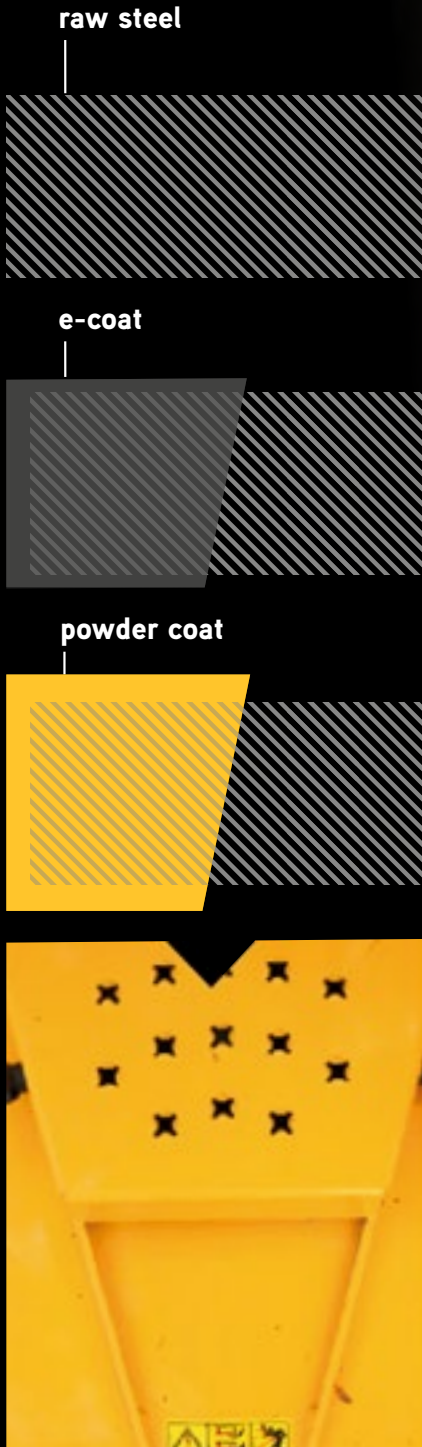

# Work hard, ride easy.

The PRO Z can take a beating, but your body shouldn't. Comfort is at the forefront of every machine's design. Your operators can experience a smooth ride all day long thanks to the cushioned and isolated dampening system on the top of the range Z7 – meaning they are working in vibration-controlled comfort, lessening downtime for your business.

Angled back adjustments, padded armrest and lumbar support give added protection across the whole range.

The PRO Z Series is specifically tailored to landscape professionals as each machine, built with ground-breaking features, delivers a strong and comfortable performance, perfect for the challenging environments faced by your business on a daily basis.



## Vibration Controlled Comfort

A cushioned and isolated dampening system provides comfort and support for hours of mowing.

- A** EVC cushion (elastic vibration control)
- B** Isolation dampening system under the seat
- C** Angle-back adjustment
- D** Padded armrests
- E** Lumbar support

(Isolated dampening system available on the PRO Z 7)

## The PRO Z Series

# Pick your productivity level.

### Powerful and ultra-economical.

Save time and money with less refuelling and lower fuel consumption with EFI technology.



- Rated power: 14.4 kW
- Max speed: up to 9.5 mph / 4.5 mph in reverse
- Seat: standard suspension
- Transmission: Hydro Gear ZT3400
- Durable rear-end construction
- Best-in-class operator visibility and controls
- Engine: Kohler Confidant EFIEZT740
- Engine displacement: 747cm<sup>3</sup>
- Fuel tank capacity: 2 x 13 litres

### Exceeds expectations. Not budgets.

Produce a commercial-quality cut with landscaper-approved speed, efficiency and comfort.



- Rated power: 14.4 kW
- Max speed: up to 9.5 mph / 4.5 mph in reverse
- Seat: standard suspension
- Transmission: Hydro Gear ZT3400
- Durable rear-end construction
- Best-in-class steering
- Engine: Kohler Confidant EFIEZT745
- Engine displacement: 747cm<sup>3</sup>
- Fuel tank capacity: 2 x 15 litres

## Cuts everything. Including downtime.

Maximise work days with efficient engines, larger fuel capacity and an industry leading commercial cutting deck.



- Rated power: 17.15 kW
- Max speed: up to 10 mph / 5 mph in reverse
- Seat: standard suspension with angle control
- Transmission: Parker 12 cc
- ▶ - Best-in-class steering with full steering wheel control
- ▶ - Best-in-class deck construction: triple-7-gauge steel
- ▶ - Best-in-class operator visibility and controls
- ▶ - Best-in-class front-end construction
- Engine: Kawasaki OHV
- Engine displacement: 852cm<sup>3</sup>
- Fuel tank capacity 2 x 34 litres

## Makes a hard day's work easy.

Step up to greater power, higher top speeds, more comfort and a larger deck.



- Rated power: 21.00 kW
- Max speed: up to 12 mph / 6 mph
- Seat: isolation dampening system with lumbar adjustments
- Transmission: Parker 14 cc
- ▶ - Best-in-class steering with full steering wheel control
- ▶ - Best-in-class deck construction: triple-7-gauge steel
- ▶ - Best-in-class operator visibility and controls
- ▶ - Best-in-class front-end construction
- Striping roller standard
- Engine: Kawasaki 999cc
- Engine displacement: 999cm<sup>3</sup>
- Fuel tank capacity 2 x 34 litres with fuel gauge

## PRO Z SERIES SPECIFICATIONS

	PRO Z1 122	PRO Z1 137
<b>MOWER DECK</b>		
Cutting Deck (inch/cm)	48" / 122 cm	54" / 137 cm
Deck Construction	Floating, fabricated 10 ga (0.135") steel	Floating, fabricated 10 ga (0.135") steel
Reinforcements (top/bottom/leading edge/side)	2 ga / 7 ga / 1/4" / 5/16"	2 ga / 11 ga / 1/4" / 1/4"
Wear Guard	3/4" trim-side	3/4" trim-side
Blades / Blade-Tip Speed (fpm)	3 high-lift Marbain® blades / 18,500 fpm	3 high-lift Marbain® blades / 18,500 fpm
Spindle Construction	Cast aluminium housing	Cast aluminium housing
Discharge Chute	High-density, impact-resistant rubber	High-density, impact-resistant rubber
Deck Lift System	Hand lever with spring assist	Hand lever with spring assist
Cutting Height Positions	15	15
Cutting Height Range (inch / cm)	1" – 5" / 26 mm – 127 mm	1" – 5" / 26 mm – 127 mm
<b>ENGINE AND DRIVE SYSTEM</b>		
Engine/Manufacturer	Kohler® Confidant EFI EZT-740	Kohler® Confidant EFI EZT-745
Rated Power	14.4 kW / 2,700 min <sup>-1</sup>	14.4 kW / 2,700 min <sup>-1</sup>
Displacement (cc)	747 cc, V-Twin dual cylinder	747 cc, V-Twin dual cylinder
Fuel Capacity	Twin 13 litre (26 litre total)	Twin 15 litre (30 litre total)
Transmission	Hydro-Gear® ZT 3400	Hydro-Gear® ZT 3400
Ground Speed (forward/reverse)	9.5 mph / 4.5 mph	9.5 mph / 4.5 mph
<b>GENERAL</b>		
PTO	Warner PTO clutch (125 ft-lb)	Warner PTO clutch (125 ft-lb)
Steering Control	Lap Bars	Steering wheel
Operator Controls	Low-profile throttle lever	Low-profile throttle lever
Additional Controls	Sealed key switch / Fingertip engagement PTO	Sealed key switch / Fingertip engagement PTO
Parking Brake	Hand-operated / Hydro-pump release	Integrated system / Foot-operated pedal
RevTEK / Cruise Control	Standard / Standard	Standard / Standard
ROPS	2" x 2" foldable 3-position with low profile	2" x 2" foldable 3-position with low profile
Rear Bumper	5/16" thick steel, standard rear hitch	5/16" thick steel, standard rear hitch
Additional Bumper Features	Pre-drilled mounts for attachments	Pre-drilled mounts for attachments
Frame	Fully welded, 12 ga channel frame	Fully welded, 12 ga channel frame
Additional Frame Features	14 ga steel reinforcements	14 ga steel reinforcements
Front Axle/Yoke	2" x 3" solid / 3/8" thick steel	2" x 3" solid / 1/2" thick steel
Front Tyres / Rear Tyres	13" x 6.5" - 6" / 23" x 10.5" - 12"	13" x 6.5" - 6" / 23" x 10.5" - 12"
Wheel Bearings	Ball bearings	Ball bearings
Seat Type	High-back suspension with seat belt, adjustable armrests and 6" seat travel	High-back suspension with seat belt, adjustable armrests and 6" seat travel
<b>DIMENSIONS</b>		
Length	80"	80"
Width (chute up/down)	49" / 61"	56" / 67"
Height (ROPS down/up)	48" / 70"	48" / 70"
Net Weight	360 kg	360 kg
LpA/LwA/LwAg (dB)	93 / 103 / 105	93 / 103 / 105
Vibration value body / K-Factor	1 / 0.5 m/s <sup>2</sup> / 5 / 1.5 m/s <sup>2</sup>	1 / 0.5 m/s <sup>2</sup> / 5 / 1.5 m/s <sup>2</sup>
<b>WARRANTY</b>		
Warranty Information	1 year commercial warranty / 3 year domestic warranty	1 year commercial warranty / 3 year domestic warranty
<b>ACCESSORIES</b>		
Deck Lift	Elec power deck lift (19B70045100)	Elec power deck lift kit (19B70045100)
Stripping Kit	Heavy-duty deck-mounted roller kit (19A70019100)	Heavy-duty deck-mounted roller kit (19A70019100)
Dozer Blade	(19B70044100)	(19B70044100)



# PRO Z SERIES SPECIFICATIONS

	PRO Z5 152	PRO Z7 183
<b>MOWER DECK</b>		
Cutting Deck (inch/cm)	60" / 152 cm	72" / 183 cm
Deck Construction	Floating, fabricated 7 ga (0.187") steel	Floating, fabricated 7 ga (0.187") steel
Reinforcements (top/bottom/leading edge/side)	7 ga / 7 ga / 1/4" / 5/16"	7 ga / 7 ga / 1/4" / 5/16"
Wear Guard	3/4" trim-side	3/4" trim-side
Blades / Blade-Tip Speed (fpm)	3 high-lift Marbain® blades / 18,500 fpm	3 high-lift Marbain® blades / 18,500 fpm
Spindle Construction	Cast aluminium housing	Cast aluminium housing
Discharge Chute	High-density, impact-resistant rubber	High-density, impact-resistant rubber
Deck Lift System	Foot pedal with spring assist	Foot pedal with spring assist
Cutting Height Positions	17	17
Cutting Height Range (inch / cm)	1" – 5" / 26 mm – 127 mm	1" – 5" / 26 mm – 127 mm
<b>ENGINE AND DRIVE SYSTEM</b>		
Engine/Manufacturer	Kawasaki® FX850v	Kawasaki® FX921v
Rated Power	17.1 kW / 2,700 min <sup>-1</sup>	21 kW / 2,750 min <sup>-1</sup>
Displacement (cc)	852 cc, V-Twin dual cylinder	999 cc, V-Twin dual cylinder
Fuel Capacity	Twin 34 litre (68 litre total) with dial gauge	Twin 34 litre (68 litre total) with electric gauge
Transmission	Parker HTJ 12 cc pump / 260 cc wheel motor	Parker HTG 14 cc pump / 280 cc wheel motor
Ground Speed (forward/reverse)	10 mph / 5 mph	12 mph / 6 mph
<b>GENERAL</b>		
PTO	Warner PTO clutch (125 ft-lb)	Warner PTO clutch (200 ft-lb) with soft start
Steering Control	Steering wheel with EPS	Steering wheel with EPS
Operator Controls	Low-profile throttle lever	Low-profile throttle lever
Additional Controls	Sealed key switch / Fingertip engagement PTO	Sealed key switch / Fingertip engagement PTO
Parking Brake	Hand-operated / Hydro-pump release	Hand-operated / Hydro-pump release
RevTEK	Standard	Standard
ROPS	2" x 2" foldable 3-position with low profile	2" x 2" foldable 3-position with low profile
Rear	5/16" thick steel, standard rear hitch	5/16" thick steel, standard rear hitch
Additional Bumper Features	Pre-drilled mounts for attachments	Pre-drilled mounts for attachments
Frame	Fully welded, 3/8" x 5" laser-cut steel	Fully welded, 3/8" x 5" laser-cut steel
Additional Frame Features	Integrated tie-down slots	Integrated tie-down slots
Front Axle/Yoke	2" x 3" solid / 1/2" thick steel	2" x 3" solid with Isolated dampening system, 1/2" thick steel
Front Tyres / Rear Tyres	15" x 6" - 6" / 24" x 12" - 12"	16" x 6.5" - 8" / 24" x 12" - 12"
Wheel Bearings	Ball bearings	Ball bearings
Seat Type	High-back dial suspension with EVC cushion, seat belt, angle-back adjust and armrests	High-back dial suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, Isolated dampening system mounted base (lateral suspension)
<b>DIMENSIONS</b>		
Length	84"	86"
Width (chute up/down)	62" / 73"	74" / 85"
Height (ROPS down/up)	48" / 74"	48" / 74"
Net Weight	680 kg	732 kg
LpA/LwA/LwAg (dB)	93 / 103 / 105	93 / 103 / 105
Vibration value body / hand / K-Factor	1 / 0.5 m/s <sup>2</sup> / 5 / 1.5 m/s <sup>2</sup>	1 / 0.5 m/s <sup>2</sup> / 5 / 1.5 m/s <sup>2</sup>
<b>WARRANTY</b>		
Warranty Information	1 year commercial warranty / 3 year domestic warranty	1 year commercial warranty / 3 year domestic warranty
<b>ACCESSORIES</b>		
Deck Lift	Elec power deck lift kit (59A30050150)	Elec power deck lift kit (59A30050150)
Striping Kit	Heavy-duty deck-mounted roller kit (59A30052150)	Standard
Dozer Blade	59B30036150	59B30036150

## PRO SERIES ACCESSORIES



### SNOW CHAINS

Snow chains for PRO Z1

0 037049 945603  
Mod. No.: 490-241-0026

Snow chains for PRO Z5 and PRO Z7

0 037049 951123  
Mod. No.: 490-241-0036



### DOZER BLADE

Dozer blade for PRO Z1

4 008423 881172  
Mod. No.: 19B70044100

Dozer blade for PRO Z5 and PRO Z7

0 043033 580255  
Mod. No.: 59B30036150




### ELECTRIC DECK LIFT KIT

Electric deck lift for PRO Z1

4 008423 881189  
Mod. No.: 19B70045100

Electric deck lift PRO Z5 and PRO Z7

0 043033 576340  
Mod. No.: 59A30050150

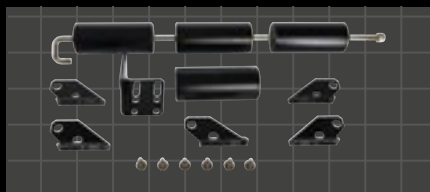

### HEAVY DUTY LAWN STRIPING KIT

Heavy duty lawn striping kit for PRO Z1

0 043033 542109  
Mod. No.: 19A70019100



Heavy duty lawn roller kit for PRO Z5

0 889021 121587  
Mod. No.: 59A30052150

# **CUB CADET: BUILT IN AMERICA SINCE 1961**

**Cub Cadet products are thoughtfully designed around people who depend on us – at home, or on the job out in the elements. And we're proud to say we've built them in America since 1961.**

**Today, we're building our products and strengthening work forces and local communities in Ohio, Kentucky, Tennessee and Mississippi. In each of our manufacturing plants across the country, you'll always find the spirit of Cub Cadet hard work, commitment and a passion for quality.**



**BUILT USING THE HIGHEST QUALITY COMPONENTS  
SOURCED LOCALLY AND GLOBALLY**

# WARRANTY

Cub Cadet offers a three year domestic user warranty across the entire range of garden machinery except robotic mowers. This is great news for both customers and dealers, inspiring confidence in the quality and reliability of Cub Cadet products. Details of terms and conditions can be found at [www.cubcadet.co.uk](http://www.cubcadet.co.uk).



Issue 1/2020

Text and photographs, specifications of dimensions and performance are composed with greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only. Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the vehicle itself for more details.

Cub Cadet Division of E. P. Barrus Ltd, Glen Way,  
Launton Road, Bicester, Oxfordshire. OX26 4UR.  
Tel: 01869 363658 Fax: 08714 290936



CubCadet\_uk



@CubCadet\_uk

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)