
LITTLE WONDER®

GET PROVEN RESULTS. GET LITTLE WONDER.



Landscaping & Debris Management EQUIPMENT CATALOG



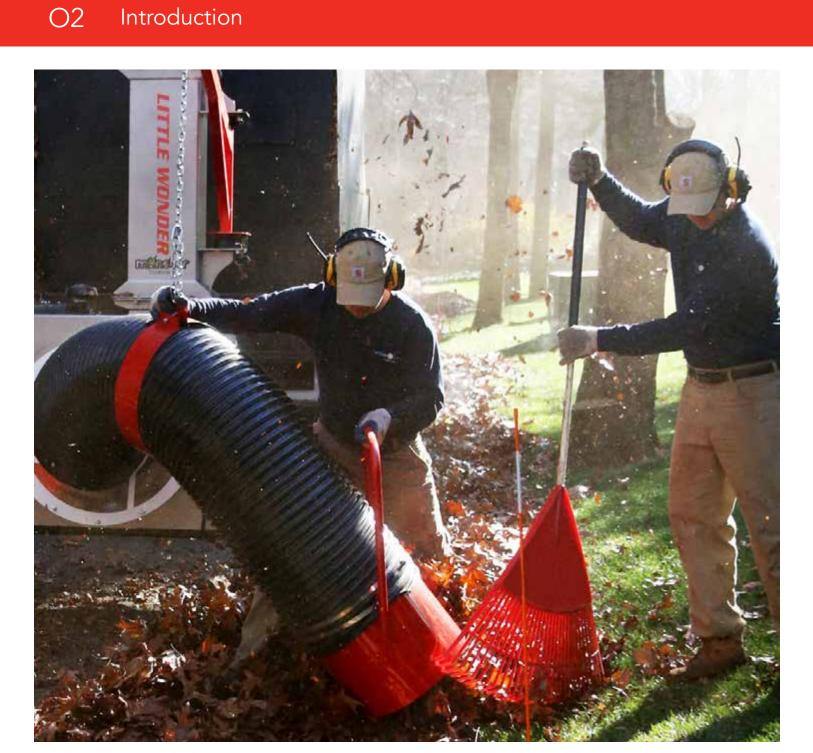





We're Little Wonder,

and we've commanded attention in the green industry for more than 95 years. Our hand-cranked hedge trimmer made headlines in 1922 as the first of its kind. Today, alongside our legendary trimmer, we design and develop the most trusted landscaping and debris management equipment. In fact, we offer more debris management products than any other manufacturer in this category, including our famous line of Optimax walk-behind blowers and industry leading TruckLoaders. We know how to use air power to move and collect debris better than anyone else. But enough about us. Let's talk about you.

As a professional landscaper, paving contractor or a dedicated DIY homeowner, you demand quality, convenience and durability. You put in long hours and expect your equipment to do the same. If your blower, vacuum and truckloader can't perform the toughest of jobs—be it clearing, trimming, hauling and/or dumping—they are not worth your time or investment, right? We understand completely and engineer our powerful equipment to stand up to your needs, season after season.

So please, browse our equipment catalog, create your wish list and visit littlewonder.com to locate a dealer or rental shop near you. Then,

put us to work for you.



MORE AIR POWER. LESS MAN POWER.

Optimax[™] Blowers

Little Wonder Optimax[™] maximum output blowers are perfect for moving leaves, debris and standing water—or for any job that requires hurricane-force air. All models feature a split-stream air deflector, which minimizes "blow-back", and adjustable, ergonomic handles with anti-vibration grip for operator comfort. Add a transport bracket for convenient tie-down and an industry-leading 5-year warranty, and you'll see why Optimax is the only blower you need. Available in a variety of push and self-propelled models (LB270H-SP shown at right).



We offer more debris management products than any other manufacturer.

PUSH / SELF-PROPELLED (SP)

Model	160H	LB270H LB270H-SP	LB270K	LB390H LB390H-SP	LB570V LB570V-SP
Product No.	9160-02-01	9270-02-01	9270-06-01	9390-02-01	9570-04-01
Troduct No.	0100 02 01	9270-12-01	0270 00 01	9390-12-01	9570-14-01
Variable Speed Forward	n/a		0 - 4.1 mp	h (SP only)	
Variable Speed Reverse	n/a		0 - 2.5 mp	h (SP only)	
Transmission	n/a	Variable Spee	d Belt-powered Chain Dr	ive, Open Center Differ	ential (SP only)
Engine	Honda® GC160	Honda® GX270	Kohler® Command PRO® CH395	Honda® GX390	Briggs & Stratton® Vanguard™
Displacement	163cc	270cc	277cc	389cc	570cc
Fuel Capacity	.83 gal.	1.4 gal.	1.85 gal.	1.6 gal.	1.75 gal.
Impeller (diameter, type)	17", 7-Blade Steel, Reverse Angle		17", 9-Blade Steel, Reverse Angle		
Discharge Chute Area	14.9 sq. in.		25.8 9	sq. in.	
Air Volume	1397 cfm	2260 cfm 2530 cfm		2850 cfm	
Air Speed*	153 mph	143 mph 160 mph		179 mph	
Integrated Front / Side Discharge	Yes				
Air Flow Control	Manual		Ren	note	
Front Tires		10)" Pneumatic Tires w/ Tu	be	
Rear Tires	10" Pneumatic Tires w/ Tube	12" Pneumatic Tires w/ Tube 13" Pneumatic Turf Tread Tires w/ Tube			
Handle	Ergonomic 2-position Adjustable; Anti-vibration Grip				
Housing	Continuously-welded Steel; 1 Piece Engine Deck				
Dimensions (H, W, L)	42" x 28" x 56"	43" x 28" x 58"			
Weight	108 lbs.	142 lbs 202 lbs.	148 lbs.	168 lbs. 228 lbs.	188 lbs. 248 lbs.

farther and faster

to go over the area once.

without blow-back. You'll only have

Blower of choice for asphalt and paving industry.


Powerful 7- or 9blade fan and steel impeller produces high airflow while the scrolled housing allows uninterrupted air intake. Even if a portion of the housing is covered with leaves and debris, airflow can still enter the impeller area and be forced out the discharge chute.

Durable, heavy gauge all-steel housing for strength and durability. Large discharge for optimum air flow.

Curved aerodynamic inlet draws air in smoothly for constant power and helps avoid clogging even if leaves are sucked in.

> Convenient lift handle makes lifting the blower on and off the truck easier.

Strong, ergonomic adjustable handle with anti-vibration grip for added comfort.

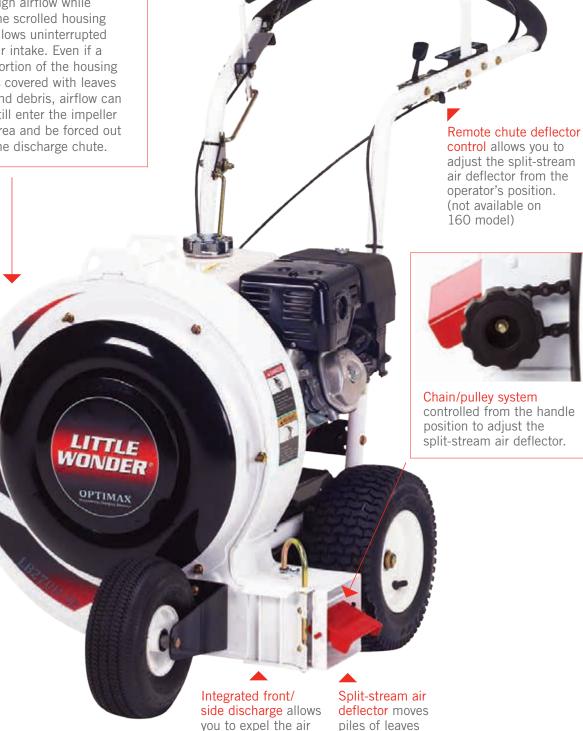

from the front of the unit or out the side

without tools.

5-YEAR WARRANTY

Engines are warranted separately by manufacturer.



PARKING BRAKE

Secure transport and reduce roll-offs with the Little Wonder parking brake.

The optional parking brake attaches to the main deck of the blower and secures BOTH wheels - enhancing stability on hills and in the back of a truck. It is easily engaged and disengaged by foot.

Item Number	4174094	
Kit Weight	6 lbs.	
Material	Steel	
Finish	Black powder coat	
Diameter	10.5 in.	
Adjustment Dual action spring, positionin done by foot		
Usage	Works on Optimax Push models only except 9160-02-01	



SOLID FRONT WHEEL

The solid wheel adds durability, which is of particular importance when the blower is used over tough and abrasive terrain. The optional solid wheel attaches quickly using the hardware already available on the Optimax blowers.

Item Number	4173815
Kit Weight	10 lbs.
Material	Rubber
Diameter	10.5 in.
Wheel Bearing	Pressed-fit ball bearing
Usage	Works on all Optimax blowers



SWIVEL WHEEL KIT

Optional, easy to install, Swivel Wheel Kit for 360° turning and control. Wheel can also lock into a straight position. Minimizes wear and tear on tires.

Item Number	9050
Kit Weight	15 lbs.
Material	Steel
Finish	Black Powder Coat
Usage	Works on all Optimax blowers except for 9570



TOOL HOLDER

The optional tool holder attaches to either side of a blower and can hold either a shovel or a broom. Two tool holders can be added for maximum productivity.

Item Number	4174355
Kit Weight	2 lbs.
Material	12-gauge steel
Finish	Red powder coat
Usage	Works on all Optimax blowers



GOODBYE, BACKPACK. HELLO, PRODUCTIVITY.

C5 Blower

The Little Wonder C5 Blower puts 200 mph and 1100 cfm of air power in the hands of consumers everywhere. That's more than twice the air power of many comparably priced backpack blowers—without the backpack backache. Quick and easy to use, this professional-grade machine can tackle a multitude of chores around your property. Simply wheel it over and get to work.

- Clean up yards, curb areas and driveways
- Clear debris from flower beds, hedges and fence lines
- Blow away grass and hedge clippings as well as debris from under porches and decks
- Clear sewage grates and street run-off gutters
- Clean out cracks and crevices to repair cement
- Move standing water, light snow and, of course, mountains of leaves—even the wet, heavy ones

Product No.	99170-06-01
Engine	Kohler® SH265
Engine Displacement	196cc
Fuel Capacity	0.95 gal.
Air Filter Material	Urethane Foam
Throttle Control	Manual Adjustment / Infinite Position
Velocity	200 mph
CFM	1,100
Fan	16" Composite
Push/SP	Push
Discharge Chute	3.5"
Chute Adjustment	Multiple Position, Tool- less Adjustment
Handle	Foam Grip, Foldable
Handle Positions	Multiple. Tool-free Interlocking Teeth
Foam Grip	Yes
Front Wheel Size	10" x 2.75" Flat-free
Rear Wheel Size	16" x 2.75" Flat-free
Wheel Bearing	Ball Bearing (front & rear)
Unit Dimensions	36" x 27" x 31"
Weight	102 lbs.



2-YEAR RESIDENTIAL / 90-DAY COMMERCIAL WARRANTY

SUPERIOR SUCTION MAKES CLEAN-UP A SNAP.

Pro Vac Debris Vacuums

Be it bulky bottles, crushed cans, leaves, pine needles or pea-sized gravel, the Little Wonder Pro Vac doesn't discriminate. Our industry-leading impeller housing design funnels airflow and debris of all sizes into our top-loading, 74.5-gallon capacity bag without loss of suction. So you can collect more debris per bag and spend less time emptying it. The Pro Vac is excellent for residential cleanup, industrial applications, commercial sites and parking lots and is available in push and self-propelled (shown at right).

Simply the best at everything that matters to you.

Power

Maneuverability

Speed

- Durability
- Bag capacity
- Comfort

Suction

Value

Model	Pro Vac	Pro Vac SP	
Product No.	5612-00-01	5612-12-01	
Engine	Briggs & Stratton® Vanguard™	Honda® GX270	
Engine Displacement / HP	6.5HP*	270cc / 9HP	
Fuel Capacity	3.4 qts.	6.4 qts.	
Bag Design	Top Filling, 26" Diame	eter, Single Lever Release	
Bag Capacity	8 Bushel / 7	'4.47 gal. (US)	
Impeller	16 3/4" dia., 5 blades, 1/4" thick		
Transmission	n/a	Hydrostatic, Hydro-Gear® T2	
Speed (Forward / Reverse)	n/a	0-4.2 mph / 0-1.8 mph	
Drive Wheels	12" Pneumatic Rear	13" Turf Tread Tires - Rear	
Front Wheels	10" Pneumatic Front	Heavy-duty Casters Standard - Front	
Weight	184 lbs.	280 lbs.	
Dimensions (L, W, H)	62" / 29" / 40"	72" / 29" / 40"	
Nozzle Type / Width	Height Adjustable, Floating / 29"		
Optional Hose	12'		

^{*}All power levels are stated gross horsepower per SAEJ1940 as rated by Briggs & Stratton.



We offer more debris management products than any other manufacturer.









BAD NEWS FOR DEBRIS.

Pro Vac SI Debris Vacuums

The Pro Vac SI delivers the suction power to clear litter and debris faster. Serrated Steel Impeller Blade Technology with up to a 5:1 reduction ratio delivers superior suction and shredding capabilities in a compact footprint. Keep your pace going with instant easy nozzle height adjustment from the operator's position. You'll get non-stop, efficient pavement-to-turf transition for faster parking lot and leaf cleanup. Throated nozzle design increases airspeed for improved vacuum capability. Unique rectangular discharge chute prevents debris clogs. The optimized 40-gallon, no-kick bag design prevents wear and tear. The Optional Hose Kit for cleaning out flower beds and hard to reach areas, seats securely in a special contoured pocket that blocks air flow when not in use.

Power. Performance. Capacity.

Model	5511-02-01	5511-04-01	
Engine	Honda® GSV190	Briggs & Stratton® Professional Series™ 850	
Engine Displacement	187cc	190cc	
Fuel Capacity	0.25 gallon	0.26 gallon	
Impeller	12" dia., 5 bla	des, 1/4" thick	
Blade Design	Serrated teethed steel		
Bag Design	Mesh w/ dust skirt (Optional Felt Bag)		
Bag Capacity	40 gal (US)		
Nozzle Type	Fixed		
Nozzle Width	27.5"		
Wheels	12" rubber tread cap wheels		
Hose (Optional)	5" diameter, 7' long		
Dimensions	57.5" L x 27" W x 43.5" H		
Weight	146 lbs.	146 lbs.	









BIG BITE. EVEN BIGGER PROFITS.

Skid & Tow-Behind TruckLoaders

Little Wonder Monster TruckLoaders are all bite, attacking debris with ease. These monstrous machines allow you to fit more in the truck and clear more properties between offloads for higher productivity and more profit.





FEATURES

- 14HP Kohler® Command PRO® CH440 engine
- 5/16" thick 16" diameter steel teethed impeller
- 2803 cfm
- Tool-free 360-degree discharge chute adjustment
- 8" x 10' Flexible urethane intake hose increases volume
- Polymer discharge chute (with liner) (7" x 30")

Mounting Options:

Skid (standard)

Optional: Hitch, Swing-Away or Tailgate



18 HP

FEATURES

- 18HP Briggs & Stratton®
 Vanguard™ engine / electric start
- 3/8" thick 20" diameter steel teethed impeller
- 3510 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 10" x 10' Flexible urethane intake hose increases volume
- 7" x 36" Flex-Tube discharge chute

Mounting Options:

Skid or Swing-Away Hitch Optional: Rotary or Hitch







29

FEATURES

- 3/8" thick 20" di teethed impeller
- 4710 cfm
- Stack gaskets sea lock in debris mo
- 12" x 10' Flexible hose increases vo
- Flex-Tube dischar

Mounting Options:

Skid or Tow-Behind



What makes a Little Wonder Monster TruckLoader a real beast? A four blade steel impeller with shredding teeth on all three debris touch points provides the best shredding ratio in the industry—UP TO A MONSTROUS 15 to 1.





tratton[®] e / electric start ameter steel

I in airflow and sture

urethane intake lume

ge chute (8" x 5')



35 HP

FEATURES

- 35HP Briggs & Stratton®
 Vanguard™ engine / electric start
- 1/2" thick 25" diameter steel teethed impeller
- 6950 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 16" x 10' Flexible urethane intake hose increases volume
- Metal discharge chute (12" x 6')

Mounting Options:

Skid or Tow-Behind



36 HP

FEATURES

- 36hp Diesel model coming in 2019
- 1/2" thick 25" diameter steel teethed impeller
- 7450 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 16" x 10' Flexible urethane intake hose increases volume
- Metal discharge chute (12" x 6')

Mounting Options:

Skid or Tow-Behind



BIG BITE. BIG BELLIES.

Self-Contained TruckLoaders

Little Wonder Monster Self-Contained TruckLoaders are an all-in-one leaf collection system that includes a truck loader, large capacity dump container and trailer. It's an entire towable leaf collection and dump system you tow with your work truck.

5-Yard Gravity Dump Self-Contained TruckLoader

FEATURES

- 65° Fixed dump bed angle allows gravity to help offload materials
- Double barn doors (rear) w/sidewall door latches secure doors when open for offloading
- Removable roof screens
- 29HP B&S Vanguard[™] engine

Removable

Loadstar 700 15" radial tires





Dual barn doors

10-Yard Hydraulic Lift Self-Contained TruckLoader

FEATURES

- Hydraulic lift, 50° angle dump
- Removable upper walls is like having two dump trailers in one!
 - Full dump box (5'H) hauls 10 yards of lightweight bulky debris
 - Half dump box (2'H) allows you to tote and dump up to 10,000 lb. (5 tons) of heavier materials like salt, top soil or gravel.
- Easy hitch-and-go system, 2-5/16" ball coupler road ready trailer (Pintel eye optional).
- Choice of 35HP Briggs & Stratton®
 Vanguard™ gas or 36HP diesel engine option coming in 2019



Hydraulic lift, 50° angle dump



Removable top walls to haul up to 5 tons

TruckLoaders



Skid & Tow-Behind TruckLoaders

Model No.	8143-06-01	8183-04-01	8293-04-01	8353-04-01	Option coming in	
		8184-04-01	8295-04-01	8355-04-01	2019	
Engine	Kohler® Command PRO® CH440	B&S V	/anguard™		Diesel	
Displacement*	14HP	18HP	29HP	35HP	36HP	
Marria	Skid (standard)	Skid Mount	Skid Mount			
Mount	(Optional Hitch, Swing-Away and Tailgate)	Swing-Away	Tow Behind			
Hitch Class	Class III or IV Hitch Required for 2"	Class III Hitch Required for 2"	Class III Hitch	Required for 2"	Square Receiver	
Requirements	Square Receiver	Square Receiver (Skid Mount)	2-5/16 Ball Hitch	Required for Opt	tional Trailer Mount	
Starter	Pull	Electric / Pull		Electric		
Fuel System	1.85 gal.	1.5 gal.	6 gal.	7	gal.	
Fuel Type		Gas			Diesel	
Battery	N/A	12V		12V	12V	
Impeller	16" Dia., 4 - 5/16" Teethed Steel Blades	20" dia., 4 - 3/8" Teethed Steel Blades		25" dia., 4 - 1/2" Teethed Steel Blades		
CFM	2803	3510	4710	6950	7450	
Housing Liners	440 Belt	3/16" Steel	1/4" Steel	1/4	" Steel	
Intake Hose	8" x 10'	10" x 10'	12" x 10'	16	" x 10'	
Discharge	Polymer 7" x 30"	Flex-Tube 7" x 36"	Flex-Tube 8" x 5'	Meta	l 12" x 6'	
A. I. / C	D1/0		N/A		N/A	
Axle / Suspension N/A			Torflex® 2000 lb.	Torflex® 3500 lb.		
Time / M/least	NI/A			N/A		
Tire / Wheel N/A				ST205 / 75 D15		
Dry Woight	225 lbs.	460 lbs.	727 lbs.	1155 lbs.	2090 lbs.	
Dry Weight	ZZ3 IDS.	580 lbs.	1090 lbs.	1555 lbs.	2090 IDS.	

Self-Contained TruckLoaders

Model No.	82965-04-01	83560-04-01	Option coming in 2019
Engine	B&S Vanguard™	B&S Vanguard™	Diesel
Displacement*	29HP	35HP	36HP
Mount	5-Yard Gravity Dump Trailer	10-Yard Hydraul	ic Dump Trailer
Hitch Class Requirements	2-5/16" Ball Coupler (Pintel eye optional) w/1500 lb. dual wheel jack	2-5/16" Ball Coupler (Pintel eye optional) w/8000 lb. jack drop leg	
Starter		Electric	
Fuel Capacity	6 Gallon	7 Ga	llon
Fuel Type/System	Gas	Gas	Diesel w/gauge
Battery	12V	12V / 525CCA	12V / 675CCA
Impeller	20" dia. Impeller with 4 - 3/8" Teethed Steel Blades	25" dia. Impeller with 4 - 1/2" Teethed Steel Blades	
CFM	4712	6951	7450
Intake Hose	12" x 10'	16" x	10'
Discharge	Metal 8" x 5'	Metal 12" x 6'	
Axle	3500 lb. Torflex® 6000 lb. Dual D60 Dexter E-Z Lube		Dexter E-Z Lube®
Suspension	3500 lb. Torflex®	Leaf slipper spring	
Tire/Wheel	(2) 2400 lb. Loadstar 700 15" radial 6-lug with 5.5" bolt pattern		
Dry Weight	2210 lbs.	5400 lbs.	5700 lbs.
Container Dimensions	5' x 8' x 6' bed	Full dump box 6' x 9' x 5' -	Half dump box 6' x 9' x 2'
Container Dump Angle	65° Fixed dump bed	50° Hydraulic lift w/re	movable upper walls.
Container Doors	Double barn doors (rear) w/sidewall door latches	Two-way lower tailgate. To	op hinged upper tailgate
Container Hydraulics	N / A	12-volt two-way hydraulic pu	ump w/push button controls
Overall Dimensions	7' W x 15' L	8' W x 19' L	
Unit Weight (GVW)	3500 lbs. gross vehicle weight	10,000 lbs. gros	s vehicle weight



Swing Away Hitch (available for 14HP & 18HP only)



Rotary Arm Mount (available for 18HP Skid Mount)



Safety Kit available for all trailer units.



LED Light Kit available for all models.

MOUNT ACCESSORIES

Item No.	Models	Description
720060	14HP	Hitch Mount for 14HP Skid Mount
720062	14HP	Hitch Mount Swing Arm
720061	14HP	Heavy-Duty Tailgate
MP02001.17	18HP	Rotary Arm Mount for 18HP Skid Mount
MP02002.17	18HP	Hitch Mount for 18HP Skid Mount
MP020060.17	18HP	Hitch Mount Swing Arm

KITS

Product No.	Tow-Behind Models	Description
MP010012	All Models	Safety Kit (2 Orange Cones w/bracket and Wheel Chocks w/ Storage Box)
MP010032		LED Light Kit (2 LED Lights w/bracket and Wiring Harness)







CUT BRUSH NOT CORNERS.

Hydro Brush Cutter

The Little Wonder Hydro Brush Cutter navigates through weeds, heavy brush and overgrown vegetation with ease. Our tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick. Our welded steel frame design and engine positioning provide excellent balance regardless the terrain. And, unlike the competition, our hydrostatic transmission offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse. So you can cut your own path at your own pace.

- Clear small areas, vacant lots, around barns or buildings
- Clear hilly terrain
- Establish small trails or paths
- Open riding trails

- Clear around ponds
- Perform highway guard rail maintenance
- Clear tinder brush and cut firebreaks in forest area



Product Description	Hydro BRC-26 Honda®		
Engine	Honda® GXV390		
Displacement	390cc		
Fuel Capacity	2.2 qts. (2.1 Liters)		
Transmission	Hydro-Gear® T2® Transaxle		
Transmission Type	Integrated Hydrostatic Pump / Motor		
Axle	.75" Solid Steel		
Park Brake	Standard		
Differential Lock	Open		
Ground Speed - Forward	Infinitely-variable, 0-4.2 mph		
Ground Speed - Reverse	Infinitely-variable, 0-1.7 mph		
Cutting Blade	26" (.25" Thick)		
Spindle / Bearings	1" Diameter / Dual Sealed Ball Bearings		
Overall Width	30" (32" at the Handles)		
Cut Height / Capacity	3" - 5"/ Saplings up to 2" diameter		
Tires	16 x 4.8-8 Puncture-proof, Bar Tread, Foam-filled		
Unit Weight	405 lbs.		

^{*}All power levels are stated gross horsepower per SAEJ1940 as rated by Briggs & Stratton.



We offer more debris management products than any other manufacturer.









CLEAN, SHARP EDGES. NO SHOVEL NEEDED.

Optional shredder kit and weight kit available.

BedShaper®

Ready for edging made easy? Put down the shovel, and pick up the Little Wonder BedShaper[®]. This popular unit features a powerful "concave shape" notched blade to slice through soil, producing clean, sharp edges—even "S" curves—at up to 100' per minute. Blades are lifetime guaranteed against chipping, breaking, bending and delaminating.

Product No.	904-00-01
Engine	Honda® GXV390
Displacement	390cc
Transmission	Hydrostatic, Infinite Speed Control (forward and reverse)
Blade	16.25" dia., Heat Treated Spring Steel
Bearings	Roller (greaseable)
Frame	Welded, Formed Steel
Cutting Depth	.5" - 4.5"
Depth Adjustment	Pin, 7 Position
Tire Size	145 / 70 - 6
Dimensions (W, L, H)	43" x 51" x 43"
Weight	360 lbs.



Optional bolt-on Shredder Blades Kit Item 80001

When the notched blade contacts a rock or tree root, the BladeFloat™ allows the arm to "float" over the

obstruction while the blade continues

to cut.



fully enclosed in the frame.

Spring-loaded belt idler provides

maintenance free operation and is

CLEARING THE WAY TO A QUALITY FINISH.

Pro Crack Cleaner

The Little Wonder Pro Crack Cleaner is specially designed to clean cracks and crevices in asphalt and concrete surfaces, saving you time and allowing for a longer lasting crack fill and sealant application. Available with a Honda® GX120 engine featuring better fuel economy and rated for up to 2000 hours.

Product No.	6236-00-01	
Engine	Honda® GX120	
Displacement	118cc	
Handles	Anti-Vibration Grips	
Cast Iron Cutter Head	Fixed	
Drive Belt	Dual Belts	
Wire Wheel	Heavy-Duty 9" dia. Spring Steel Twisted Wire	
Fuel Capacity	3 qts.	
Weight	77 lbs.	





Heavy-duty 9" diameter twisted wire wheel brush ideal for cleaning out expansion joints and cracks in asphalt or cement.

EDGING OUT THE COMPETITION.

Pro Edger

Designed to produce clean, crisp edges quickly and efficiently—up to 90' per minute—the Little Wonder Pro Edger outperforms all others in the category. This user-friendly unit features fingertip controls for fatigue-free operation and control, making it the edger of choice among landscapers and DIYers.

Product No.	6033-00-01	6232-00-01	
Engine	Briggs Intek Series 550	Honda® GX120	
Displacement	127cc	118cc	
Handles	Anti-Vibration Grips		
Cast Iron Cutter Head	Fixed		
Drive Belt	Dual Belts		
Edging Depth	Up to 4"		
Fuel Capacity	2.25 qts.	3 qts.	
Weight	65 lbs.	69 lbs.	
·	· ·	·	



PRO CRACK CLEANER AND PRO EDGER BOTH FEATURE:

- Convenient controls that allow adjustment of cutting depth (up to 4"), belt tension and blade engagement from the operator's position.
- Dual belt drive for extra power to the blade and reduced slippage during application.
- Four wheel design for extra stability. All wheels have steel hubs with ball bearings and full axles for smoother and easier maneuverability.

- Largest available cast iron cutter head on the market.
- 10" steel blade is sharpened on all four sides for longer blade life.

THE FIRST OF ITS KIND AND STILL THE BEST OF ITS KIND.

Hedge Trimmers

Little Wonder Hedge Trimmers have been the top choice of landscaping professionals since the first hand-cranked Little Wonder was built in 1922. We produced the world's first electric-powered hedge trimmer in 1940, followed by the world's first gasoline-powered unit in 1955. Our blades last 6 to 10 times longer and require less sharpening than blades typically found on lower-priced, homeowner-grade hedge trimmers. That means you can power through heavy growth and delicately sculpt shrubs without losing your edge.

- Stamped, thru-hardened high carbon tool steel blades maintain a sharp edge for longer periods of time, which means less downtime for maintenance.
- Double reciprocating blades allow for reduced vibration and heavier cuts.
- Hand-sharpened blades cut growth up to 1/2" 1" in diameter.

GAS HEDGE TRIMMERS

Models	Single Edge
Product No.	2230\$-00-01
Blade Length	30"
Weight	12.25 lbs.
Blade Speed	3500 Cuts Per Minute
Cutting Capacity	Up to 1" Thick
Engine	21.2cc, 2-Cycle Commercial Grade Engine
Fuel Capacity	13.57 oz.


ELECTRIC HEDGE TRIMMERS

Models	Single Edge Double Ed		
Product No.	2410-00-01	3010-00-01	2420-00-01
Blade Length	24"	30"	24"
Blade Speed	2700 Cuts Per Minute		
Volts	110		
Amps	4.5		
Watts	462.33		
Weight	7.9 lbs.	8.4 lbs.	8.8 lbs.
Cutting Capacity	Up to 1/2" Thick		





Engineered to be a cut above the rest.

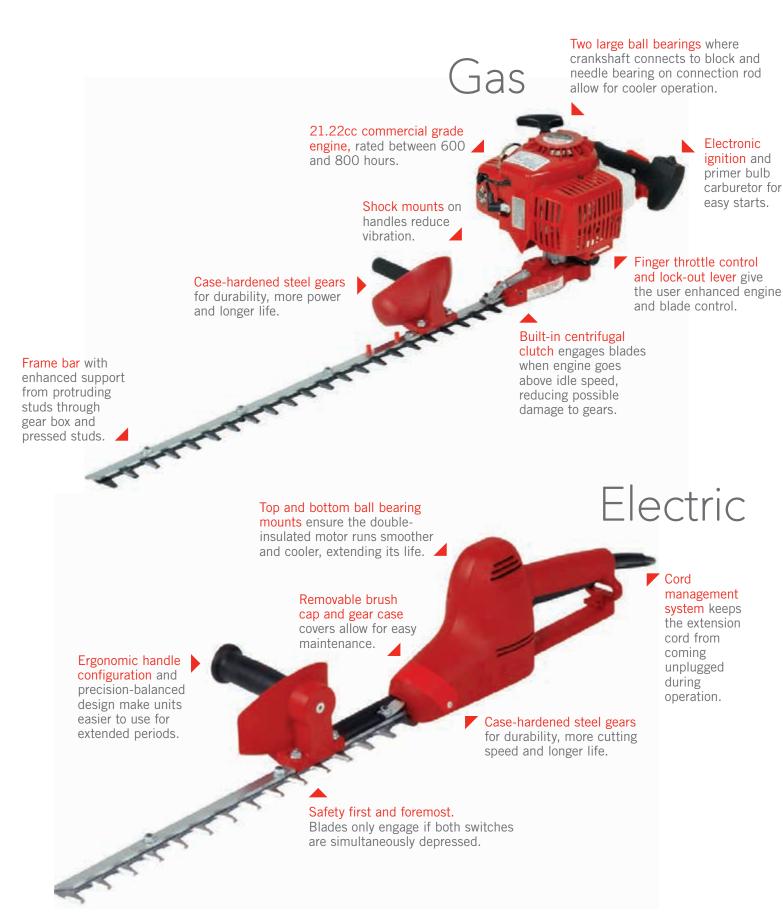

2-YEAR WARRANTY (ELECTRIC)
5-YEAR WARRANTY (GAS)

Engines are warranted separately by manufacturer.



Since 1922, professionals have relied upon the performance and long lasting durability of Little Wonder landscaping and debris management equipment.

From the production of the world's first hedge trimmer to the aerodynamic redesign of the wheeled blower, we've been changing the product landscape of power equipment for more than 95 years. Our complete line of landscaping and debris management equipment—including bedshapers, blowers, edgers, hedge trimmers, lawn and debris vacuums and truckloaders—is available through more than 3,500 power equipment dealerships nationwide. Did we mention we offer more debris management products than any other manufacturer in this category? Just making sure.

To learn more about Little Wonder products and locate a dealer or rental shop in your area, visit littlewonder.com.





1028 Street Road Southampton, PA 18966 Phone: 215-357-5110 Fax: 215-357-8045 Toll Free: 1-877-596-6337

littlewonder.com

f /LittleWonderEquipment

► /LittleWonderPower

O @LittleWonderEquipment