



MORE POWER TO YOU


We know what our customers expect from their gardening equipment; power, performance, endurance and durability. That's why we strive for every Cub Cadet product to be the best in class.

We continuously endeavour to further improve our product ranges, by incorporating new and proven technologies, implementing innovative engineering solutions and offering service solutions and accessory ranges that deliver true advantages.

With constantly higher quality standards and power, we ensure you get the ultimate user experience. Power you can rely on again and again.

"OUR CUSTOMERS GIVE US EXCELLENT FEEDBACK ON CUB CADET MACHINES. WE ARE TRULY PROUD TO HAVE BEEN A TRADING PARTNER OF THIS GREAT **BRAND HERE IN THE SOUTH OF ENGLAND SINCE 1985."**

> STEVE CANN & JILL VICKERY CUB CADET DEALER | GEORGE CANN GARDEN MACHINERY LTD. | BRAMDEAN | UNITED KINGDOM

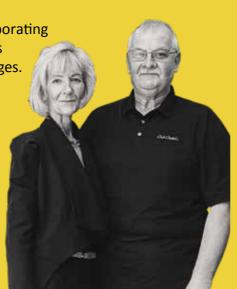

CHAMPIONS -**INSPIRED BY AMERICAN INGENUITY**

Is it the power? The endurance? Or simply the fact, that you are ready for every challenge? There are many things that make Cub Cadet a true champion - and they all have one thing in common; a revolutionary garden tractor introduced to the US in the 1960s.

Back then a true milestone, and to this day a historic benchmark with regards to our standards and values; we continuously strive to exceed the high demands of our customers. With a mix of innovative engineering and user-friendly design, we want to inspire professionals, semi-professionals and ambitious outdoor enthusiasts alike. By creating innovative machines that are built for maximum efficiency, ease-of-use and maximum comfort.

That is what makes us proud - and turns you into a true champion.

Cub Cadet is also proud to be a long-standing sponsor of William Fox-Pitt MBE, one of the most successful three-day event riders ever, who uses the Cub Cadet range, including the new 60V range to keep his Dorset yard well groomed. Fox-Pitt has been world number one four times and is eleven-times British number one.

Cub Cadet



2022

of X76

zero-turn

OUR HISTORY KEEPS US GOING

garden tractor hits the market NTERNATIONAL

1st Cub Cadet


1963 1st shaft drive model

garden tractor

1st twin cylinder



1966





Breaking new ground

in cut quality

1st lawn tractor



500 Series lawn tractors -Made in Germany



2011

50th anniversary

celebration with



2014

the innovative

2015 MySpeed -The innovative

Introduction of the PRO SERIES -

zero-turns

Introduction of the XT ENDURO SERIES

XR ENDURO SERIES

robotic mowers

XT2 E-lawn tractor

2021

the XZ7 zero-turn

XZ5 zero-turn series XR5 robotic mowers





2021 Introduction of the PRO Z9 zero-turn



INTRODUCING THE XR5



Whatever the size or shape of your garden, we understand that it is your pride and joy. That's why the Cub Cadet XR5 robotic mower has been designed to cut your lawn just like you would – with absolute precision.

From tackling uneven lawns to long grass and intricate edges, no lawn is too difficult for the XR5.

The two new models, the XR5 3000 and 4000 are suitable for very large areas thanks to their double mowing deck that offers a staggering 42cm cutting width.

Read more on page 77.

FORWARD



The new models in the XZ6 Ultima series will give you unmatched steering capabilities in challenging terrains. Industry-leading SynchroSteer® technology for full control of the front wheels, combined with powerful Cub Cadet and Kawasaki engines makes the XZ6 Ultima series the ideal machines for large lawn maintenance.

Read more on page 97.





The new top of the range models in the XZ7 Ultima series make an even greater impression with their improved stability and durability. You can mow easily in maximum comfort, even under the most difficult conditions.

The latest steering lever lap bar technology combined with the extremely robust construction of heavy-duty components and high-performance engine makes the XZ7

Ultima series the ideal machines for large lawn maintenance.

Read more on page 99.



PRO Z SERIES

The new Z9 183id is a commercial zero-turn mower with extremely wide double wheels – developed to effortlessly tackle even the steepest slopes, up to 25° / 46%.

The Z9 has an extremely robust and multi-reinforced steel cutting deck, outstanding mowing performance and air-cushioned seat for comfortable mowing all day long. Ideal for commercial users and owners of large properties with challenging terrain, the Z9 will deliver a quality cut time and time again.

Read more on page 121.





THE CUB CADET PRODUCT SERIES FOR 2022

EXCEED YOUR EXPECTATIONS

At Cub Cadet we are continually improving our product to meet the expectations and requirements of

Our FORCE SERIES models are suited to ambitious gardeners, the ENDURO SERIES™ fit the bill for expert users and our PRO SERIES is ideal for professionals.

These categories are designed to help you find the perfect machine for your needs.



LAWNMOWERS



MINI-RIDERS

LR Mini-Riders Mini-Rider Accessories

LAWN TRACTORS

LT Lawn Tractors 51-69 **XT Lawn Tractors**

Lawn Tractor Accessories



ROBOTIC MOWERS

XR Robotic Mowers Robotic Mower Accessories



60V RANGE



ZERO-TURNS

91–103 XZ Zero-Turns 105-126 PRO Zero-Turns **PRO Accessories**







COLLECT, DISCHARGE & OPTIONAL MULCHING

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.

LM1 – PERFECT CUT AND PERFECT COLLECTION

The tough construction ensures a long life cycle and the Cub Cadet OHV engine delivers power and performance to meet and exceed your demands.

With the Cub Cadet LM1 lawnmower, you have the choice between collecting and discharging the clippings and lots of other useful features including easy-to-empty grass bag, ergonomically formed handle, convenient central height adjustment and ball bearing wheels. Mowing the lawn with an LM1 lawnmower is more pleasure, than a chore.





KEY BENEFITS

LARGE GRASS BAG

Reduces the amount of time emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.

The cloth bag fits through the mower's handle to secure it in place and can easily be removed. A quick, simple and efficient system.

CENTRAL CUTTING HEIGHT ADJUSTMENT

Comfortably change the cutting height centrally with one lever – choose from 6 different positions giving a cutting height range from 28 - 92mm.



MODEL AVAILABLE

LM1 CR53

Cutting width:	53 cm / 21"
Mowing area:	950 m²/h
Grass bag capacity:	70
Engine:	Cub Cadet 45 OHV, Pull starte
Engine displacement:	140 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central

www.cubcadet.co.uk

Cub Cadet

9 / LAWNMOWERS

MOW AT YOUR OWN PACE

The intuitive, state-of-the-art MySPEED™ handle on our LM2 and LM3 lawnmowers means that the lawnmower drives at your walking speed. Simply grab the handle, start to walk and see how easy and relaxing mowing can be.

The MySPEED™ system delivers high-performance and industry-leading control with ultra-soft rubber grips to reduce vibrations and operator fatigue. With a MySPEED™ equipped lawnmower, you will experience smoother engagement, superior speed variability and enhanced traction – all with no effort and whilst simply walking at your natural pace.





THE MYSPEED **DRIVE SYSTEM**

The wheel drive is automatically switched on as soon as you push the handle forward. The speed automatically adjusts to your walking speed.

THE 4TH AND 5TH LETTER IN THE PRODUCT NAME

Cub Cadet lawnmowers and lawn tractors carry their technology in the name. The first 2 or 3 letters show the product series and the number stands for the cutting width. The 4th letter then indicates the engine displacement class (not applicable for zero-turns):

A = up to 99 cm³ $F = 201-225 \text{ cm}^3$ $B = 100-125 \text{ cm}^3$ $G = 226-250 \text{ cm}^3$ C = 126-150 cm³ $H = 251-275 \text{ cm}^3$ D = 151-175 cm³ I = 276-300 cm³ $E = 176-200 \text{ cm}^3$ $J = 301-325 \text{ cm}^3$ (or E Rider) K = 326-350 cm³

 $M = 376-399 \text{ cm}^3$ $N = 400-499 \text{ cm}^3$ $O = 500-599 \text{ cm}^3$ $P = 600-699 \text{ cm}^3$ $Q = 700-799 \text{ cm}^3$ $R = 800-899 \text{ cm}^3$ $L = 351-375 \text{ cm}^3$ $S = 900-999 \text{ cm}^3$

The 5th letter and additional lower-case letters signal further special product features and benefits:

Lawnmowers:

P = push mowers, F = front-wheel drive, R = rear-wheel drive

Lawn tractors:

R = rear discharge, S = side discharge

e = electric starter (lawnmower)

i = engines with fuel injection (zero-turns)

s = MySpeed (mowers)

d = double-wheeled zero-turns (Z9)

www.cubcadet.co.uk


Cub Cadet

11 / LAWNMOWERS

Cub Cader Myspeed*



on the LM2 DR46es



MySPEED™ **VARIABLE SPEED** CONTROL

With a variable drive speed system you will set your mowing pace, not the lawnmower.

HEIGHT ADJUSTABLE HANDLE

The handle can be matched to your preferred height, providing a stress and fatigue free mowing experience.

CENTRAL CUTTING HEIGHT ADJUSTMENT

One lever adjusts all four wheels simultaneously. The conveniently placed central lever enables six different cutting heights from 28 - 92mm.

LARGE GRASS BAG

A large grass bag reduces the amount of time spent emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.



COLLECT, DISCHARGE

Mulching means that the grass is cut several times and then equally distributed onto the ground where it can be used as a natural fertiliser; good for the environment and good for your lawn.. Plus there is no collecting or grass disposal which saves you time.

LM2 SERIES - POWERFUL AND COMFORTABLE

Our LM2 series mowers come with powerful Cub Cadet engines and many comfort features. First and foremost, there's the MySpeed variable speed drive, which makes mowing incredibly comfortable and flexible. Simply walk at your own pace, and the LM2 series mower reacts to your desired walking speed, meaning a relaxed mowing experience.

MODELS AVAILABLE



LIVIE DIVIOS	
Cutting width:	46 cm / 18"
Mowing area:	750 m²/h
Grass bag capacity:	60 I
Engine:	Cub Cadet 55 OHV, Pull starter/AutoChoke
Engine displacement:	159 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central



46 cm / 18"
40 (111 / 10
750 m²/h
60 I
Cub Cadet 55 OHV, Electric starter
159 cm ³
Rear-wheel drive
6 positions/central
C E

www.cubcadet.co.uk



COLLECTION, REAR DISCHARGE, SIDE DISCHARGE & MULCHING

4-in-1 means you have the choice of four different options for disposing of the grass clippings, giving you the flexibility to mow your way. A 4-in-1 lawnmower offers the freedom to select the ideal discharge solution for all conditions.

MODELS AVAILABLE



HIGH REAR WHEELS

High rear wheels let you negotiate potholes and uneven lawns effortlessly, for ultra-comfortable handling and smooth driving.



HARD-TOP BAG WITH FILL INDICATOR

The dustproof hard-top means less dust during dry periods, while the fill indicator flap indicates when the grass bag is full and needs emptying.



EASY STARTING ENGINE

The Briggs & Stratton engines with ReadyStart® Technology and Start Guarantee® let you start the mower more easily and confidently. Available on the LM3 CR46s and LM3 CR53s.



Cutting width:	46 cm / 18"
Mowing area:	750 m²/h
Grass bag capacity:	60 I
Engine:	B&S 575 EX-Series, ReadyStart®, Pull starter
Engine displacement:	140 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central



LIMI3 CR53s	
Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	70
Engine:	B&S 625 EXi Series, ReadyStart®, Pull starter
Engine displacement:	150 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central



Cutting width:	53 cm / 21"
Mowing area:	950 m²/h
Grass bag capacity:	70
Engine:	Cub Cadet 55 OHV ES, Electric
Engine displacement:	159 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central

LM3 SERIES - STRONG PERFORMANCE AND MAXIMUM FLEXIBILITY

The flagship models of the LM Series will impress you with their superb features; a range of powerful engines for rapid mowing, the 4-in-1 system for total flexibility in mowing options, variable driving speed with MySpeed available on all models and many more convenient features. So you're guaranteed to find the Cub Cadet lawnmower that perfectly meets your demands and requirements.

15 / LAWNMOWERS

Cub Cadet

STRONG ENOUGH TO CUT EVERYTHING

The Cub Cadet LC3 DP56 lawn trimmer is ideal for clearing long grass and heavy scrub. With the powerful Cub Cadet engine and ultra-large cutting width (56cm / 22") you can trim long grass and weeds at a stroke.




LC3 DP56

Similar to photo

LC3 DF30	
Cutting width:	56 cm / 22"
Cutting height:	60-110 mm
Line:	Ø 3.9 mm
Engine:	Cub Cadet 55 OHV
Wheels:	Ø 360 mm
Drive:	Pushed

ACCESSORY

REPLACEMENT LINE FOR LC3 DP56				
-	10 pcs. of cutting line AF3.20, cut to 3.9 mm x 47 cm length	Part number: 1182-WS-0001		



Cub Cadet



	LM1 CR53	LM2 DR46s	LM2 DR46es	LM3 CR46s
ENGINE				
Engine type	Cub Cadet 45 OHV	Cub Cadet 55 OHV	Cub Cadet 55 OHV	B&S 575 EX-Series, ReadyStart®
Engine displacement	140 cm³	159 cm³	159 cm³	140 cm³
Rated power	2.1 kW / 2,800 min ⁻¹	2.5 kW / 2,800 min ⁻¹	2.5 kW / 2,800 min ⁻¹	2.1 kW / 2,800 min ⁻¹
Engine start	Pull	Pull/AutoChoke	Electric	Pull
Tank volume (capacity)	1.0	1.01	1.0	0.81
DRIVE SYSTEM				
Drive	Rear-wheel drive	Rear-wheel drive	Rear-wheel drive	Rear-wheel drive
Selectable speeds	1	Variable	Variable	Variable
Speed (max)	3.6 km/h	0-3.6 km/h	0–3.6 km/h	0–3.6 km/h
CUTTING SYSTEM				
Mowing area in m²h	950	750	750	750
Cutting deck (material)	Steel	Steel	Steel	Steel
Cutting width	53 cm / 21"	46 cm / 18"	46 cm / 18"	46 cm / 18"
Cutting options	3-in-1 Option	3-in-1	3-in-1	4-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central	6 positions/central
Cutting height (min-max)	28–92 mm	28–92 mm	28–92 mm	28–92 mm
Grass bag	Standard	Standard	Standard	Standard
Mulch Kit (Product code)	Optional (196-589-678)	Standard	Standard	Standard
Side discharge	-	-	-	Standard
Rear discharge without collector	Standard	Standard	Standard	Standard
GRASS BAG				
Grass bag type	Soft bag	Soft bag	Soft bag	Soft bag with hard top
Grass bag capacity	70 l	60 I	60 I	60 I
Bag full indicator	-	-	-	Standard
WHEELS				
Wheels (F/R)	200 mm / 200 mm	180 mm / 200 mm	180 mm / 200 mm	180 mm / 280 mm
Double ball bearings	Standard	Standard	Standard	Standard
COMFORT				
Washing nozzle	Standard	Standard	Standard	Standard
Handle type	Ergonomic	MySpeed	MySpeed	MySpeed
Foldable handle	Standard	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard	Standard
Handle covering	Soft-Grip	-	-	-
DIMENSIONS				
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²			
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	150 cm / 49 cm / 114 cm	150 cm / 49 cm / 114 cm	155 cm / 49 cm / 114 cm
Net weight	34 kg	31 kg	35 kg	34 kg

LM3 CR53s		LM3 DR53es	LC3 DP56	
ENGINE				
Engine type	B&S 625 EXi Series, ReadyStart®	Cub Cadet 55 OHV ES	Cub Cadet 55 OHV	
Engine displacement	150 cm ³	159 cm³	159 cm³	
Rated power	2.2 kW / 2,800 min ⁻¹	2.5 kW / 2,600 min ⁻¹	2.1 kW / 2,800 min ⁻¹	
Engine start	Pull	Electric	Pull	
Tank volume (capacity)	1.0	1.0	1.01	
DRIVE SYSTEM				
Drive	Rear-wheel drive	Rear-wheel drive	Pushed	
Selectable speeds	Variable	Variable	-	
Speed (max)	0–3.6 km/h	0-3.6 km/h	-	
CUTTING SYSTEM				
Mowing area in m²h	950	950	1,000	
Cutting deck (material)	Steel	Steel	Steel	
Cutting width	53 cm / 21"	53 cm / 21"	56 cm / 22"	
Cutting options	4-in-1	4-in-1	-	
Cutting height adjustment	6 positions/central	6 positions/central	-	
Cutting height (min-max)	28–92 mm	28–92 mm	60-110 mm	
Grass bag	Standard	Standard	-	
Mulch Kit (Product code)	Standard	Standard	-	
Side discharge	Standard	Standard	-	
Rear discharge without collector	Standard	Standard	-	
GRASS BAG				
Grass bag type	Soft bag with hard top	Soft bag with hard top	_	
Grass bag capacity	70	70	-	
Bag full indicator	Standard	Standard	-	
WHEELS				
Wheels (F/R)	200 mm / 280 mm	200 mm / 280 mm	Ø 360 mm	
Double ball bearings	Standard	Standard	_	
COMFORT				
Washing nozzle	Standard	Standard	-	
Handle type	MySpeed	MySpeed	_	
Foldable handle	Standard	Standard	-	
Height adjustable handle	Standard	Standard	3 positions	
Handle covering	vering –		-	
DIMENSIONS				
Vibration value 5.0 / 1.5 m/s ²		5.0 / 1.5 m/s ²	6.5 / 1.5 m/s ²	
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	162 cm / 58 cm / 114 cm	140 cm / 55 cm / 100 cn	
Net weight	36 kg	41 kg	31 kg	

ENDURO SERIES"

THE BEST CUB CADET MOWERS ON THE MARKET ENDURO SERIES



-3T- Cub Cadet. ---**TECHNOLOGY**

> Grass cuttings are transported through a turbo tunnel into the grass bag, improving mowing performance and preventing cuttings becoming

stuck or left on the lawn.





2 LARGE GRASS BAG (65/75/80 Litres) with full indicator & dust cover

 ADJUSTABLE HANDLE HEIGHT

for your comfort

A CONVENIENT CENTRAL **6-STEP CUTTING HEIGHT ADJUSTMENT** to achieve the finished grass height you require



3-111-1 MULCH KIT means that you have the choice between collecting the clippings, discharging them out the back or mulching.



POWERFUL ENGINES WITH LARGE DISPLACEMENT

Cub Cadet One XM2 mower and all XM1 mowers come complete with powerful Cub Cadet engines that extend the service life of your lawnmower with outstanding performance particularly on tall grass.

HONDA. Two XM2 mowers **ENGINE** feature Honda engines that are notably quiet and produce lower noise and vibration levels during



ROBUST DESIGN AND HIGH-QUALITY COMPONENTS

The single die-cast housing is extremely robust: there are no screws that can come loose ensuring the machine is easy for you to use. Tough front and side bumpers protect the mower from obstacles.



FAST CLEANING

An integrated mowing deck washing nozzle and a special cleaning position mean raising, rinsing and cleaning the body couldn't be easier.

> For more information and videos.



1 A CHOICE OF AVAILABLE

TRANSMISSION TYPES



 Single Speed (XM1 DR46, XM1 ER53)



VarioSpeed – 6 speeds, perfect for any setting (XM2 DR46, XM2 ER53e).



MySpeed EVO – automatically adjusts to your walking speed. The maximum speed can be preset using a range of detents (XM2 DR46s).

2



MYSPEED EVO

Variable drive – Stepless speed via controller (XM3 ER53).



AVS ANTI-VIBRATION SYSTEM Special axle dampers above the deck absorb vibrations from the engine.



TOP-QUALITY WHEELS Each with double ball bearings for durability.





KEY BENEFITS



TECHNOLOGY

A specially developed geometry inside the mower housing ensures all cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance.



AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine for smooth and easy use for you.



FAST CLEANING

The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle makes cleaning the housing easier.



POWERFUL CUB CADET ENGINE

Delivers the power you need for faster and easier mowing. Ultra-durable engines offer unrivalled performance, especially on long grass.

MODELS AVAILABLE



AIVIT DIN-TO	
Cutting width:	46 cm / 18"
Mowing area:	750 m²/h
Grass bag capacity:	65 I
Engine:	Cub Cadet 55 OHV, Pull starter
Engine displacement:	159 cm ³
Drive:	SingleSpeed
Cutting height adjustment:	6 positions/central



XM1 ER53	
Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	75 I
Engine:	Cub Cadet 65 OHV, Pull starter
Engine displacement:	196 cm ³
Drive:	SingleSpeed
Cutting height adjustment:	6 positions/central

For more information and videos.



www.cubcadet.co.uk

Cub Cadet engine or the smooth Honda engine.

Automatically adjusts to your

ELECTRIC STARTER

The XM2 ER53e engine starts easily at a push of a button.

KEY BENEFITS



-3T- Cub Cadet .-TECHNOLOG

A specially developed geometry inside the mower housing ensures all cuttings are transported through a turbo tunnel into the grass bag, improving mowing performance.



FAST CLEANING


The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle makes cleaning the housing easier.



For more information and videos.

AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine for smooth and easy use for you.



VARIOSPEED

6 speeds, perfect for any setting. (XM2 DR46, XM2 ER53e)

POWERFUL ENGINES

for fast and efficient working with the powerful

Get the power you need

MySpeed™ EVO

walking speed. The maximum speed can be preset. (XM2 DR46s)



MODELS AVAILABLE



Cutting width:	46 cm / 18"
Mowing area:	750 m²/h
Grass bag capacity:	65 I
Engine:	Honda GCV 160, Pull
Engine displacement:	160 cm ³
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central



XM2 DR46s	
Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	65 I
Engine:	Honda GCV 160, Pull
Engine displacement:	160 cm ³
Drive:	MySpeed EVO
Cutting height adjustment:	6 positions/central



Cutting width:	53 cm / 21"
Mowing area:	950 m²/h
Grass bag capacity:	75 I
Engine:	Cub Cadet 65 OHV ES, Electric
Engine displacement:	196 cm ³
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central

25 / LAWNMOWERS

EVERYTHING A LAWNMOWER NEEDS TO BE

The Cub Cadet XM2 lawnmowers offer you the best of both worlds. In addition to the XM1 features they incorporate either VarioSpeed or MySpeed™ EVO wheel drive, adjusting to any situation or

your walking seed, as well as powerful engines, whilst still having 3T technology.

Cub Cadet



OUR TOP MODEL FOR EFFICIENT MOWING

The Cub Cadet XM3 ER53 delivers everything you could want from a lawnmower; exceptional mowing performance, efficiency, easy handling and a professional appearance.

High performance comes from the powerful Kawasaki engine that gets more output than you'd expect from every cubic centimetre of engine displacement.

The blade-brake clutch allows the engine to keep running even when the blade is disengaged, so you don't have to restart the engine every time.

The XM3 ER53 is a must-have machine ideal for both professional and expert gardener use, making short work of even large lawns by combining strength and efficiency.

KEY BENEFITS



BLADE-BRAKE CLUTCH (BBC)

This feature will keep the engine running with the mowing deck switched off, providing safety when you are emptying the grass bag and saving you time because there's no need to restart the engine.



HEAVY DUTY
TRANSMISSION
The aluminium housing on the transmission give

The aluminium housing on the transmission gives you more durability and longer machine life.



STEEL RIMS

Supported by ball bearings the steel rims improve the running quality and give you better stability.



POWERFUL ENGINE

The professional Kawasaki FJ 180 V Kai engine gets more output than you'd expect from every cubic cm of engine displacement, giving you the power to negotiate and mow slopes up to 30°.

27 / LAWNMOWERS www.cubcadet.co.uk LAWNMOWERS / 28

	XM1 DR46	XM1 ER53	XM2 DR46
ENGINE			
Engine type	Cub Cadet 55 OHV	Cub Cadet 65 OHV	Honda GCV 160
Engine displacement	159 cm³	196 cm³	160 cm ³
Rated power	2.5 kW / 2,800 min ⁻¹	3.3 kW / 2,800 min ⁻¹	2.8 kW / 2,800 min ⁻¹
Engine start	Pull	Pull	Pull
Tank volume (capacity)	1.01	1.01	1.0
DRIVE SYSTEM			
Drive	SingleSpeed	SingleSpeed	VarioSpeed
Number of speeds	1	1	6 forward
Speed (max)	3.9 km/h	3.9 km/h	3.2-5.3 km/h
CUTTING SYSTEM			
Mowing area in m²h	750	950	750
Cutting deck (material)	Aluminium	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"	46 cm / 18"
Cutting options	3-in-1	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central
Cutting height (min-max)	20–90 mm	20–90 mm	20–90 mm
Grass bag	Standard	Standard	Standard
Mulch Kit (Product code)	Standard	Standard	Standard
Side discharge	-	-	-
Rear discharge without collector	Standard	Standard	Standard
GRASS BAG			
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 I	75 l	65 I
Bag full indicator	Standard	Standard	Standard
WHEELS			
Wheels (F/R)	200 mm / 240 mm	200 mm / 240 mm	200 mm / 240 mm
Double ball bearings	Standard	Standard	Standard
COMFORT			
Washing nozzle	Standard	Standard	Standard
Handle type	Ergonomic	Ergonomic	Ergonomic
Foldable handle	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard
Handle covering	-	-	-
DIMENSIONS			
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm	189 cm / 55 cm / 103 cm	182 cm / 49 cm / 101 cm
Net weight	42 kg	45 kg	46 kg

	XM2 DR46s	XM2 ER53e	XM3 ER53
ENGINE			
Engine type	Honda GCV 160	Cub Cadet 65 OHV ES	Kawasaki FJ 180 V KAI
Engine displacement	160 cm ³	196 cm³	179 cm³
Rated power	2.8 kW / 2,800 min ⁻¹	3.3 kW / 2,550 min ⁻¹	2.8 kW / 2,800 min ⁻¹
Engine start	Pull	Electric	Pull
Tank volume (capacity)	1.1	1.1	1.6
DRIVE SYSTEM			
Drive	MySpeed EVO	VarioSpeed	Variable drive
Number of speeds	1	6 forward	Stepless
Speed (max)	2.8-3.9 km/h	3.2-5.3 km/h	-
CUTTING SYSTEM			
Mowing area in m²h	750	950	950
Cutting deck (material)	Aluminium	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"	53 cm / 21"
Cutting options	3-in-1	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central
Cutting height (min-max)	20–90 mm	20–90 mm	20–90 mm
Grass bag	Standard	Standard	Standard
Mulch Kit (Product code)	Standard	Standard	Standard
Side discharge	-	-	-
Rear discharge without collector	Standard	Standard	Standard
GRASS BAG			
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	75 I	801
Bag full indicator	Standard	Standard	Standard
WHEELS			
Wheels (F/R)	200 mm / 240 mm	200 mm / 240 mm	200 mm / 240 mm
Double ball bearings	Standard	Standard	Standard
COMFORT			
Washing nozzle	Standard	Standard	Standard
Handle type	MySpeed EVO	Ergonomic	Ergonomic
Foldable handle	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard
Handle covering	-	-	-
DIMENSIONS			
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm	189 cm / 55 cm / 103 cm	189 cm / 55 cm / 94 cm
Net weight	43 kg	48 kg	57 kg



200 LITRE GRASS BAG

A 200 litre grass bag bag (models LR1 MR76 and LR2 NR76) with dust protection cover, two grips and



STEP-THROUGH FRAME

For easy access with soft rubber foot pads and a comfortable foot rest.

CUTTING HEIGHT ADJUSTMENT & PTO CLUTCH

The cutting height can easily be adjusted through five positions from 38 mm to 95 mm and with the individual deck clutch lever the cutting deck can be switched on and off. Both levers are conveniently located on the right side of the seat.

COMPACT AND VERSATILE LIKE NEVER BEFORE

Modern design, versatility and comfortable mowing – just three of the many reasons to choose a Cub Cadet LR1 Mini-Rider. The compact and manoeuvrable Mini-Riders with electric start are equipped with powerful and low-maintenance Cub Cadet engines.

Thanks to their space-saving design, these models are almost as compact as a conventional walk behind mower in terms of garage space.

The Mini-Riders also allow you the option to collect, discharge or mulch your grass clippings.

KEY BENEFITS



TRANSMATIC TRANSMISSION

The transmatic transmission allows shift-on-the-go speed control. Simply choose your driving direction, set the desired basic speed and start mowing.

On the Cub Cadet Mini-Rider LR1 MR76 and LR1 MS76, select between 6 forward and 6 reverse speeds.



76 CM / 30" MOWING DECK

The LR1 MS76 comes with standard side discharge, optional mulch, optional collect.

The LR1 MR76 comes with standard collect, optional mulch, optional side discharge. Whatever you choose, our Mini-Riders can handle it. Thanks to the new blade design you can achieve even better results.

MODELS AVAILABLE





76 cm / 30"
2,500 m ² /h
Standard 200 I
Cub Cadet OHV
382 cm ³
Transmatic
5 positions
Optional extra 196-398-000



Cutting width:	76 cm / 30"
Mowing area:	3,000 m ² /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-397-000

33 / MINI-RIDERS www.cubcadet.co.uk MINI-RIDERS / 34





THE SIZE YOU NEED WITH THE POWER YOU WANT

The Cub Cadet LR2 Mini-Rider delivers all the strength, durability and cutting performance of larger rider models; but in a more compact design.

Premium hydrostatic transmission and the exclusive IPA system gives you optimum control while in operation.

KEY BENEFITS



RevTEK™ TECHNOLOGY

RevTEK[™] – Reverse Mowing Technology; is an ingenious system giving you the ability to mow in reverse when required.



SUPER GRIP PEDALS

Under challenging conditions, the super grip pedals provide maximum grip for safe driving.



HYDROSTATIC DRIVE SYSTEM

The LR2 comes complete with a top-quality hydrostatic drive system. With the parking brake on the left and a one-pedal foot control on the right.

FORCE SERIES



LIGHTS

LED lights for safer operation at dawn.

INTELLIGENT PARKING ASSISTANCE (IPA)

IPA makes parking your LR2 in your garage or shed easier. The intelligent system halves the speed of your Mini-Rider, for reversing more safely and precisely.

MINI-RIDER ACCESSORIES







3-in-1 OPTION

COLLECT, OPTIONAL DISCHARGE & MULCHING.

3-in-1 means that you have the choice between collecting the clippings, discharging them out the back, or mulching.

Mulching means that the grass is cut several times and then equally distributed onto the ground where it can be used as a natural fertiliser; good for the environment and good for your lawn.. Plus there is no collecting or grass disposal which saves you time.

The Side Discharge and Mulching Kits are available as optional extras.

MODEL AVAILABLE



Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	Standard 200 I
Engine:	Cub Cadet OHV
Engine displacement:	439 cm³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-398-000

. bandat and

35 / MINI-RIDERS www.cubcadet.co.uk MINI-RIDERS / 36



MOWING WITH POWER WHILE RESPECTING THE ENVIRONMENT

This model uses powerful electric motors powered by a 56V Li-ION battery. Its large cutting width of 76cm / 30" combined with 60 minutes of running time make the cutting of larger lawns a walk in the park. The Mini-Rider LR2 ES76 comes with a 3 year warranty on both the mower and the battery.



activated manually.

recharged within 4 hours.

	LR1 MR76	LR1 MS76
ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	382 cm³	382 cm³
Rated power	7.6 kW / 2,800 min ⁻¹	8.6 kW / 3,200 min ⁻¹
Cylinders	Single	Single
Tank volume (capacity)	4.9	4.91
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter
DRIVE SYSTEM		
Transmission	Transmatic	Transmatic
Speeds	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go
Control	Foot pedal control	Foot pedal control
CUTTING SYSTEM		
Mowing area in m²h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38–95 mm	38–95 mm
Cutting options	3-in-1 option	3-in-1 option
Number of blades	1	1
Deck engagement	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Optional	Standard/Optional
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Standard 200 I/–	Optional 115 I/(19A30014OEM)
Bag lever/Hardtop	2 grips/plastic	-/-
Bag fill indicator/grass deflector	Standard/Optional	–/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	_
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
Tow hitch	Optional extra 196-398-000	Optional extra 196-397-000
ELECTRICAL		
Battery	12V wet battery 115 CCA	12V wet battery 115 CCA
Headlights	-	-
COMFORT		
Seat type	Comfort Seat	Comfort Seat
Seat adjustment	Screw	Screw
Steering wheel	Standard	Standard
Mow in reverse (RevTEK™)	-	-
Battery charger	(196-967-678)	(196-967-678)
DIMENSIONS Vibration unless had a /// factors	10/05 :: /:2	10/05 :: /:2
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm
Net weight	145 kg	127 kg

	LR2 NR76	LR2 ES76
ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet 56 V / 30 Ah / 1500 Wh
Engine displacement	439 cm³	-
Rated power	8.0 kW / 2,800 min ⁻¹	2.94 kW / 2,200 min ⁻¹
Cylinders	Single	-
Tank volume (capacity)	4.91	-
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	-
DRIVE SYSTEM		
Transmission	Hydrostatic	Electric drive
Speeds	Infinitely variable	variable
Control	Foot pedal control	Foot pedal control
CUTTING SYSTEM		
Mowing area in m ² h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38–95 mm	38–95 mm
Cutting options	3-in-1 option	3-in-1 option
Number of blades	1	1
Deck engagement	Manual lever control	Electric PTO
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Optional	-/Optional
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Standard 200 I/-	Optional 115 I/(19A30014OEM)
Bag lever/Hardtop	2 grips/plastic	-/-
Bag fill indicator/grass deflector	Standard/Optional	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	-
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
Tow hitch	Optional extra 196-398-000	Optional extra 196-397-000
ELECTRICAL		
Battery	12V wet battery 115 CCA	-
Headlights	LED	LED
COMFORT		
Seat type	Deluxe High Comfort Seat	Comfort, high backrest
Seat adjustment	Screw	Screw
Steering wheel	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
Battery charger	(196-967-678)	-
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	170 cm / 97 cm / 88 cm
Net weight	172 kg	163 kg

www.cubcadet.co.uk 39 / MINI-RIDERS MINI-RIDERS / 40





LT LAWN TRACTORS, A STEP UP IN POWER AND PERFORMANCE.

With a lawn tractor from the FORCE SERIES, mowing lawns becomes an even more efficient and effective gardening experience. The decks on lawn tractors are typically six inches wider than those found on mini-riders and over 16" wider in comparison to a regular lawnmower. With a wider cutting deck and more powerful engines not only can you cut more, but you can mow at a speed which is 2-3 times faster, saving you time and effort.

Cub Cadet LT lawn tractors are extraordinarily versatile. They excel when it comes to covering large areas quickly thanks to the oversized grass bag. The side discharge eliminates the need to stop and empty the bag. Thanks to the user-friendly cutting height adjustment, the LT Series achieves optimum cutting results – even on difficult ground.

The LT lawn tractors deliver a perfect mowing performance, exceptional cutting and bagging with incredibly responsive handling.

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000)

DRIVE SYSTEMS





TRANSMATIC TRANSMISSION

Allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it all the way forward to stop. Releasing the brake pedal automatically brings the tractor back to your preset speed.



HYDROSTATIC TRANSMISSION

Impressive with its modern technology and featuring a self-lubricating hydro pump for minimum maintenance and maximum durability. The hydrostatic transmission stands out for its velocity control as well as continual forward and reverse speeds. No clutching or shifting is required which means you can drive more gently with greater accuracy. The LT lawn tractors are controlled by either a hand lever (side discharge tractors) or a foot pedal (rear discharge tractors).

FORCE SERIES

KEY BENEFITS

COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS

The high backrest supports an upright posture, making it far more comfortable. (excluding LT1 NR76)

CUTTING HEIGHT ADJUSTMENT 5-position height adjustment to easily change the cutting height (30-95 mm).

KEY BENEFITS



CENTRAL REAR DISCHARGE - DIRECT COLLECT®

Our rear discharge tractors are designed to transport grass clippings into the grass bag with optimal efficiency. All LT Series rear discharge models feature a grass bag made of durable fabric for flexibility and have an air passage to guarantee air flow and perfect collection. The hard top controls dust and reduces noise. The telescopic handle allows you to empty the grass bag from the driver's seat. (Excluding LT1 NR76)



PRECISE STEERING SYSTEM

All Cub Cadet lawn tractors help redefine your notion of comfort. We improved the steering of the lawn tractors. Our precision gear-steering technology supports operators at work and makes your powerful lawn tractor even more efficient and surprisingly easy to manoeuvre.



All tractor frames are made of fully welded and powder-coated rugged steel, for added durability.

STEEL FRAME



FLOATING STEEL OR CAST IRON FRONT AXLE

Keeping all four wheels on the ground, however uneven the surface.



ONE-PIECE BONNET

The entire engine bonnet can be removed within seconds without the need for tools, allowing for easy maintenance.

MODELS AVAILABLE



Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	200
Engine:	Cub Cadet OHV
Engine displacement:	382 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions



Cutting width:	92 cm / 36"
Mowing area:	3,500 m ² /h
Grass bag capacity:	240
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Cutting height adjustment:	5 positions



Cutting width:	96 cm / 38"
Mowing area:	4,000 m ² /h
Grass bag capacity:	200 I optional
Engine:	Cub Cadet OHV
Engine displacement:	439 cm³
Drive:	Transmatic
Cutting height adjustment:	5 positions

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000)

www.cubcadet.co.uk LAWN TRACTORS / 46



92 cm / 36"

3,500 m²/h

Cub Cadet OHV

LT2 NR92

Cutting width:

Mowing area:

47 / LAWN TRACTORS

Grass bag capacity:







Our LT lawn tractors are equipped with powerful and reliable Cub Cadet engines developed in the USA. Our LT3 models are equipped with twin cylinder engines.





Cutting width:	96 cm / 38"
Mowing area:	4,000 m ² /h
Grass bag capacity:	200 I optional
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions



Cutting width:	105 cm / 41"
Mowing area:	4,500 m ² /h
Grass bag capacity:	2401
Engine:	Cub Cadet 679cm³ V-TWIN
Engine displacement:	679 cm³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions



Cutting width:	107 cm / 42"
Mowing area:	5,500 m ² /h
Grass bag capacity:	200 I optional
Engine:	Cub Cadet 679cm³ V-TWIN
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	E positions

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000)

www.cubcadet.co.uk

	LT1 NR76	LT1 NR92	LT1 NS96
ENGINE			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	382 cm ³	439 cm³	439 cm³
Rated power	7.0 kW / 2,500 min ⁻¹	8.1 kW / 2,700 min ⁻¹	8.3 kW / 2,800 min ⁻¹
Cylinders	Single	Single	Single
Tank volume (capacity)	3.8	3.8	3.8 l
DRIVE SYSTEM			
Transmission	Transmatic 7 speed	Transmatic	Transmatic
Speeds	7 (f/r), shift-on-the-go	7 (f/r), shift-on-the-go	7 (f/r), shift-on-the-go
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Yes	-	-
CUTTING SYSTEM			
Mowing area in m²h	2,500	3,500	4,000
Cutting width	76 cm / 30"	92 cm / 36"	96 cm / 38"
Cutting height (min-max)	30–95 mm	30–95 mm	30–95 mm
Number of blades	1	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Wash nozzle/Mulch Kit	-/-	-/(196-749A678) Optional	–/(OEM-190A116) Optional
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	200 I/-	240 l/–	Optional 200 I/(OEM-190-180A)
Bag lever/hardtop	-/-	Telescopic handle/Plastic	-/-
Bag fill indicator/grass deflector	-/Standard	-/(196-750A678)	–/Standard
FRAME			
Front axle	Steel	Steel	Steel
Front bumper	(OEM-190-679) Optional	(OEM-190-679) Optional	(OEM-190-679) Optional
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 18 x 6.5	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Standard	Easy entry frame	Easy entry frame
Headlights	Standard	Standard	Standard
COMFORT			
Seat type	Medium back	High back	High back
Seat adjustment	Screw	Tool-less	Tool-less
Steering wheel	Comfort	Standard	Standard
Toolbox/Cupholder	-/-	-/-	-/-
12 V plug	-/-	-	-
Mow in reverse (RevTEK™)	Standard	-	-
Battery charger	(196-967-678)	(196-967-678)	(196-967-678)
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 91 cm / 103 cm	225 cm / 99 cm / 103 cm	170 cm / 107 cm / 100 cm
Net weight	150 kg	195 kg	150 kg

LT2 NR92	LT2 NS96	LT3 PR105	LT3 PS107
Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
439 cm ³	439 cm ³	679 cm³	679 cm³
8.1 kW / 2,700 min ⁻¹	8.3 kW / 2,800 min ⁻¹	12.7 kW / 2,700 min ⁻¹	13.1 kW / 2,800 min ⁻¹
Single	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
3.81	3.81	3.81	3.8
Foot-hydrostatic	Hand-hydrostatic	Foot-hydrostatic	Hand-hydrostatic
Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Foot pedal control	Manual lever control	Foot pedal control	Manual lever control
	_	-	-
3,500	4,000	4,500	5,500
92 cm / 36"	96 cm / 38"	105 cm / 41"	107 cm / 42"
30–95 mm	30–95 mm	30–95 mm	30–95 mm
2	2	2	2
Manual lever control	Manual lever control	Manual lever control	Manual lever control
5 positions	5 positions	5 positions	5 positions
-/(196-749A678) Optional	-/(OEM-190A116) Optional	Standard/(196-749A678) Optional	Standard/Standard
240 l/–	Optional 200 I/(OEM-190-180A)	240 l/–	Optional 200 I/(OEM-190-180A)
Telescopic handle/Plastic	-/-	Telescopic handle/Plastic	-/-
-/(196-750A678)	–/Standard	-/(196-750A678)	–/Standard
Steel	Steel	Heavy-duty cast-iron	Heavy-duty cast-iron
(OEM-190-679) Optional	(OEM-190-679) Optional	Standard	Standard
46 cm / 18"	46 cm / 18"	46 cm / 18"	46 cm / 18"
15 x 6 / 18 x 9.5	15 x 6 / 20 x 8	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8
Sleeve bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Easy entry frame	Easy entry frame	Easy entry frame
Standard	Standard	Standard	Standard
High back	High back	High back	High back
Tool-less	Tool-less	Tool-less	Tool-less
Soft-Grip	Soft-Grip	Soft-Grip	Soft-Grip
-/-	-/-	-/-	-/-
-	=	-	=
-	-	Standard	Standard
(196-967-678)	(196-967-678)	(196-967-678)	(196-967-678)
1.0 / 0.5 m/s ²	1.0 / 0.5 m/s²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
225 cm / 99 cm / 103 cm	170 cm / 107 cm / 100 cm	225 cm / 110 cm / 103 cm	170 cm / 115 cm / 100 cm
196 kg	150 kg	198 kg	175 kg

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Model. no: 196-399-000)

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Model. no: 196-399-000)



OUR TOP 5 MARKET LEADING FEATURES

1.

MARKET LEADING CUTTING, COLLECTING AND MULCHING 3-IN-1 SYSTEM

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.





THE SMALLEST TURNING CIRCLE ON THE MARKET

Unbeatable efficiency even in confined spaces thanks to our innovative TIGHT TURN XTREME technology available on all XT2 and XT3 models.

2.

3.

ULTRA-STURDY, CORROSION-RESISTANT FRAME

Ultra-rigid frame for top durability.





PERFECTLY MATCHED TRANSMISSION AND ENGINE POWER

Optimal drive system and the most powerful engine in its class.

4.

5.

www.cubcadet.co.uk

ULTRA-RELIABLE V-BELT DESIGN

Improved V-belt design reduces belt tension ensuring longer belt life and impressive stability. The XT2 QS117 and XT3 QS137 tractors are also equipped with a welded fabricated mowing deck.

Improved V-belt design redu ensuring longer belt life and The XT2 QS117 and XT3 QS1



DECADES OF ENGINE DEVELOPMENT EXPERTISE

MORE THAN 10 MILLION CUB CADET ENGINES IN USE WORLDWIDE

Cub Cadet has been designing and manufacturing its own engines for decades, with more than ten million units delivered worldwide. Specifically designed for our products, Cub Cadet engines deliver perfect results every time. Because of its global expertise and competitive products, Cub Cadet became the fastest-growing riding mower brand in the U.S..



MORE GREAT FEATURES THAT MAKE YOUR MOWING EASIER



GRASS BAG WITH ELECTRONIC EMPTYING

At the touch of a button, the grass bag lifts up and tips the cuttings out. Effortless, even when the bag is full. Universal optional accessory for all XT models retrofittable from 2018.



ADJUSTABLE SEAT

The seat can be adjusted to suit you and provide pure comfort whilst you mow (XT3 seat shown).



POWERFUL BATTERY

High-quality wet batteries tailored to the engine allow a smooth starting process without the filling of acid.



MEMORY CURSOR

A cutting height memory cursor which displays your most frequently used and/or favorite cutting heights.



POWERFUL KAWASAKI V-TWIN ENGINE

A two-cylinder engine for challenging terrain. Ultra-smooth running with low fuel consumption.

XT MODELS WITH KAWASAKI V-TWIN ENGINES:

XT2 PR95, XT2 QR106, XT2 PS107, XT2 QS117, XT3 QR106, XT3 QS127, XT3 QS137





WHICH XT ENDURO TO CHOOSE?









MARKET LEADING CUTTING, COLLECTING AND MULCHING SYSTEM

- All-new grass collecting system and rear-discharge mowing decks.
- With twice the grass-catching of previous Cub Cadet lawn tractors.
- Best direct collect rear discharge on the market.

320 LITRE BAG CAPACITY

360 LITRE BAG CAPACITY

HYDROSTATIC V-BELT

V-BLE!

POWERFUL CUB CADET ENGINE reliable and high performance engine (XT1 OS96, XT1 OS107, XT1 OR95, XT1 OR106)

HYDROSTATIC POWER TRANSMISSION

Smooth drive system – simply put your foot on the pedal and go

V-TWIN ENGINE 2-cylinder engine

(XT2 PR95, XT2 QR106, XT2 PS107, XT2 QS117)


(XT2 PS117)


KAWASAKI V-TWIN ENGINE


KAWASAKI V-TWIN ENGINE

2-cylinder engine for difficult terrain, ultra-smooth running and low fuel consumption. (XT3 QR106, XT3 QS127, XT3 QS137)









KEY START

SOLID, WELDED MOWING DECK for XT2 QS117 & XT3 QS137

ANTI-DUST GRASS BAG SYSTEM AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST SYSTEM

Rear discharge with multi-layer dust apron included in accessories. The apron protects against flying grass and dirt.

ALL-GROUND TRACTION SYSTEM

Perfect traction even on heavy ground – thanks to mechanical differential lock.

^{*}The turning circle of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning circle – included in all product specifications.



KEY BENEFITS



MODELS AVAILABLE



VII 03101	
Cutting width:	107 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	Optional 200 I
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT1 OR95	
Cutting width:	95 cm /38"
Mowing area:	5,500 m ² /h
Grass bag capacity:	320 I
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



ENDURO SERIES™

106 cm / 42"
7,500 m²/h
320 l
Cub Cadet
547 cm ³
Hydrostatic
12 positions

Cub Cadet ENDURO SERIES (Banka) **POWER FOR GREATER CHALLENGES** The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. Tight Turn Xtreme makes them ideal for working on tough terrain, transporting and using additional accessories, For more whatever the season. At just 17 cm turning circle the XT2 series have the tightest turning radius on the information market. Innovative tight turn technology delivers unsurpassed capability in tight places. and videos.

ENDURO SERIES

KEY BENEFITS



PUSH BUTTON BLADE START

Activate the cutting blades safely and more efficiently.

HYDROSTATIC DRIVE SYSTEM

Smooth drive system for precise mowing simply put your foot on the pedal and go.

MODELS AVAILABLE



Cutting width:	95 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	3201
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



utting width:	106 cm / 42"
lowing area:	8,000 m ² /h
rass bag capacity:	320
ngine:	Kawasaki, V-TWIN dual cylinder
ngine displacement:	726 cm³
rive:	Hydrostatic
utting height adjustment:	12 positions



V17 L2101	
Cutting width:	107 cm / 42"
Mowing area:	8,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT2 PS117	
Cutting width:	117 cm / 46"
Mowing area:	9,000 m ² /h
Grass bag capacity:	200 I optional
Engine:	Cub Cadet
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



Cutting width:	117 cm / 46" welded mowing deck
Lawn area (rec.):	9,000 m ² /h
Collecting volume:	200 I optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions







LI-ION-POWER

Modern battery technology ensures a long service life as well as speedy charging cycles once hooked up to an outlet, the battery is fully recharged within 4 hours.

ZERO-EMISSIONS. SUPERIOR CUT. POWERFUL PERFORMANCE

We have taken the XT Series flagship tractor with its proven strength and performance and combined it with a powerful and convenient lithium-ion battery to create a machine with no power fade and reduced noise for an enjoyable mowing experience; while delivering a superior cut with no compromise on performance. With a running time of approx. 90 minutes, depending on lawn and soil conditions and a cutting width of 107cm / 42", even large lawns can be cut quickly and efficiently. Good for you. Good for the environment.



PARTICULARLY SMOOTH-RUNNING

A light touch of the pedal is all it takes for the electric mower to start moving smoothly.

CIRCLE ON THE MARKET

Innovative TIGHT TURN xTREME Technology for an unmatched 17 cm turning circle.

Cub Cadet ENDURO SERIES For more information and videos. **MAXIMUM STRENGTH AND POWER** FOR THE TOUGHEST TASKS

TIGHT TURN **XTREME**

Just 17 cm turning circle thanks to TIGHT TURN xTREME.



ENDURO SERIES™

KEY BENEFITS



STRONG V-TWIN **KAWASAKI ENGINE**

Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.



XT3 QR106

Cutting width:

Mowing area: Grass bag capacity:

Engine:

ANTI-DUST SYSTEM

Rear discharge with multi-layer dust apron included in the equipment protects against swirling grass and dirt.

WELDED MOWING DECK For high durability and robustness on

Powered by **Kawasaki**

the XT3 QS137.

MODELS AVAILABLE



106 cm / 42"

360l and Anti-Dust-System

Hydrostatic, All-Ground Traction System

Kawasaki, V-TWIN dual cylinder

8.000 m²/h

726 cm³



XT3 QS127

Cutting width:	127 cm / 50"
Mowing area:	10,000 m ² /h
Grass bag capacity:	Optional 210 I
Engine:	Kawasaki, V- TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic, All-Ground Traction System
Cutting height adjustment:	12 positions



XT3 QS137

Powered by Kawasaki

Cutting width:	137 cm / 54" welded mowing deck
Mowing area:	11,000 m²/h
Grass bag capacity:	Optional 210 l
Engine:	Kawasaki, V- TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic, All-Ground Traction System
Cutting height adjustment:	12 positions

Cub Cadet . = ALL-GROUND TRACTION

Optimum traction, however tough the terrain - thanks to the mechanical differential lock.

63 / LAWN TRACTORS

optimum traction however tough the terrain.

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 ENDURO SERIES are the ultimate lawn tractors. Brimming with power, capable of mowing dense grass and transporting

larger loads including a mechanical differential lock that provides

www.cubcadet.co.uk

	XT1 OS96	XT1 OS107
ENGINE		
Engine type	Cub Cadet	Cub Cadet
Engine displacement	547 cm³	547 cm³
Rated power	9.0 kW / 2,300 min ⁻¹	9.0 kW / 2,300 min ⁻¹
Cylinders	Single	Single
Tank volume (capacity)	11.4	11.4
DRIVE SYSTEM		
Transmission	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m²h	6,000	8,000
Cutting width	96 cm / 38"	107 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped
Number of blades	2	2
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	-/Standard/Standard	Standard/Standard/ Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Optional 200 I/(OEMR190-180A)	Optional 200 I/(19A30030100)
Bag lever/hardtop	-/-	-/-
Bag fill indicator/grass deflector	–/Standard	-/Standard
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Single Tube
Turning circle	TIGHT TURN 38 cm	TIGHT TURN 38 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 20 x 8	15 x 6 Turf Saver / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC		
Headlights	LED	LED
COMFORT		
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	1 piece	1 piece
Toolbox/Cupholder	Standard/Standard	Standard/Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	175 cm / 124 cm / 110 cm	175 cm / 134 cm / 110 cm
Net weight	195 kg	195 kg

	XT1 OR95	XT1 OR106		
ENGINE				
Engine type	Cub Cadet	Cub Cadet		
Engine displacement	547 cm³	547 cm³		
Rated power	6.2 kW / 2,100 min ⁻¹	6.6 kW / 2,250 min ⁻¹		
Cylinders	Single	Single		
Tank volume (capacity)	11.4	11.4		
DRIVE SYSTEM				
Transmission	Hydrostatic	Hydrostatic		
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)		
Control	Foot pedal control	Foot pedal control		
Cruise control	Standard	Standard		
CUTTING SYSTEM	J. C.	Startdard		
Mowing area in m ² h	5,500	7,500		
Cutting width	95 cm / 38"	106 cm / 42"		
Cutting height (min-max)	25–100 mm	25–100 mm		
Cutting deck	Stamped	Stamped		
Number of blades	2	2		
Deck engagement	Electric PTO	Electric PTO		
Deck height positions	12 positions	12 positions		
Deck wheels	2 balls deck wheels	4 balls deck wheels		
Wash nozzle/Mulch Kit/				
mulching blades	Standard/(196-551-000)/ (196-561-000)	Standard/(196-550-000)/ (196-560-000)		
DISCHARGE SYSTEM	,			
Bag (capacity)/accessory no.	320 l/ (196-555-603 Anti-Dust-System)	320 I/ (196-555-603 Anti-Dust-System)		
Bag lever/hardtop	Rounded ergo telescopic handle/ Plastic	Rounded ergo telescopic handle/ Plastic		
Bag fill indicator/grass deflector	Deluxe w Blade Shutoff/ (196-552A000)	Deluxe w Blade Shutoff/ (196-552A000)		
FRAME				
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron		
Front bumper	Single Tube	Single Tube		
Turning circle	TIGHT TURN 38 cm	TIGHT TURN 38 cm		
Wheel size (f/r in inch)	15 x 6 Turf Saver / 18 x 8.5	15 x 6 Turf Saver / 18 x 8.5		
Wheel bearings	Sleeve bearings	Sleeve bearings		
Frame	Fully robotically-welded frame	Fully robotically-welded frame		
ELECTRIC				
Headlights	LED	LED		
COMFORT				
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet		
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide		
Steering wheel	1 piece	1 piece		
Toolbox/Cupholder	Standard/Standard	Standard/Standard		
Mow in reverse (RevTEK™)	Standard	Standard		
DIMENSIONS				
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²		
K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²		
Dimensions (L/W/H)	245 cm / 100 cm / 118 cm	245 cm / 110 cm / 118 cm		
Net weight	235 kg	258 kg		

www.cubcadet.co.uk 65 / LAWN TRACTORS LAWN TRACTORS / 66

	XT2 PR95	XT2 QR106	XT2 PS107
ENGINE			
Engine type	Kawasaki	Kawasaki	Kawasaki
Engine displacement	603 cm³	726 cm³	603 cm³
Rated power	9.3 kW / 2.150 min ⁻¹	11.6 kW / 2,200 min ⁻¹	10.4 kW / 2,400 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4	4.1 mm	11.4
DRIVE SYSTEM		·	
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM		·	
Mowing area in m²h	6,000	8,000	8,500
Cutting width	95 cm / 38"	106 cm / 42"	107 cm/ 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	4 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/(196-551-000)/ (196-561-000)	Standard/(196-550-000)/ (196-560-000)	Standard/Standard/ Standard
DISCHARGE SYSTEM	, , , , , , , , , , , , , , , , , , , ,		
Bag (capacity)/accessory no.	320 l/ (196-555-603 Anti-Dust-System)	320 l/ (196-555-603 Anti-Dust-System)	Optional 200 I/(19A30030100)
Bag lever/hardtop	Rounded ergo telescopic handle/ Plastic	Rounded ergo telescopic handle/ Plastic	-/-
Bag fill indicator/grass deflector	Deluxe w Blade Shutoff/ (196-552A000)	Deluxe w Blade Shutoff/ (196-552A000)	-/Standard
FRAME		· · · · · · · · · · · · · · · · · · ·	
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Single Tube	Single Tube
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 18 x 8.5	15 x 6 Turf Saver / 18 x 8.5	15 x 6 Turf Saver / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	1 piece	1 piece	1 piece
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	250 cm / 100 cm / 118 cm	250 cm / 110 cm / 118 cm	180 cm / 134 cm / 100 cm
Net weight	254 kg	253 kg	253 kg

	XT2 PS117	XT2 QS117	XT2 ES107
ENGINE			
Engine type	Cub Cadet	Kawasaki	Cub Cadet 56 V / 60 Ah / 3.000 Wh
Engine displacement/ Output Watts (only XT2 ES107)	679 cm³	726 cm³	-
Rated power	11.8 kW / 2,750 min ⁻¹	15.8 kW / 2,700 min ⁻¹	2.94 kW / 2,200 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	-
Tank volume (capacity)	11.4	11.4	-
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Electric drive
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m²h	9,000	9,000	8,000
Cutting width	117 cm/ 46"	117 cm/ 46"	107cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Welded mowing deck	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/Standard/ Standard	Standard/Standard/Standard	Optional mulch plug
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Optional 200 I/(19A30030100)	Optional 200 I/(19A30030100)	Optional 200 I/(19A30030100)
Bag lever/hardtop	-/-	-/-	-/-
Bag fill indicator/grass deflector	-/Standard	-/Standard	-/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Single Tube	Single Tube
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 20 x 8.5	15 x 6 Turf Saver / 20 x 8.5	15 x 6 Turf Saver / 20 x 8 Turf Saver
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	1 piece	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	180 cm / 146 cm / 110 cm	180 cm / 144 cm / 110 cm	180 cm / 115 cm / 120 cm
Net weight	253 kg	230 kg	245 kg

www.cubcadet.co.uk 67 / LAWN TRACTORS LAWN TRACTORS / 68



	XT3 QR106	XT3 QS127	XT3 QS137
ENGINE			
Engine type	Kawasaki	Kawasaki	Kawasaki
Engine displacement	726 cm³	726 cm ³	726 cm³
Rated power	12.4 kW / 2,200 min ⁻¹	15.7 kW / 2,800 min ⁻¹	16.2 kW / 3,000 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4	11.4	11.4
DRIVE SYSTEM			
Transmission	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m²h	8,000	10,000	11,000
Cutting width	106 cm / 42"	127 cm / 50"	137 cm / 54"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Welded mowing deck
Number of blades	2	3	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/(196-550-000)/ (196-560-000)	Standard/Standard/ Standard	Standard/Standard/ Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	360 I, with Anti-Dust System/–	Optional 210 I/(19A30018100)	Optional 210 I/(19A30018100)
Bag lever/hardtop	Rounded ergo telescopic handle/Plastic	-/-	-/-
Bag fill indicator/grass deflector	Deluxe w Blade Shutoff/ (196-552A000)	–/Standard	–/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Bull Bar	Bull Bar	Bull Bar
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 Turf Saver / 18 x 8.5	16 x 6.5-8 Turf Saver / 22 x 9.5	16 x 6.5-8 Turf Saver / 22 x 9.5
Wheel bearings	Sleeve bearings	Ball bearings	Ball bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	High Back Seat Cub Cadet/Armrests	High Back Seat Cub Cadet/Armrests	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	1 piece	1 piece	1 piece
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	267 cm / 110 cm / 118 cm	197 cm / 155 cm / 110 cm	197 cm / 167 cm / 110 cm
Net weight	268 kg	260 kg	270 kg



THE MOST COMPREHENSIVE RANGE OF ACCESSORIES

The extensive range of Cub Cadet accessories will help to meet all your gardening requirements and means you can use your lawn tractor all year round.

69 / LAWN TRACTORS www.cubcadet.co.uk

Cub Cadet



ADDITIONAL ACCESSORIES			
Battery charger for LR, LT and XT Series	Part number: 196-967-678	Electrical grass catcher emptying mechanism for XT Series rear discharger system. Suitable for 2018+ models.	Part number: 196-570-600

	FRONT BUMPER	
	Front bumper Kit with FastAttach™ fits all LT Series lawn tractors	Part number: OEM-190-679
	Front Bumper Loop, XT Series	Part number: 196-563-000
	Front Bumper Bull Bar, XT Series	Part number: 196-564-000
	DEFLECTORS	
	Rear deflector for all XT Series rear-discharger models	Part number: 196-552A000
	Rear deflector for LT Series rear-discharger models	Part number: 196-750A678
MOLD	LAWN TRACTOR COVER	
	Size XL: for large-sized and rear discharge lawn tractors	Part number: 19A1902I603
	SNOW CHAINS	
	For 20" x 8.0" wheels incl. adapter	Part number: 196-658-699
	For 18" x 8.5" wheels incl. adapter	Part number: 490-241-0022
	For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels	Part number: 490-241-0025
	DOZER BLADE AND RUBBER LIP	
<i></i>	117 cm dozer blade for LT Series	Part number: OEM-190-833
	Rubber lip – universal – for all dozer blades	Part number: 196-718-678
	117 cm dozer blade for LT und XT Series	Part number: 19A30017OEM

ADDITIONAL ACCESSORIES					
Rear hitch for LT series with rear discharge	Part number: 196-399-000	Mulch Blades for 106cm XT1, XT2, XT3 direct collect	Part number: 196-560-000	Mulch Blades for 95cm XT1, XT2, XT3 direct collect	Part number: 196-561-000

71 / LAWN TRACTORS www.cubcadet.co.uk LAWN TRACTORS / 72





SELF-CLEANING

Self cleaning deck

ROBOTIC MOWERS

and wheels, making maintenance a breeze.

XR5 COMES WITH UPGRADED JURES



NEW XR5!

From its floating deck and superior slope handling, to its self cleaning and replaceable parts, the XR5 series are packed with features to make getting the perfect lawn as easy and efficient as possible.





	0
40	<u> </u>

XR5 1000	
Cutting width:	21 cm / 8"
Cutting height:	15-100 mm
Area performance (rec.):	up to 1,000 m ² *
Mowing time:	50-60 min
Motor:	DC Brushless

XR5 2000	
Cutting width:	21 cm / 8"
Cutting height:	15-100 mm
Area performance (rec.):	up to 2,000 m ² *
Mowing time:	100-120 min
Motor:	DC Brushless

Electricity consumption: 5.1 kWh/Month







XR5 3000	
Cutting width:	42cm / 16"
Cutting height:	20-100 mm
Lawn area (rec.):	Up to 3,000 m ² *
Mowing time:	80-90 min
Engine:	DC Brushless
Power consumption:	8.7 kWh/month



XR5 4000	
Cutting width:	42cm / 16"
Cutting height:	20-100 mm
Lawn area (rec.):	Up to 4,000 m²*
Mowing time:	110-120 min
Engine:	DC Brushless
Power consumption:	11.5 kWh/month







FLOATING DECK A floating deck cuts uneven lawns flawlessly on any terrain, quaranteeing an excellent cut every time for even the most unusual landscapes.



SLOPE HANDLING 45% slope handling performance makes light work of the most challenging lawn setups.



7. 4.3" TOUCHSCREEN Set your mower to the exact setting you want with an easy-to-use 4.3" LCD touchscreen.



100 MM CUTTING HEIGHT Tall, thick grass is not a problem with a 100 mm maximum cutting height



EDGE MODE **TECHNOLOGY** The XR5's unique edging ability mows beyond the wheel to deliver a precise finish every time.



PATENTED ALL TERRAIN WHEELS

Whatever your lawn surface looks like, the patented high traction, all-terrain wheels can navigate it smoothly and efficiently.



S. PATENTED CUTTING SYSTEM Thanks to its patented

cutting system you can have a great cut.



LOW NOISE No more waiting for a sunny afternoon to tackle the lawn. Thanks to its drive motor, the XR5 is so quiet it could mow

at night.



10. 360 DEGREE SENSOR The XR5's omni-directional obstruction sensor ensures that it can navigate its way around any obstacle (please still make sure that there are no children or pets on the lawn while mowing).



The extended warranty PLUS is the best protection for your Cub Cadet XR5 and it's free. Just register your device on the website within 3 months of purchase and enjoy a 4th year of warranty for free. Plus additional protection against damage and loss. If during the 4 years a failure occurs in your registered XR5 and it is covered by the warranty conditions then the unit will be repaired with no cost to you, for TOTAL peace of mind. For full details go to cubcadet.co.uk

** Manufacturer's guarantee from MTD Products AG, limited to supplementary performance and according to the guarantee

THE GARDENING ASSISTANT YOU'VE BEEN LOOKING FOR

The XR5 has been developed to cut your lawn with such precision that your neighbour will think you have cut your lawn yourself. The high quality steel blades cut your grass for maximum health and thickness so you get a luscious lawn with the time back to actually



1. BEAUTIFULLY **FINISHED EDGES**

Cutting beyond the edge of the wheel, the XR5 gives you a finish to be proud of, even on uneven surfaces.



2. HANDLES THICK GRASS **AND UNEVEN TERRAIN**

The reliable XR5 will never let you down. It doesn't get stuck and handles uneven terrain reliably.



3. EASY TO USE

From our easy to use interface and other features, including the charging station, Cub Cadet ensures that the XR5 is quick and easy to install.



4. EASY TO MAINTAIN

XR5 has been developed to self-clean, giving you more time in the garden. For complete peace of mind, you should arrange an annual maintenance service with your dealer.

COMPLETE **CONTROL VIA SMARTPHONE**

The App allows the robotic mowers in the XR ENDURO SERIES to be controlled and programmed securely and conveniently using your smartphone. Our recent BLE 5.0 upgrade now allows for faster data transfer of up to 2 MBps and greater outdoor range. Simply download the app, install it on your phone and get mowing.



DISCOVER THE NEW XR5!







REMOTE CONTROL

XR mowers can be manually controlled, even beyond the perimeter wire.



UPDATES

- · Mowing progress
- · Battery charge
- Mowing times



PROGRAM SETTINGS

- /• Mowing
- To charging station
- /Deactivate/automatic/start/
- Set/mowing/times/

Cub Cadet.



67 cm / 53 cm / 28 cm

	XR5 1000	XR5 2000
BATTERY		
Engine	DC Brushless	DC Brushless
Battery	18.15V Li-lon	18.15V Li-lon
Mowing time	40–50 min	80–90 min
Charging time	60–120 min	60–120 min
Power consumption	4.0 kWh/month	7.3 kWh/month
CUTTING SYSTEM		
Lawn area (rec.)	Up to 1,000 m ² *	Up to 2,000 m ² *
Cutting width	21 cm / 8"	21 cm / 8"
Cutting height (minmax.)	15–100 mm	15–100 mm
Blades	4 cutting blades	4 cutting blades
Mowing zones	1 main zone, 4 sub zones, separate zones	1 main zone, 4 sub zones, separate zones
Area coverage per hour	65 m²/h	65 m²/h
Maximum inclination	24° / 45 %	24° / 45 %
EQUIPMENT		
Base station	Included	Included
RoboHome	Optional (122-085-603)	Optional (122-085-603)
Display	4.3" HD coloured touch	4.3" HD coloured touch
Bluetooth®	5.0	5.0
Арр	Standard	Standard
Anti-theft	Standard	Standard
Bump-Sensor	360° detection	360° detection
Tilt-Sensor	Standard	Standard
Lift-Sensor	Standard	Standard
Edge mode	Standard	Standard
GSM modul	Standard	Standard
Wheels	HIGH TRACTION all terrain wheels	HIGH TRACTION all terrain wheels
DIMENSIONS		
LpA/LwA/LwAg (dB)	50/61/64	50/61/64
Dimensions (L/W/H)	67 cm / 51 cm / 28 cm	67 cm / 51 cm / 28 cm

	NEW	NEW
	XR5 3000	XR5 4000
BATTERY		
Engine	DC Brushless	DC Brushless
Battery	18.15V Li-lon	18.15V Li-lon
Mowing time	80–90 min	110–120 min
Charging time	60-80 min	90–110 min
Power consumption	8.7 kWh/month	11.5 kWh/month
CUTTING SYSTEM		
Lawn area (rec.)	Up to 3,000 m ² *	Up to 4,000 m ² *
Cutting width	42 cm / 16.5"	42 cm / 16.5"
Cutting height (minmax.)	20–100 mm	20–100 mm
Blades	2 x 4 blades	2 x 4 blades
Mowing zones	1 main zone, 4 sub zones, separate zones	1 main zone, 4 sub zones, separate zones
Area coverage per hour	135 m²/h 135 m²/h	
Maximum inclination	24° / 45 %	24° / 45 %
EQUIPMENT		
Base station	Included	Included
RoboHome	Optional (122-085-603)	Optional (122-085-603)
Display	4.3" HD coloured touch	4.3" HD coloured touch
Bluetooth®	5.0	5.0
Арр	Standard	Standard
Anti-theft	Standard	Standard
Bump-Sensor	360° detection	360° detection
Tilt-Sensor	Standard	Standard
Lift-Sensor	Standard	Standard
Edge mode	Standard	Standard
GSM modul	Standard	Standard
Wheels	HIGH TRACTION all terrain wheels	HIGH TRACTION all terrain wheels
DIMENSIONS		
LpA/LwA/LwAg (dB)	50/61/64	50/61/64

Dimensions (L/W/H)

www.cubcadet.co.uk ROBOTIC MOWERS / 82

67 cm / 53 cm / 28 cm

^{*}Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.





REPLACEMENT BLADES

Blade kit XR5 models

122-105-603



COVERS

RoboHome for XR5 models

122-085-603

ADDITIONAL ACCESSORIES			
Pegs 50 pcs	Part number: MRK7101A	Perimeter wire 100m	Part number: MRK0040A
Perimeter wire 200m	Part number: MRK0060A	Repair connectors 10pcs	Part number: MRK0039A1







/83///ROBOTIC/MOWERS///

///www.cubcadet.co.uk

Think electric equipment compromises power? Think again. Our 60V MAX battery system will provide you with the premium cut quality and performance you expect in garden machinery.



- **AVAILABLE IN BOTH 2.5 AH AND** 5.0 AH OPTIONS
- **EASY AND RELIABLE PUSH TO START** BUTTON - NO MORE PULLING CORDS
- UP TO 80 % QUIETER THAN COMPARABLE PETROL EQUIPMENT
- ZERO EMISSIONS FROM EQUIPMENT'S **POWER SOURCE**
- **BRUSHLESS MOTOR MAXIMISES EFFICIENCY AND EXTENDS LIFE** OF MACHINE
- ALL HAND TOOLS WITH PRACTICAL **HOOK FOR SPACE-SAVING WALL**





EASY TO STORE Space-saving design with folding handle for upright storage and easy cleaning.

Ultimate efficiency and robust design combined with the latest in battery technology. The noiseless and zero emissions LM5 cordless lawn mower sets you up for the future. Choose between collecting, mulching and side discharge – with first-class cut quality, as you have learned to expect from any Cub Cadet mower.






Cub Cadet



ROBUST STEEL MOWER DECK The 53 cm wide steel cutting deck is suitable for uneven terrain.



www.cubcadet.co.uk

VARIABLE DRIVE

Stepless speed control and rear-wheel drive make gardening much easier.

6-FOLD CUTTING HEIGHT **ADJUSTMENT**

The cutting height can be conveniently adjusted centrally lever.



5

60V RANGE

BOOSTED AIRFLOW TECHNOLOGY

For optimal transport of the cuttings to the grass catcher.

ELECTRIC LITHIUM ION

MORE POWER FOR YOUR GARDEN

SO XY

The 60V MAX lithium-ion batteries are interchangeable throughout the range of equipment. If you have power left from one task, swap the battery with another machine to continue on.



60V BATTERY – BP 6025

Capacity / Energy:	2.5 An / 135 Wn
Charging time:	75 min
Weight:	1.2 kg
Part number:	49AP601-603



60V BATTERY – BP 6050 60

Capacity / Energy:	5.0 Ah / 270 Wh
Charging time:	150 min
Weight:	1.9 kg
Part number:	49AP602-603



60V CHARGER – BC 6020

Charging current:	2.0 A
Weight:	0.7 kg
Part number:	49AL601-603

Cruise control to set the speed
Highly efficient brushless motor with maximum service life



60V TRIMMER – LH5 T60

Cutting width: 45 min (2.5 Ah battery) / 90 min (5.0 Ah batter)

33 cm

Line thickness: Ø 2.0 mm, double
Telescopic tube: Standard

Weight without/with battery: 3.6 / 4.8 kg (with 2.5 Ah battery)

60V LEAF BLOWER – LH5 B60


Running time: Up to 90 min (2.5 Ah battery) / Up to 180 min (5.0 Ah battery)

Speed (max.): Up to 180 km/h

Axial fan: Up to 1,080 m³/
Standard

Weight without/with battery: 2.5 / 3.7 kg (with 2.5 Ah batter





- Spirit level allows precise and level cutting
- High-efficiency brushless motor optimises power, performance and longevity

60V CHAINSAW – LH5 C60		
Running time:	Up to 80 min (2.5 Ah battery) / Up to 160 min (5.0 Ah battery)	
Blade length:	40 cm	
Chain speed:	13.5 m/s	
Chain pitch:	3/8"	
Maight without /with hattan	AA / E C kg (with 2 E Ab battom)	


60V HEDGE TRIMMER – LH5 H60

Running time: 80 min (2.5 Ah battery) / 160 min (5.0 Ah batter Cutting movements (max.): 1,500/min

Blade length: 60 cm

Blade spacing: 19 mm

Weight without/with battery: 3.4 / 4.6 kg (with 2.5 Ah battery)



- Oscillating saw at the end of the knife
- Full-bale handle maximises manoeuverability and reduces vibration



Cub Cadet.

	60V LEAF BLOWER LH5 B60	60V HEDGE TRIMMER LH5 H60	60V TRIMMER LH5 T60
FEATURES			
Runtime	Up to 90 min (2.5 Ah battery) / Up to 180 min (5.0 Ah battery)	80 min (2.5 Ah battery) / 160 min (5.0 Ah battery)	45 min (2.5 Ah battery) / 90 min (5.0 Ah battery)
Speed (max.)	Up to 180 km/h	-	-
Air flow	Up to 1,080 m³/h	-	=
Speed stages	Stepless	-	-
Cutting movements (max.)	-	1,500/min	=
Blade length	-	60 cm / 24"	-
Cutting width	-	19 mm	33 cm / 13"
Chain speed	-	-	-
Line thickness	-	-	Ø 2.0 mm, double
Line spool	-	-	Easy winding without removing the reel
MAIN FEATURES			
Axial fan	Standard	-	-
Comfort handle	-	Standard	Standard
Dual action blades	-	Standard	-
DIMENSIONS			
LpA/LwA/LwAg (dB)	89/101/103	79.5/91.5/95	79.5/93/96
Vibration value hand/arm / K-factor	2.5 / 1.5 m/s ²	3.0 / 1.5 m/s ²	3.5 / 1.5 m/s ²
Dimensions (L/W/H)	53 cm / 32 cm / 23 cm	106 cm / 26 cm / 24 cm	106 cm / 26 cm / 24 cm
Net weight	2.5 / 3.7 kg (with 2.5 Ah battery)	3.4 / 4.6 kg (with 2.5 Ah battery)	3.6 / 4.8 kg (with 2.5 Ah battery)

BATTERIES AND CHARGER

	60V BATTERY BP 6025	60V BATTERY BP 6050	60V CHARGER BC 6020
Capacity / Energy	2.5 Ah / 135 Wh	5.0 Ah / 270 Wh	2.0 A Charging current
Charging time	75 min	150 min	_
Voltage	54 V	54 V	-
Net weight	1.2 kg	1.9 kg	0.7 kg

60V CHAINSAW LH5 C60

FEATURES	
Runtime	Up to 80 min (2.5 Ah battery) / Up to 160 min (5.0 Ah battery)
Speed (max.)	-
Air flow	-
Speed stages	-
Cutting movements (max.)	-
Blade length	40 cm / 16"
Cutting width	-
Chain speed	13.5 m/s
Line thickness	-
Line spool	-
MAIN FEATURES	
Axial fan	-
Comfort handle	-
Dual action blades	-
DIMENSIONS	
LpA/LwA/LwAg (dB)	91/102/104
Vibration value hand/arm / K-factor	3.5 / 1.5 m/s ²
Dimensions (L/W/H)	93 / 29 / 27
Net weight	4.4 / 5.6 kg (with 2.5 Ah battery)

60V LAWNMOWER

	LM5 E 51 R	
DRIVE SYSTEM		
Runtime	30 min (5.0 Ah battery)	
Drive	Rear wheel drive	
Driving stages	Variable	
Speed (max.)	Variable	
CUTTING SYSTEM		
Lawn area (rec./up to)	700 m²/h	
Housing (material)	Steel	
Cutting width	51 cm / 20"	
Mowing options	3-in-1	
Cutting height adjustment	Central	
Cutting height (min/max)	38-88 mm	
Bagging	Inclusive	
Mulch Kit	Inclusive	
Side discharge	-	
Rear discharge without grass catcher	Standard	
DISCHARGE SYSTEM		
Grass catcher	Soft bag	
Grass catcher (capacity)	60 I	
Filling level indicator	-	
WHEELS		
Wheels (f/r)	150 mm / 200 mm	
Wheel bearing	Double ball bearings	
COMFORT		
Cutting deck washing nozzle	-	
Bar	Ergo with softgrip	
Folding bar	Standard	
Height-adjustable bar	Standard, 3 steps	
Soft-Grip	Standard	
DIMENSIONS		
Vibration value hand/arm / K-factor	2.5 / 1.5 m/s ²	



Dimensions (L/W/H)

Net weight

160 cm / 56 cm / 110 cm

32 kg





HYDROSTATIC

DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission provides you with optimal manoeuvrability. Available on the XZ Series.

SYNCHRO STEER® TECHNOLOGY



UNBEATABLE MANOEUVRABILITY AND UNMATCHED CLIMBING ABILITY

Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but with full control of the front wheels.

Steering and drive are perfectly synchronised to ensure the exact speed and rotating direction of each rear wheel, whatever the position of the front wheels. This revolutionary technology is available for the XZ3 and XZ6 Series.

MODEL AVAILABLE



XZ3 122

Cutting width:	122 cm / 48"
Mowing area:	11,000 m²/h
Grass bag capacity:	300 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions

KEY BENEFITS



ADJUSTABLE STEERING COLUMN

The XZ3 is equipped with an adjustable steering column ensuring you find the perfect position.



PNEUMATIC FRONT WHEELS

Controllable pneumatic front wheels which support the Zero-Turn of your XZ3.





STEERING WHEEL A soft grip steering wheel for great control in tough conditions.



ROLLERS

DEFLECTOR Helps spread the cuttings over



a large area.

LARGE SIDE EJECTION

cornering tight bends.

COMFORTABLE SEAT

The high-back seat with armrests

ensures that your work will

ROUNDED MOWING DECK

Prevent damage to the turf when

WITH ARMRESTS

be done in comfort.

FLOATING CUTTING DECK

The floating deck follows the contours of the ground for superior cutting, providing a smoother and more uniform look.



For more

information

and videos.

www.cubcadet.co.uk

ZERO-TURNS / 94

93 / ZERO-TURNS

High-performance meets practicality.

with this added traction and control.

ZERO-TURNS. INFINITE STRENGTH.

deck delivering effective and efficient mulching capabilities. A superior mulcher.

The Cub Cadet XZ3 122 has a heavy-duty, fabricated 122 cm / 48" deck with the versatility to mow around

fences and trees. The easy-to-see centrally mounted deck maximises mowing accuracy in corners and under

low obstacles. A low centre of gravity and wide wheelbase allow the machine to glide over uneven ground

and still cut in a completely straight line across hills and slopes. Tough terrain and steep hills are no problem

The advanced mulching technology incorporated in this machine re-circulates the airflow around the cutting

Cub Cadet

ENDURO SERIES





KEY BENEFITS



BUILT WITH STRENGTH

Our continuous lightweight tubular steel frame is designed for strength and durability.



LAP BAR CONTROLLED **DUAL HYDROSTATIC TRANSMISSION**

With mow in reverse.



EXTREMELY POWERFUL

Cub Cadet and Kawasaki engines, mean the ULTIMA XZ5 models reach up to 12km/h, mowing up to 50% faster than front mowers.



EXCEPTIONALLY LOW VIBRATION

With ergonomic soft grips and rubber floor mats.



OPEN FRAME DESIGN

Hinged/removable floor pan allowing quick and easy access to the deck and engine for ease of maintenance.



INDIVIDUALLY ADJUSTABLE COMFORT SEAT

With high backrest and armrests for comfortable and fatigue-free working.



LARGEST TYRES OF ITS CLASS

The premium tyres of the XZ5 127 and XZ5 137 provide better traction and more stability and control.



ULTRA-BRIGHT LED HEADLIGHTS

Best visibility in poor lighting conditions, for example at dawn and dusk.

MODELS AVAILABLE



XZ5 L107

Cutting width:	107 cm / 42"
Mowing area:	10,000 m ² /h
Grass bag capacity:	Optional 230 I
Engine:	Cub Cadet, V-Twin dual cylinder
Engine displacement:	679 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions



XZ5 L127

Cutting width:	127 cm / 50"
Mowing area:	11,500 m ² /h
Grass bag capacity:	Optional 230 I
Engine:	Kawasaki OHV, V-Twin dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions



XZ5 L137

Cutting width:	137 cm / 54"
Mowing area:	12,500 m ² /h
Grass bag capacity:	Optional 230 I
Engine:	Kawasaki OHV, V-Twin dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions

www.cubcadet.co.uk **ZERO-TURNS / 96**

your business and your lawns.

The Ultima Series™ from Cub Cadet. Professional grade power for





STEERING THE WAY FORWARD

The new models in the XZ6 Ultima ENDURO series will give you unmatched steering capabilities in challenging terrains. You can mow easily in comfort. The industry-leading SynchroSteer® technology for full control of the front wheels, combined with powerful Cub Cadet and Kawasaki engines makes the XZ6 series the ideal machines for large lawn maintenance.

KEY BENEFITS



BUILT WITH STRENGTH

Our continuous lightweight tubular steel frame is designed for strength and durability. A fabricated mowing deck ensures unsurpassed mowing performance.



ULTRA-BRIGHT LED HEADLIGHTS

Best visibility in poor lighting conditions, for example at dawn and dusk.



EXCEPTIONALLY LOW VIBRATION

With ergonomic soft grips and rubber floor mats.



SYNCHRO STEER® TECHNOLOGY

UNBEATABLE MANOEUVRABILITY AND UNMATCHED CLIMBING ABILITY

Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but with full control of the front wheels.

Steering and drive are perfectly synchronised to ensure the exact speed and rotating direction of each rear wheel, whatever the position of the front wheels.



OPEN FRAME DESIGN

Hinged/removable floor pan allowing quick and easy access to the deck and engine for ease of maintenance.

MODELS AVAILABLE



XZ6 S107

Cutting width:	107cm / 42"
Mowing area:	10,000 m ² /h
Engine:	Cub Cadet V-Twin dual cylinder
Engine displacement:	679cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Deck wheels:	2 front



XZ6 S117

Cutting width:	117cm / 46"
Mowing area:	10,500 m ² /h
Engine:	Kawasaki V-Twin dual cylinder
Engine displacement:	726cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Deck wheels:	2 front



XZ6 S127

Cutting width:	127cm / 50"
Mowing area:	11,500 m ² /h
Engine:	Kawasaki V-Twin dual cylinder
Engine displacement:	726cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Deck wheels:	2 front and 1 nose

www.cubcadet.co.uk





DESIGNED FOR EVERY CHALLENGE

The top of the range models in the XZ7 Ultima ENDURO series make an even greater impression with their improved stability and durability. You can mow easily in maximum comfort, even under the most difficult conditions. The latest steering lever lap bar technology combined with the extremely robust construction of heavy-duty components and high-performance engine makes the XZ7 Ultima series the ideal machines for very large lawn maintenance.

KEY BENEFITS



ROBUST MOWING DECK

The robust tubular steel frame as well as the welded, all-round reinforced AeroForce Max[™] mowing deck provides the necessary strength for a consistently high quality cut.



SPRING-MOUNTED FRONT-WHEEL SUSPENSION

The individually-suspended wheels ensure a smooth ride with less vibration, even on the most difficult lawns.



MAXIMUM COMFORT

The premium seat with a high backrest has padded armrests and special cushioning. This significantly reduces vibrations even at high speeds, for comfortable and fatigue-free mowing.



INFINITE DIVERSITY

In addition to the included mulching kit, the standard rear hitch gives you the option to combine your XZ7 with a wide variety of accessories. This means you can use your XZ7 all year round.



*Whichever comes first

OUTSTANDING GRASS COLLECTION

The AeroForce Max[™] mowing deck uses the air flow from the rotating blades to propel the grass clippings in a high arc into the optional collecting bag. This fills the bag to the top without clumping. (Dependant on conditions)



GUARANTEED DURABILITY

We trust our new XZ7 models with maximum durability and robustness and offer a warranty of 3 years or up to 500 working hours* – for commercial or private use.

MODELS AVAILABLE





XZ7 L122 - ULTIMA

Cutting width:	122cm / 48"
Area performance (rec.):	11,000 m ² /h
Collecting volume:	Optional 380 I
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	16 positions

XZ7 L152i - ULTIMA

Cutting width:	152cm / 60"
Area performance (rec.):	15,000 m ² /h
Collecting volume:	Optional 380 I
Engine:	KOHLER EFI, V-TWIN dual cylinder
Engine displacement:	747 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	16 positions

	XZ3 122	XZ5 L107	XZ5 L127
ENGINE	· · · · · · · · · · · · · · · · · · ·		
Engine type	Kawasaki OHV	Cub Cadet	Kawasaki OHV
Engine displacement	726 cm³	679 cm³	726 cm³
Rated power	12.3 kW / 2,750 min ⁻¹	11.4 kW / 2,350 min ⁻¹	14.7 kW / 2,900 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-Twin dual cylinder	V-Twin dual cylinder
Tank volume (capacity)	Dual 8.5 litre fuel tanks	13.25	13.25 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM			
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Dual foot pedal control	Control lever	Control lever
Cruise control	Standard	_	-
CUTTING SYSTEM			
Mowing area in m²/h	11,000	10,000	11.500
Cutting width	122 cm / 48"	107 cm / 42"	127 cm / 50"
Cutting height (min-max)	25–102 mm	25–115 mm	25–115 mm
Cutting options	3-in-1 Option	3-in-1 Option	3-in-1 Option
Number of blades	3	2	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	15	15 positions	15 positions
Deck wheels	2	2	3
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity in I)/accessory no.	Triple 300 I optional/(19A70040100)	Optional 230 I/(19B70054100)	Optional 230 I/(19A70055100)
Grass deflector	Standard	Standard	Standard
FRAME			
Front axle	Cast-iron	Steel	Steel
Front bumper/rear bumper	Standard/-	-/-	-/-
Turning circle	0 cm	0 cm	0 cm
Wheel size (f/r)	13" x 5" / 20" x 10"	11" x 6" / 20" x 8"	11 x 6 / 20" x 10"
Wheel bearings	Ball-bearings		
ELECTRICAL SYSTEM	12.1/1222.024	49.4/200.004	40.1/1000.001
Battery	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	Standard	Standard
Hour metre/service minder	Standard		
		-	Standard
Safety systems	Operator presence, brake switch, deck clutch switch	-	Standard –
Safety systems COMFORT	Operator presence.	-	Standard –
	Operator presence.	High back, with armrests	Standard - High back with armrests
COMFORT	Operator presence, brake switch, deck clutch switch High back with armrests and	High back, with armrests Quick adjuster lever	-
COMFORT Seat type	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension		High back with armrests
COMFORT Seat type Seat adjustment	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension Quick adjuster lever	Quick adjuster lever 2-way adjustable lap bars	High back with armrests Quick adjuster lever 2-way adjustable lap bars
COMFORT Seat type Seat adjustment Steering wheel	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension Quick adjuster lever Soft-Grip, adjustable steering column	Quick adjuster lever 2-way adjustable lap bars with comfort grips	High back with armrests Quick adjuster lever 2-way adjustable lap bars with comfort grips
COMFORT Seat type Seat adjustment Steering wheel Utility bin	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension Quick adjuster lever Soft-Grip, adjustable steering column Standard	Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard	High back with armrests Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard
COMFORT Seat type Seat adjustment Steering wheel Utility bin Mow in reverse (RevTEK™)	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension Quick adjuster lever Soft-Grip, adjustable steering column Standard	Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard	High back with armrests Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard
COMFORT Seat type Seat adjustment Steering wheel Utility bin Mow in reverse (RevTEK™) DIMENSIONS	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension Quick adjuster lever Soft-Grip, adjustable steering column Standard Standard	Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard Standard	High back with armrests Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard Standard
COMFORT Seat type Seat adjustment Steering wheel Utility bin Mow in reverse (RevTEK™) DIMENSIONS Vibration value body/K-factor Vibration value	Operator presence, brake switch, deck clutch switch High back with armrests and gel suspension Quick adjuster lever Soft-Grip, adjustable steering column Standard Standard 1 / 0.5 m/s²	Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard Standard 1 / 0.5 m/s²	High back with armrests Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard Standard 1 / 0.5 m/s²

	NEW	NEW	
XZ5 L137	XZ6 S107	XZ6 S117	

	XZ5 L137	XZ6 S107	XZ6 S117
ENGINE			
Engine type	Kawasaki OHV	Cub Cadet	Kawasaki
Engine displacement	726 cm³	679 cm³	726 cm³
Rated power	14.7 kW / 2,900 min ⁻¹	11.4 kW / 2,350 min ⁻¹	14.7 kW / 2,900 min ⁻¹
Cylinders	V-Twin dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	13.25 l	13.25	13.25 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM			
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Control lever	Dual foot pedal control	Dual foot pedal control
Cruise control	-	-	-
CUTTING SYSTEM			
Mowing area in m²h	12.500	10,000	10,500
Cutting width	137 cm / 54"	107 cm / 42"	117 cm / 46"
Cutting height (min-max)	25–115 mm	25–114 mm	25–114 mm
Cutting options	3-in-1 Option	3-in-1 option	3-in-1 option
Number of blades	3	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	15 positions	15 positions	15 positions
Deck wheels	3	2	2
Wash nozzle/Mulch Kit	Standard/Standard	-/Standard	-/Standard
DISCHARGE SYSTEM			
Bag (capacity in I)/accessory no.	Optional 230 I/(19A70055100)	Optional 230 I/(19B70054100 + 490-950-C062)	Optional 230 I/(19B70054100 + 490-950-C062)
Grass deflector	Standard	Standard	Standard
FRAME			
Front axle	Steel	Steel	Steel
Front bumper/rear bumper	-/-	-/-	-/-
Turning circle	0 cm	0 cm	0 cm
Wheel size (f/r in inch)	13 x 6.5 / 20" x 12"	13 x 6.5 / 20" x 8"	13 x 6.5 / 20" x 10"
Wheel bearings	-	Sleeve bearings	Sleeve bearings
ELECTRICAL SYSTEM			
Battery	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	Standard	-	-
Hour metre/service minder	Standard	_	Standard
Safety systems	-	Operator presence, brake switch, deck clutch switch	Operator presence, brake switch, deck clutch switch
COMFORT			
Seat type	High back with armrests	High back with arm rests	High back, with arm rests
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	Soft-Grip, tilt steering column	Soft-Grip, tilt steering column
Utility bin	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1 / 0.5 m/s²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	203 cm / 164 cm / 117 cm	203 cm / 132 cm / 114 cm	203 cm / 126 cm / 114 cm
Net weight	312 kg	267 kg	285 kg

NEW

XZ6 S127	XZ7 L122 - ULTIMA	XZ7 L152i - ULTIMA
----------	-------------------	--------------------

	7120 0 2 2 7	7127 2222	
ENGINE			
Engine type	Kawasaki	Kawasaki	KOHLER EFI
Engine displacement	726 cm ³	726 cm ³	747 cm³
Rated power	14.7 kW / 2,900 min ⁻¹	14.4 kW / 2,700 min ⁻¹	14.8 kW / 2,700 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	13.25	20.8	20.8
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM			
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Dual foot pedal control	Control lever	Control lever
Cruise control		_	Standard
CUTTING SYSTEM			
Lawn area (rec./up to)	11,500 m²/h	11,000 m²/h	15,000 m²/h
Cutting width	127 cm / 50"	122 cm / 48"	152cm / 60"
Cutting height (min-max)	25–114 mm	25–114 mm	25–114 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	3	3	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	15 positions	16 positions	16 positions
Deck wheels	3	2	2 + Nose
Wash nozzle/Mulch Kit	–/Standard	–/Standard	–/Standard
DISCHARGE SYSTEM			
Bag (capacity in I)/accessory no.	Optional 230 I/(19B70055100 + 490-950-C062)	Optional 380 I/(49A70001100)	Optional 380 I/(49A70002100)
Grass deflector	Standard	Standard	Standard
FRAME			
Front axle	Steel	Steel, with front wheel suspension	Steel, with front wheel suspension
Front bumper/rear bumper	-/-	– / Tubular steel frame	– / Tubular steel frame
Turning radius (cm)	0 cm	0 cm	0 cm
Wheel size (f/r in inch)	13 x 6.5 / 20 x 12	13 x 6.5 / 20 x 12	13 x 6.5 / 24 x 12
Wheel bearings	Ball-bearings	n/a	n/a
ELECTRICAL SYSTEM			
Battery	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	LED	LED
Hour metre/service minder	Standard	Standard	Standard
Safety systems	Operator presence, brake switch, deck clutch switch	Standard	Standard
COMFORT			
Seat type	High back, with arm rests	Premium, high back with armrests	Premium, high back with armrests, individually adjustable suspension
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip, tilt steering column	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips
Utility bin	Standard	Standard	Standard
Mow in reverse	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value body/ it lactor	1.0 / 0.3 11/5	/ / -	-, - , -
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Vibration value			i i

XZ ACCESSORIES

GRASS BAG		
Twin Bag for XZ3 122	Part number: 19A70040100	
Twin Bag for XZ5 L107, XZ6 S107 & XZ6 S117	Part number: 19B70054100	
Twin Bag for XZ5 L127, XZ5 L137 & XZ6 S127	Part number: 19B70055100	
Triple Bag for XZ7 122	Part number: 49A70001100	
Triple Bag for XZ7 152	Part number: 49A70002100	
Weight Bracket Kit (to fit XZ6)	Part number: 490-950-C062	







PRO SERIES

PRO SERIES












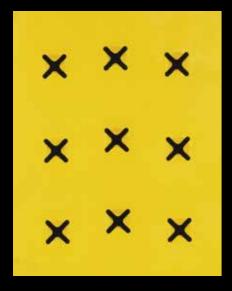



BUILT FOR YOUR BUSINESS.

When you are looking to update your commercial mowers the key things to consider are performance, durability and operator comfort.

Proven by landscape professionals our PRO Z series of zero-turns will fulfil all your commercial requirements. Providing a fast, premium quality cut, unmatched user comfort and ultimately built for the long haul. Perfect for the challenging environments you face everyday.

The PRO Z series is our strongest, most efficient line up of zero-turn machines.

LESS DOWNTIME, MORE GO TIME.

www.cubcadet.co.uk PRO SERIES / 108


PERFORMANCE AND AMAZING MANOEUVRABILITY.

Our patented SyncroSteer® technology with steering wheel means that inexperienced operators can easily use the steering wheel and Dual Hydrostatic Transmission to control all four wheels, minimising the turf being churned up by the wheels and ensuring the ultimate manoeuvrability – an exclusive offering in the commercial sector.

- Reduces mowing time by up to 10% compared to lap bar mowers
- Delivers true zero-turn handling with less overlap and straighter lines
- Four-wheel steering control ensures unmatched hillside stability and enhanced traction on uneven terrain


GREATER STABILITY AND CONTROL ON BANKS AND SLOPES

Steering wheel control and a wide stance provide better stability and control on banks and slopes up to 25°.

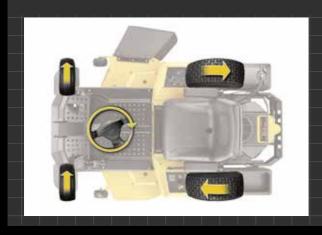

DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission ensures the ultimate manoeuvrability and control.

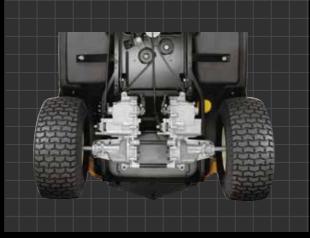

CUT EVERYTHING INCLUDING DOWNTIME.

The frame and axle on the Z5, Z7 and Z9 powers through the thickest grass in one pass at maximum speeds of up to 12mph meaning you can do the job quicker. High torque commercial transmissions are paired with high horsepower commercial-grade engines to provide optimal and consistent blade speed. A 3" blade overlap ensures a tight, consistent cut. The frame and axle on the Z5 and Z7 float as the machine moves allowing the deck to follow the terrain and stop scalping.

Commercial grade petrol engines rather than diesel from Kohler and Kawasaki provide the consistent power you need to get the job done and maximise your work-day – reducing the downtime which could cost you both time and money. The petrol engines benefit from having lower emissions and reduced fuel usage.

KAWASAKI® HIGH-HORSEPOWER ENGINES



- Maximum horsepower in every series
- Optimum balance of torque and power
- ▶ Maximise blade tip speed, up to 18,500 fpm

Shown is the: Kawasaki® FX Series 35 hp* (999 cc).


www.cubcadet.co.uk 109 / PRO SERIES PRO SERIES / 110





HEAVY DUTY, FOR THE LONG HAUL.

From frame to yoke every part of the PRO Z is designed to handle the serious rigours of commercial mowing. The thickness of the cutting deck established a new industry standard as the only triple-7-gauge steel cutting deck making it extremely durable for your demanding conditions.

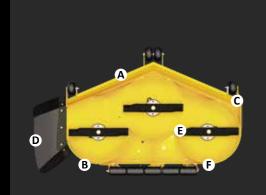

THE THICKEST, STRONGEST STEEL DECK IN THE INDUSTRY

Tackle the toughest conditions with the industry's only triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements.

DURABILITY


- A 1/4" leading rolled edge
- **B** 5/16" steel side reinforcements
- C 3/4" wear guard

QUALITY CUT

- **D** Flexible rubber discharge chute
- E High-lift Marbain® blades (with blade tip speed up to 18,500 fpm)
- F Adjustable rear stripping roller (Optional extra on Z1 and Z5)

BEEFED-UP FRONT END Absorb the impact of rough

terrain with a new front-end construction featuring a best-in-class combination of axle, hub and yoke size.

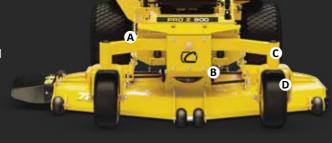

- A 2" x 3" pivoting front axle
- B Isolation damping system (Standard on the Z7 and Z9)
- C 5" steel hubs
- D 1/2" thick steel front yokes



WORK HARD, RIDE EASY.

The PRO Z can take a beating, but your body shouldn't. Comfort is at the forefront of every machine's design. Your operators can experience a smooth ride all day long thanks to the cushioned and isolated dampening system on the top of the range Z7 – meaning they are working in vibration-controlled comfort, lessening downtime for your business.

Angled back adjustments, padded armrest and lumbar support give added protection across the whole range.

The PRO Z Series is specifically tailored to landscape professionals as each machine, built with ground-breaking features, delivers a strong and comfortable performance, perfect for the challenging environments faced by your business on a daily basis.



VIBRATION CONTROLLED COMFORT

PRO Z AIR-RIDE SEAT

Our exclusive air-ride seat allows riders to adjust the seat firmness to their personal preference.

- A Isolation damping system under the seat (PRO Z 5/7/9)
- B Lumbar support
- **C** EVC cushion (elastic vibration control)
- **D** Angle adjustment
- E Padded armrests



the front end to ride across unseen terrain while protecting

the quality of the cut.

The frame and axle float as the PRO Z moves, allowing the deck to follow the terrain profile and avoid scalping.

111 / PRO SERIES www.cubcadet.co.uk PRO SERIES / 112













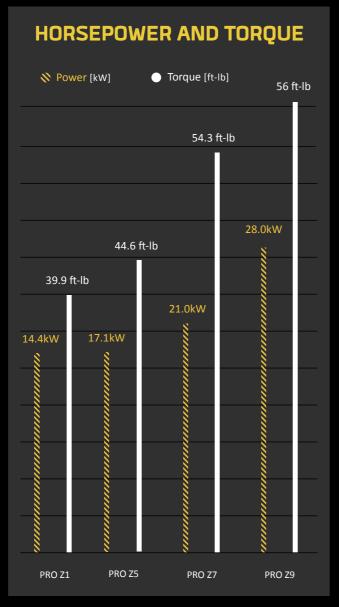

E-COATING

PRO Z mowers are protected with e-coating; a precise, multi-stage process that provides automotive-grade corrosion defense.

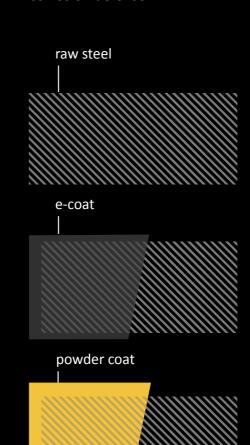





www.cubcadet.co.uk 113 / PRO SERIES PRO SERIES / 114





KOHLER CONFIDANT EFI EZT 745

Z1 137

The Z1 137 will exceed your expectations, not your budget. Equipped with a powerful cutting deck, it will always produce a commercial-quality cut with landscaper-approved speed, efficiency and comfort.



A POWER MACHINE

With its fast speed of up to 9.5mph / 15km/h, the Z1 137 is at least twice as fast as a normal lawn tractor, excelling in efficiency.

B MORE COMFORTABLE THAN EVER

High-comfort seat, suspension and non-slip controls guarantee safe and fatigue-free work.

C MARKET-LEADING EFFICIENCY

25 % less fuel consumption with electronic fuel injection (EFI).

D STRONG AND ROBUST

Welded mowing deck with 137 cm / 54" cutting width for endless power.

E EXTREMELY AGILE

The unique 360° turning radius technology helps you negotiate tight corners and obstacles easily.

Cutting width:	137 cm, 54"
Area performance (rec.):	13,500 m²/h
Discharge type:	Side discharge
Engine:	KOHLER Confidant EFI EZT 745, V-TWIN dual cylinder
Engine displacement:	747 cm ³
Drive:	Dual Hydrostatic
Transmission:	Hydrogear ZT3400
Max. speed:	15 km/h (forward)/7 km/h (reverse), 9.5mph (forward) / 4.5mph (reverse)
Cutting height adjustment:	17 positions
Fuel tank capacity:	2 x 15 litres

www.cubcadet.co.uk 115 / PRO SERIES PRO SERIES / 116

Powered by **Kawasaki**





V-TWIN DUAL CYLINDER

Z5 152

Amazing strength and unsurpassed comfort – the perfect combination for true professionals The Z5 152 maximises your work day with an efficient engine, larger fuel capacity and industry leading commercial cutting deck.



Area performance (rec.): 15,000 m²/h Kawasaki OHV, V-TWIN dual cylinder Parker HTG 12 cc Max. speed: 16 km/h (forward)/8 km/h (reverse), 10mph (forward) / 5mph (reverse) Cutting height adjustment: 17 positions Fuel tank capacity: 2 x 34 litres

www.cubcadet.co.uk 117 / PRO SERIES PRO SERIES / 118





KAWASAKI 31 HP ENGINE

Z7 183

The Z7 183 makes a hard day's work easy. Step up to greater power; higher top speeds of up to 19.5kmh/12mph, more comfort and a large 183cm/72" cutting deck.



A POWER MACHINE

With its fast speed of 12mph / 19.5km/h, the Z7 183 is at least twice as fast as a normal lawn tractor, excelling in efficiency.

B MORE COMFORTABLE THAN EVER
High-comfort seat, suspension and non-slip
controls guarantee safe and fatigue-free work.

C STRONG AND ROBUST

Welded mowing deck with 183 cm / 72" cutting width for endless power.

D EXTREMELY AGILE

The unique 360° turning radius technology helps you negotiate tight corners and obstacles easily.

Cutting width:	183 cm, 72"
Area performance (rec.):	18,000 m²/h
Discharge type:	Side discharge
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	999 cm ³
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 14 cc
Max. speed:	19.5 km/h (forward)/10 km/h (reverse), 12mph (forward) / 6mph (reverse)
Cutting height adjustment:	17 positions
Fuel tank capacity:	2 x 34 litres with fuel gauge

119 / PRO SERIES www.cubcadet.co.uk PRO SERIES / 120





KAWASAKI FX 1000V EFI V-TWIN DUAL CYLINDER

121 / PRO SERIES

Z9 183id

The Z9 183id is a commercial zero-turn mower with extremely wide double wheels – developed to effortlessly tackle even the steepest slopes, up to 25° / 46%. The Z9 has an extremely robust and multi-reinforced steel cutting deck, outstanding mowing performance and air-cushioned seat for comfortable mowing all day long. Ideal for commercial users and owners of large properties with challenging terrain, the Z9 will deliver a quality cut time and time again.



on steep slopes are easy.

WORK EFFORTLESSLY AND DRIVE COMFORTABLY

With the comfort features like power steering, you can enjoy a relaxed ride all day long. The exclusive air ride seat adjusts the seat firmness to your personal preferences.

ELECTRONICALLY ADJUSTABLE CUTTING DECK

Adjust the cutting deck to the specific requirements with just the touch of a button. steering ensure maximum stability and precision even on steep slopes with inclines of up to 25° / 46%.

POWER AND ECONOMY COMBINED

Thanks to the electronic direct fuel injection, the robust Kawasaki engine combines maximum performance with comparatively low fuel consumption.

RELIABLE AND SAFE

Cub Cadet gives you a commercial warranty of 3 years or up to 1000 working hours* on the new Z9 183id.

Cutting width:	183cm, 72"
Area performance (rec.):	18,000 m ² /h
Discharge type:	Side discharge
Engine:	Kawasaki FX1000V EFI, V-TWIN dual cylinder
Engine displacement:	999 cm ³
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 16cc
Max. speed:	19.5 km/h (forward) / 10 km/h (reverse), 12mph (forward) / 6mph (reverse)
Cutting height adjustment:	17 positions
Fuel capacity:	2 x 34 litres with fuel gauge

www.cubcadet.co.uk PRO SERIES / 122



Z1 137 Z5 152

	Z1 13/	Z5 15Z
ENGINE		
Engine type	KOHLER Confidant EFI EZT 745	Kawasaki OHV
Engine displacement	747 cm³	852 cm³
Rated power	14.4 kW / 2,300 min ⁻¹	17.15 kW / 2,500 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	2 x 15 l	2 x 34 l
Drive	Dual Hydrostatic	Dual Hydrostatic
Transmission	Hydrogear ZT3400	Parker HTG 12 cc
Lubrication	Pressure oil lubrication	Pressure oil lubrication
CUTTING SYSTEM		
Area performance (rec.)	13,500 m²/h	15,000 m²/h
Cutting width	137cm / 54"	152cm / 60"
Cutting height (min-max)	26–127 mm	26–127 mm
Cutting options	2-in-1	2-in-1
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	17 positions	17 positions
Deck wheels	4 + 2 Nose	4 + 2 front roller
Mulch Kit	Standard	Standard
DISCHARGE SYSTEM		
Ejection type	Side discharge	Side discharge
Grass deflector	Standard	Standard
FRAME		
Front bumper/rear bumper	– / Standard	– / Standard
Turning circle	0 cm	0 cm
Wheel size (f/r in inch)	13 x 6.5 / 24 x 12	15 x 6 / 24 x 12
Wheel bearings	Ball bearings	Ball bearings
ELECTRICAL SYSTEM		
Battery	230 CCA	230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Rollover bar	Rollover bar
COMFORT		
Seat type	High back, adjustable	High back with armrests, adjustable
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip	Soft-Grip
Utility bin	-	-
Mow in reverse	Standard	Standard
Battery charger	_	_
DIMENSIONS		
Vibration value body/K-Factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm/K-Factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	180 cm / 145 cm / 130 cm	230 cm / 160 cm / 134 cm
Net weight	360 kg	680 kg

	Z7 183	Z9 183id
ENGINE		
Engine type	Kawasaki OHV	Kawasaki FX1000V EFI
Engine displacement	999 cm³	999 cm³
Rated power	21 kW / 2,750 min ⁻¹	28 kW / 2,600 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	2 x 34 l with fuel gauge	2 x 34 l, with fuel indicator
Drive	Dual Hydrostatic	Dual Hydrostatic
Transmission	Parker HTG 14 cc	Parker HTG 16cc
Lubrication	Pressure oil lubrication	Pressure oil lubrication
CUTTING SYSTEM		
Area performance (rec.)	18,000 m²/h	18,000 m²/h
Cutting width	183cm / 72"	183cm / 72"
Cutting height (min-max)	26–127 mm	26–127 mm
Cutting options	2-in-1	2-in-1
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	17 positions	17 positions
Deck wheels	4 + 2 Nose + 1 deck rear rollers	4 + 2 Nose + 1 deck rear rollers
Mulch Kit	Standard	Standard
DISCHARGE SYSTEM		
Ejection type	Side discharge	Side discharge
Grass deflector	Standard	Standard
FRAME		
Front bumper/rear bumper	– / Standard	– / Standard
Turning circle	0 cm	0 cm
Wheel size (f/r in inch)	16 x 6.5 / 24 x 12	16 x 6.5 / 24 x 12
Wheel bearings	Ball bearings	n.a.
ELECTRICAL SYSTEM		
Battery	230 CCA	230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Rollover bar	Rollover bar
COMFORT		
Seat type	High back with armrests, adjustable	High back with armrests, individually adjustable
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip	Soft-Grip
Utility bin	-	Standard
Mow in reverse	Standard	Standard
Battery charger	-	-
DIMENSIONS		
Vibration value body/K-Factor	1.0 / 0.5 m/s²	1.0 / 0.5 m/s ²
Vibration value hand/arm/K-Factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	226 cm / 185 cm / 131 cm	223 cm / 216 cm / 132 cm
Net weight	732 kg	840kg

123 / PRO SERIES www.cubcadet.co.uk PRO SERIES / 124

PRO SERIES ACCESSORIES




SNOW CHAINS	
Snow chains for Z1	Part number: 490-241-0026
Snow chains for Z5 and Z7	Part number: 490-241-0036



DOZER BLADE	
Dozer blade for Z5 and Z7	Part number: 59B30036150



ELECTRIC DECK LIFT KIT	
Electric deck lift for Z1	Part number: 19B70045100
Electric deck lift for Z5 and Z7	Part number: 59A30050150



HEAVY DUTY LAWN STRIPING KIT	
Heavy duty lawn striping kit for Z1	Part number: 19A70019100
Heavy duty lawn striping kit for Z5, Z7 and Z9	Part number: 59A30052150

CUB CADET: BUILT IN AMERICA **SINCE 1961**

Cub Cadet products are thoughtfully designed around people who depend on us - at home, or on the job out in the elements. And we're proud to say we've built them in America since 1961. Today, we're building our products and strengthening work forces and local communities in Ohio, Kentucky, Tennessee and Mississippi. In each of our manufacturing plants across the country, you'll always find the spirit of Cub Cadet hard work, commitment and a passion for quality.



BUILT USING THE HIGHEST QUALITY COMPONENTS SOURCED LOCALLY AND GLOBALLY

WARRANTY

Cub Cadet offers a three year domestic user warranty across the entire range of garden machinery, plus a free 1 year extended warranty for all XR5 robotic mowers. This is great news for both customers and dealers, inspiring confidence in the quality and reliability of Cub Cadet products. Details of terms and conditions can be found at www.cubcadet.co.uk.

3 year warranty for all garden machinery



3 year warranty plus free 1 year extended warranty for XR5 robotic mowers




The extended warranty PLUS is the best protection for your Cub Cadet XR5 and it's free. Just register your device on the website within 3 months of purchase and enjoy a 4th year of warranty for free. Plus additional protection against damage and loss. If during the 4 years a failure occurs in your registered XR5 and it is covered by the warranty conditions then the unit will be repaired with no cost to you, for TOTAL peace of mind. For full details go to cubcadet.co.uk

Text and photographs, specifications of dimensions and performance are composed with greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only. Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the vehicle itself for more details.

Some models may not be available due to worldwide component shortage issues. Ask your local dealer for more information.









@CubCadet uk

Cub Cadet Supported by Barrus

E. P. Barrus Ltd, Glen Way, Launton Road, Bicester, Oxfordshire. OX26 4UR Tel: 01869 363658 Fax: 08714 290936 www.cubcadet.co.uk

Joc No. 4526